
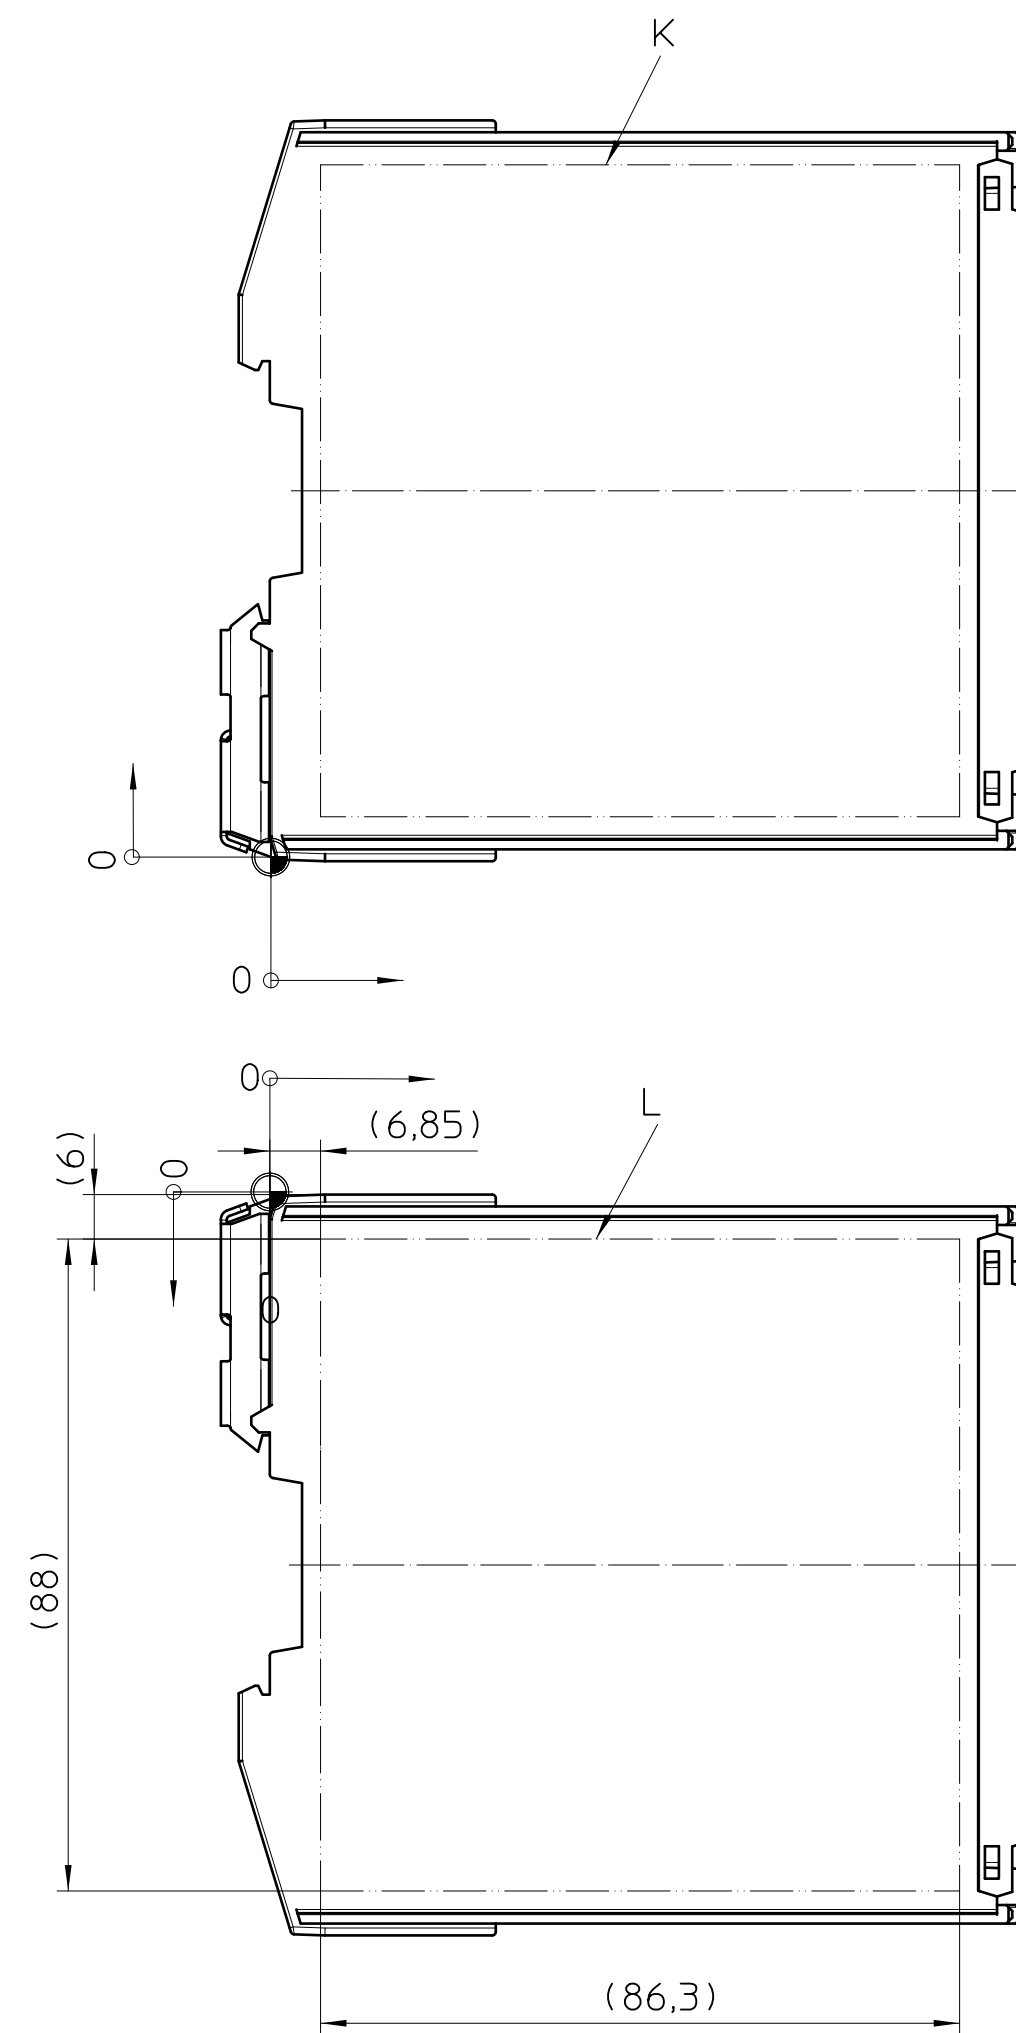
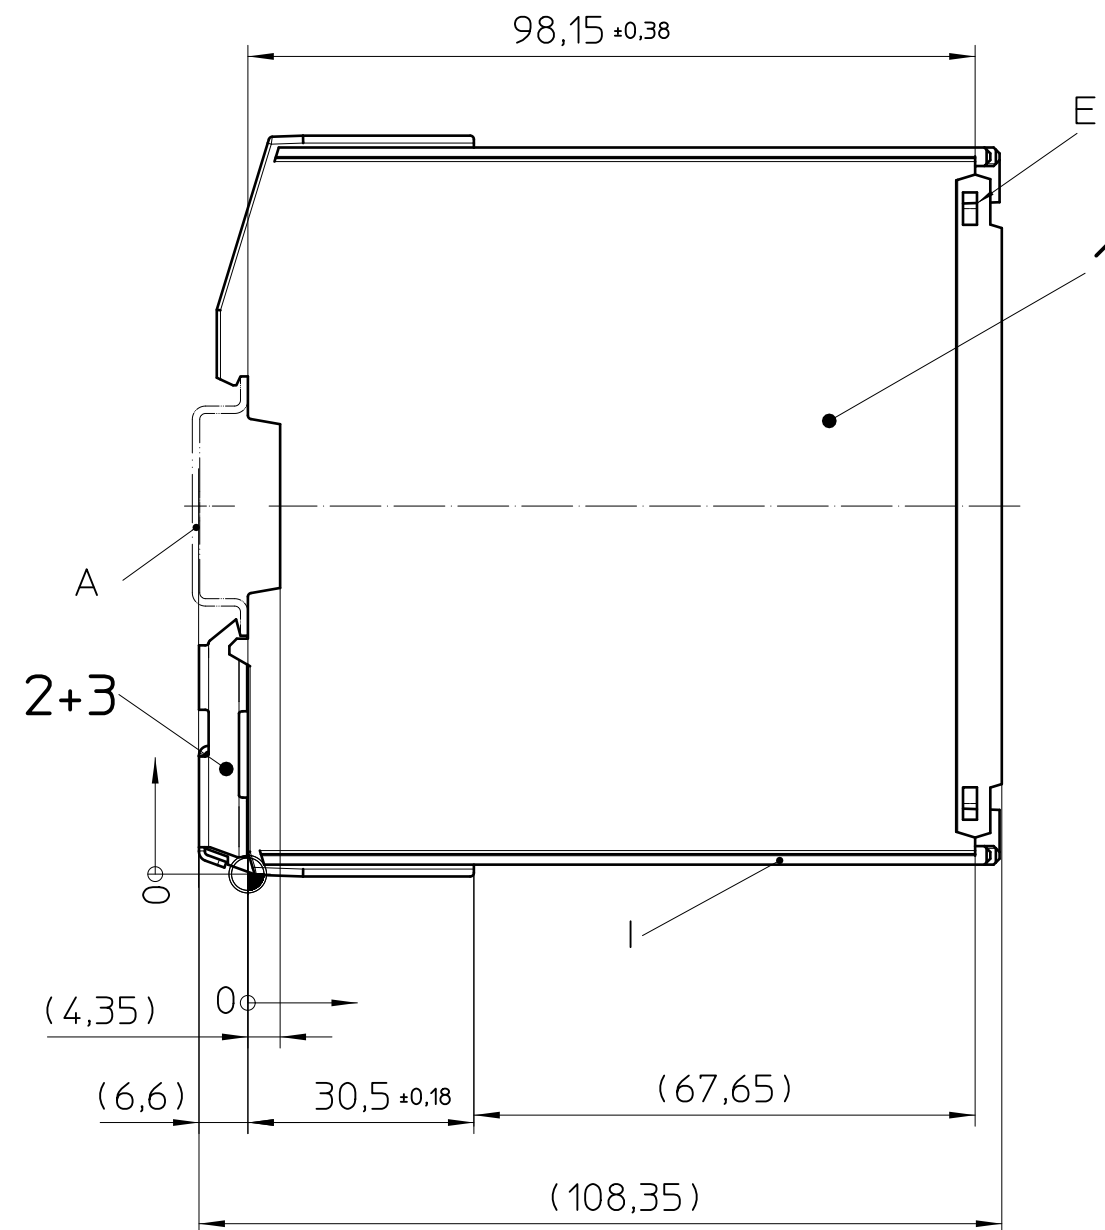


BOTTOM PART


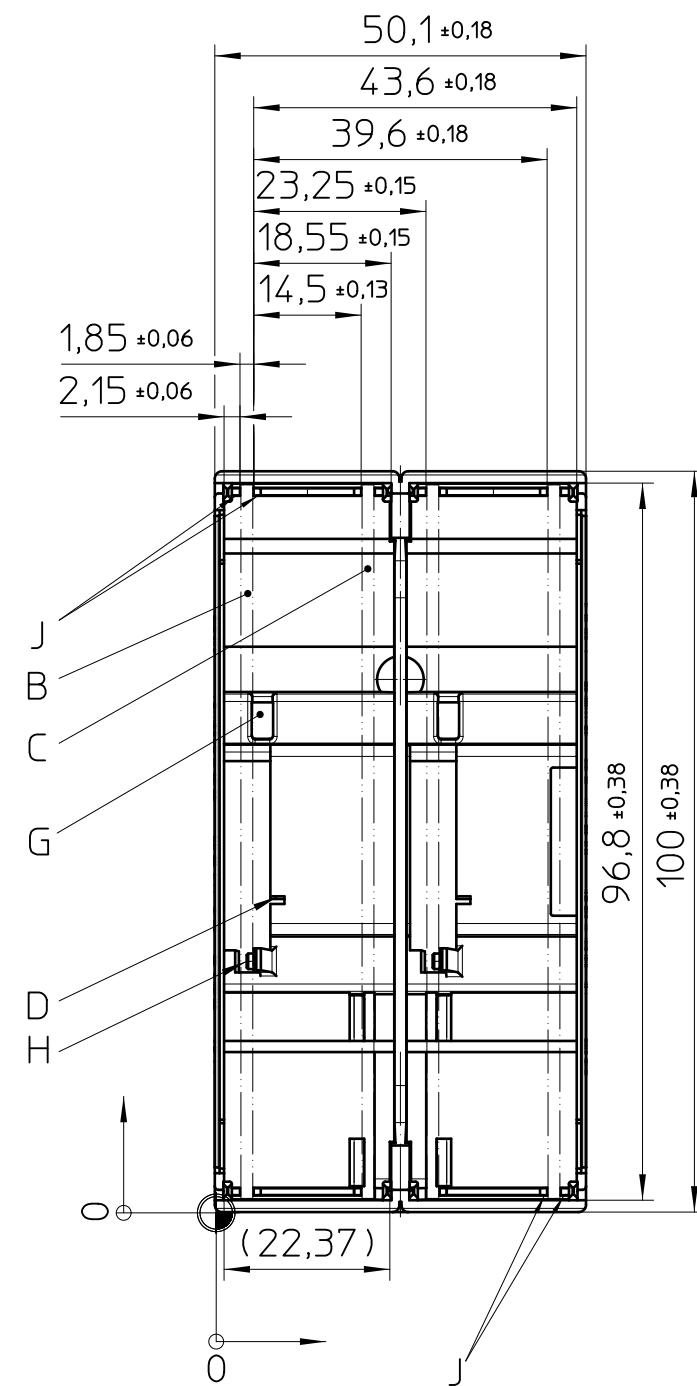


General Information:

- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
-  Workpiece zero point for mechanical processing
- Tolerances for printing DIN ISO 2768-m
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:

- A. Mounting rail like EN 60715, TH 35-7,5 or mounting rail similar EN 60715, TH 35-15x1,5
- B. Main PCB $t=1,6\pm0,2$
- C. Second PCB $t=1,6\pm0,2$
- D. Guidance slot for TBUS8 . . .
- E. Opening for fixing ICS50-C100 . . . or ICS50-TL100 . . .
- F. Notch for locking release, by screw driver
- G. Opening for ICS-FE-CONTACT
- H. Fixing PCB
- I. Guidance for ICS25-F . . . or ICC25 . . .
- J. PCB guidance
- K. Marking area left
- L. Marking area right

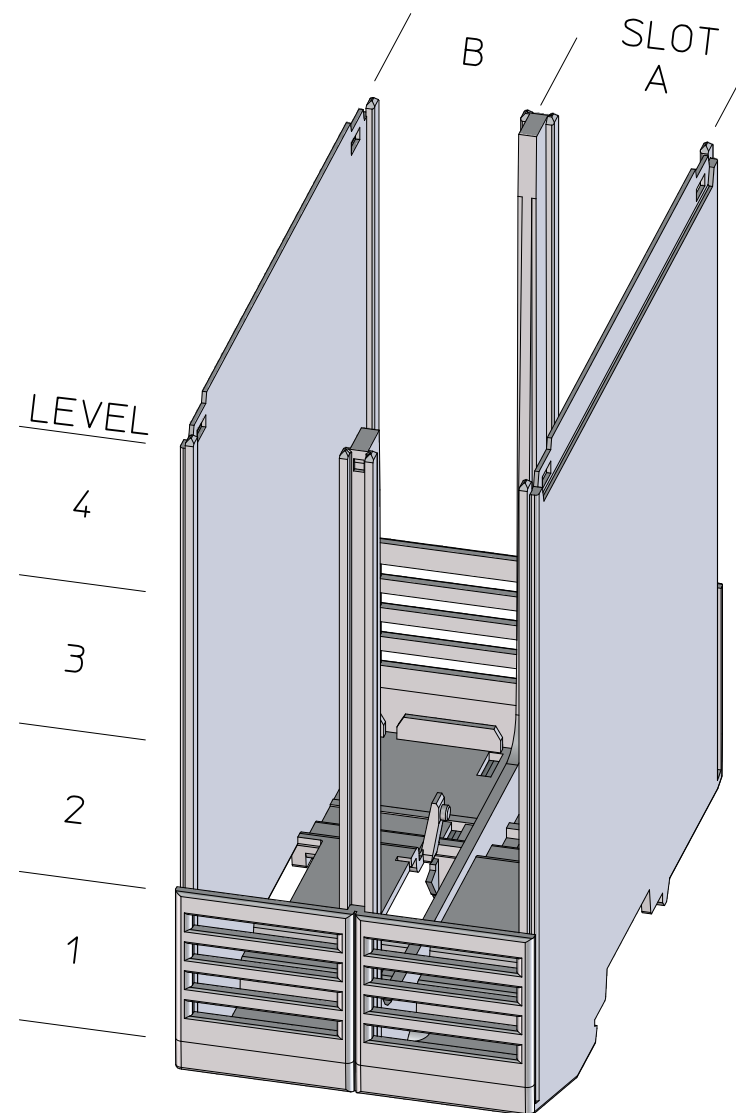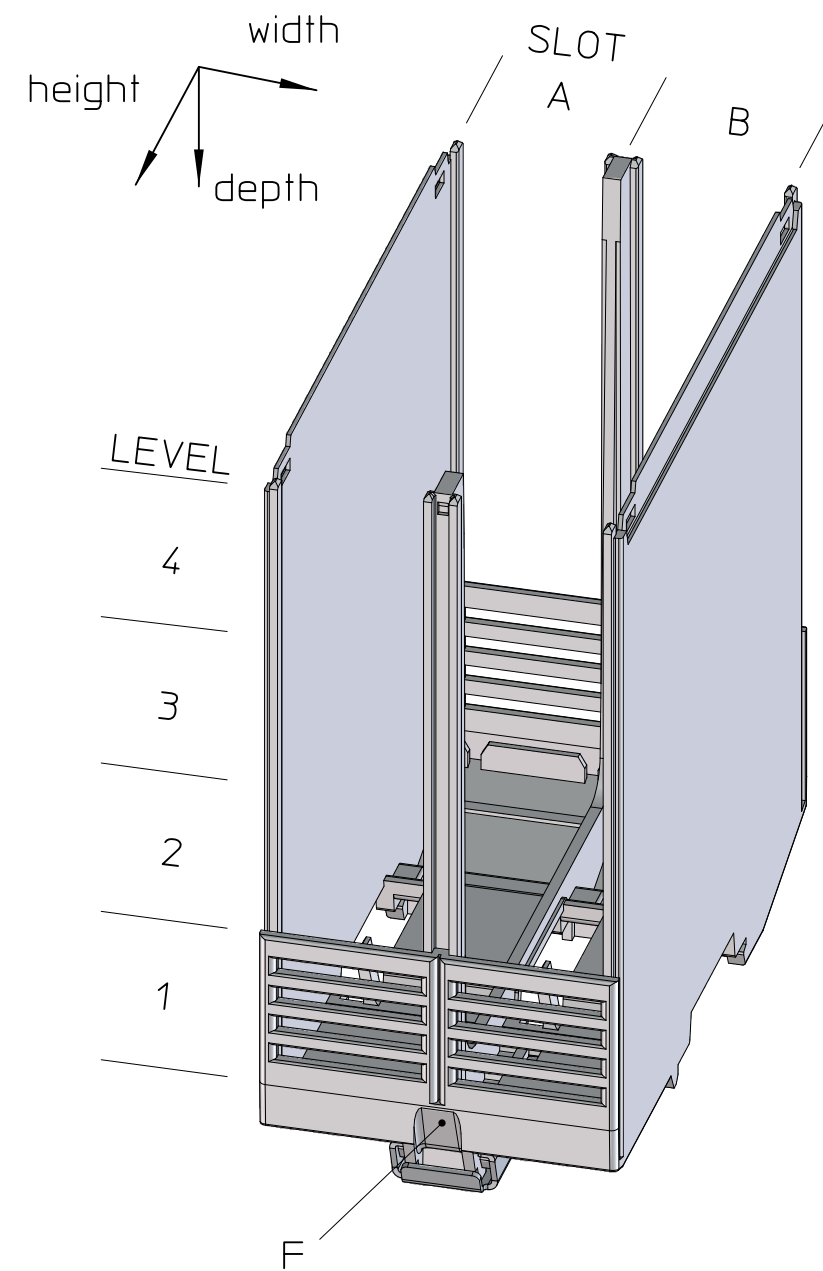

Pos.	QTY	Description	Material
1	1	BOTTOM PART	PA
2	1	FOOT CATCH	STL
3	1	SPRING	STL