
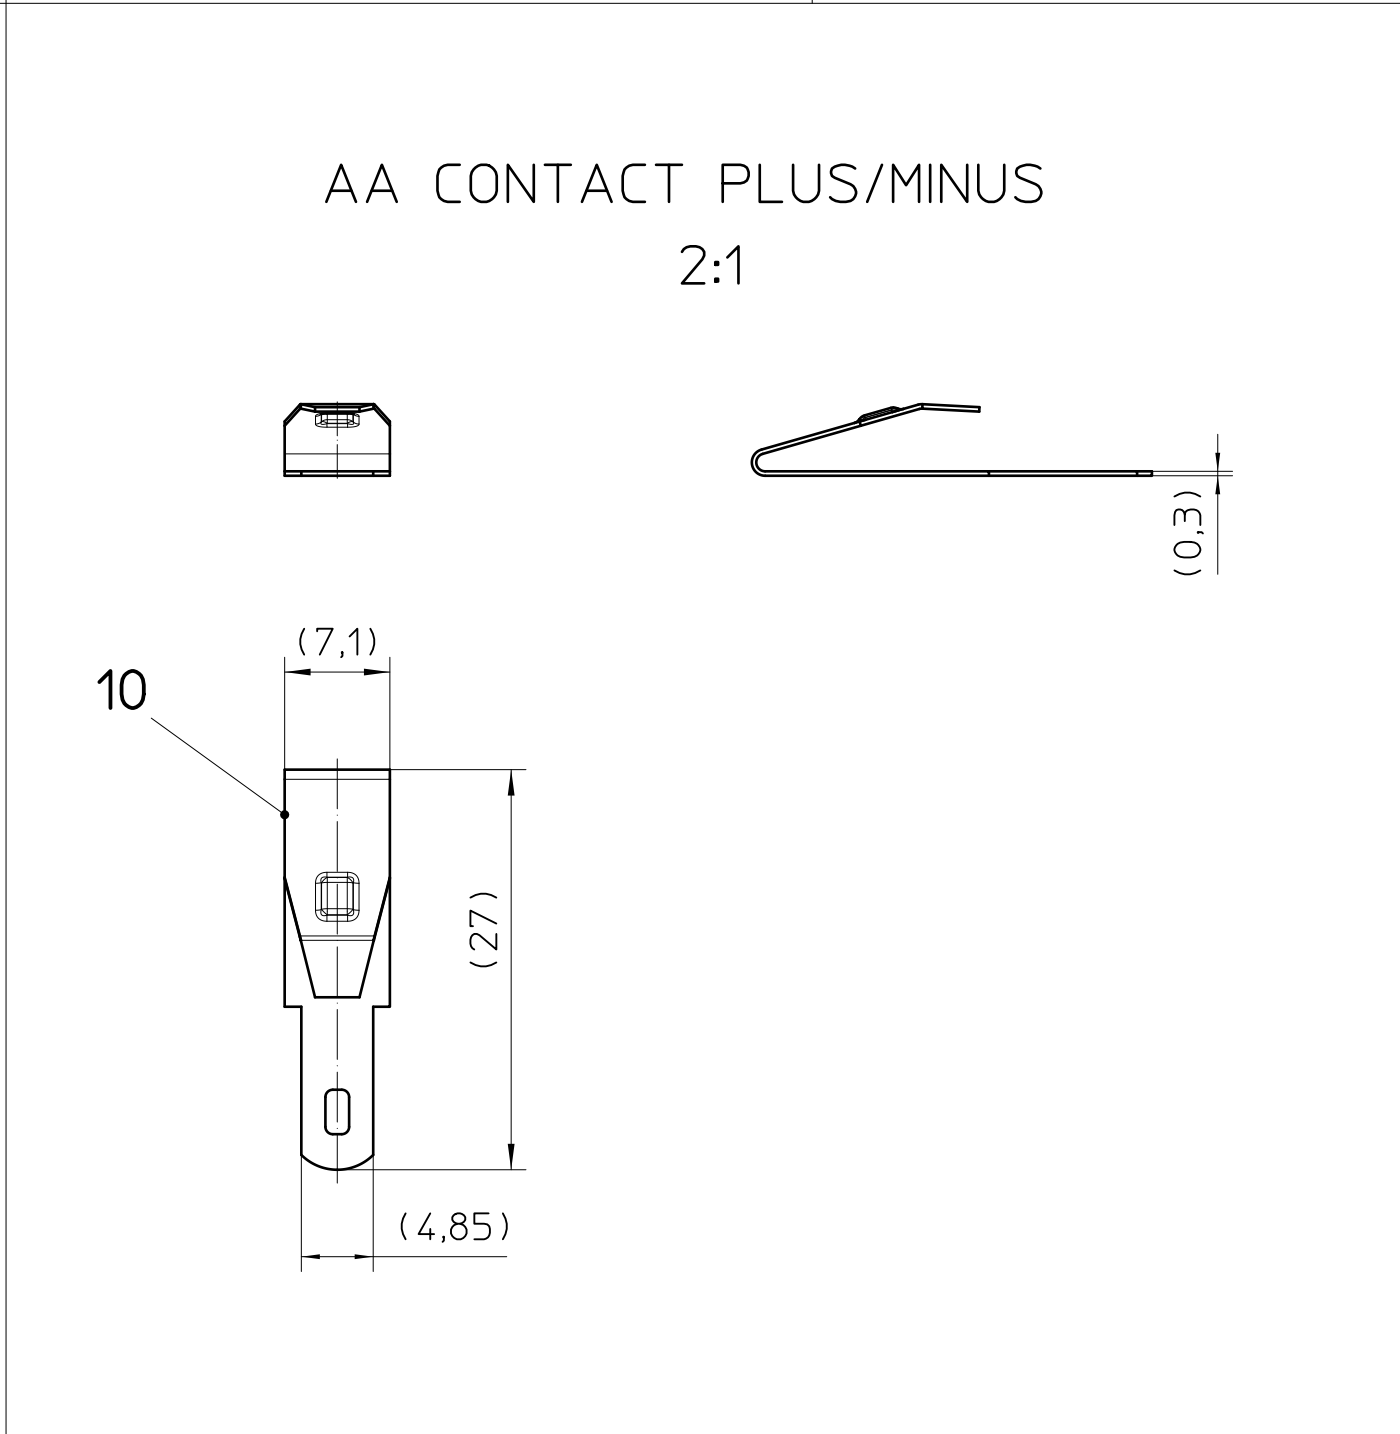
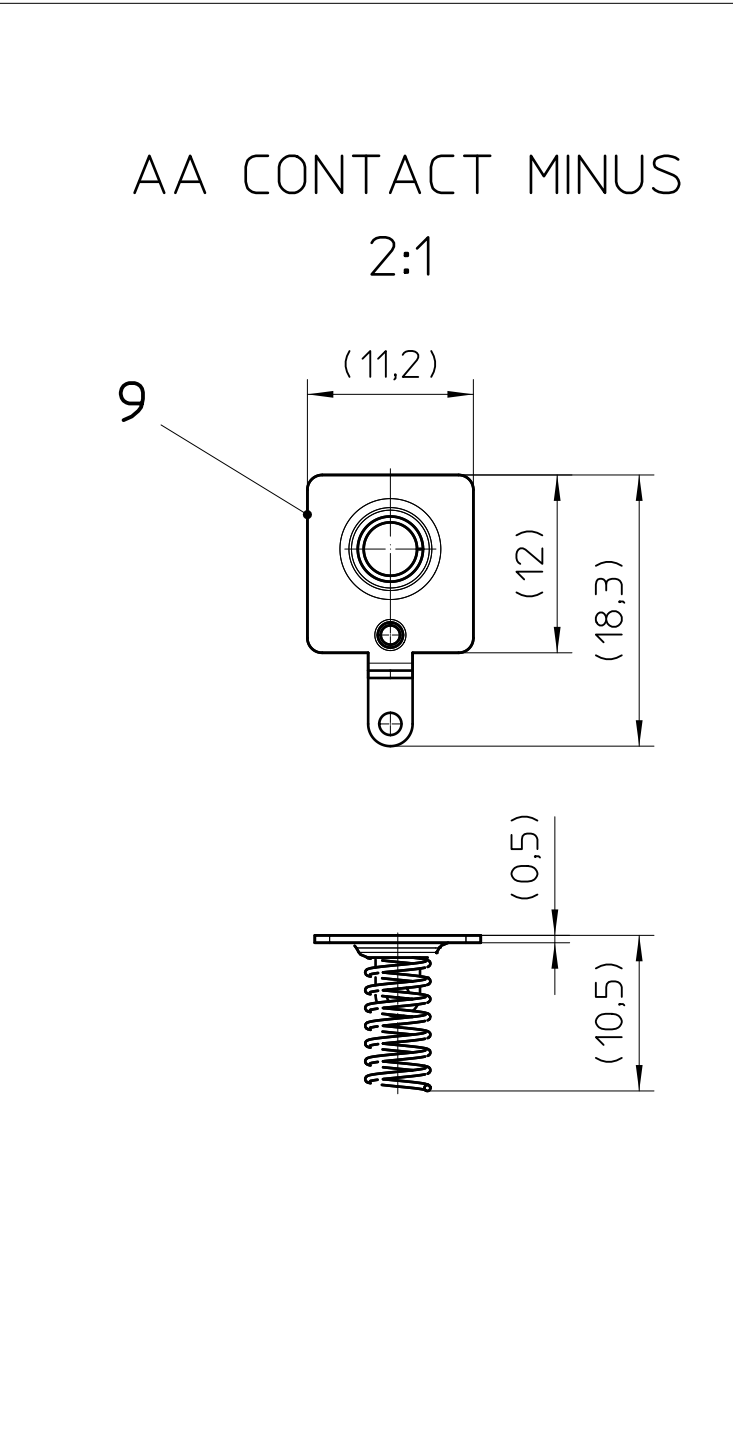
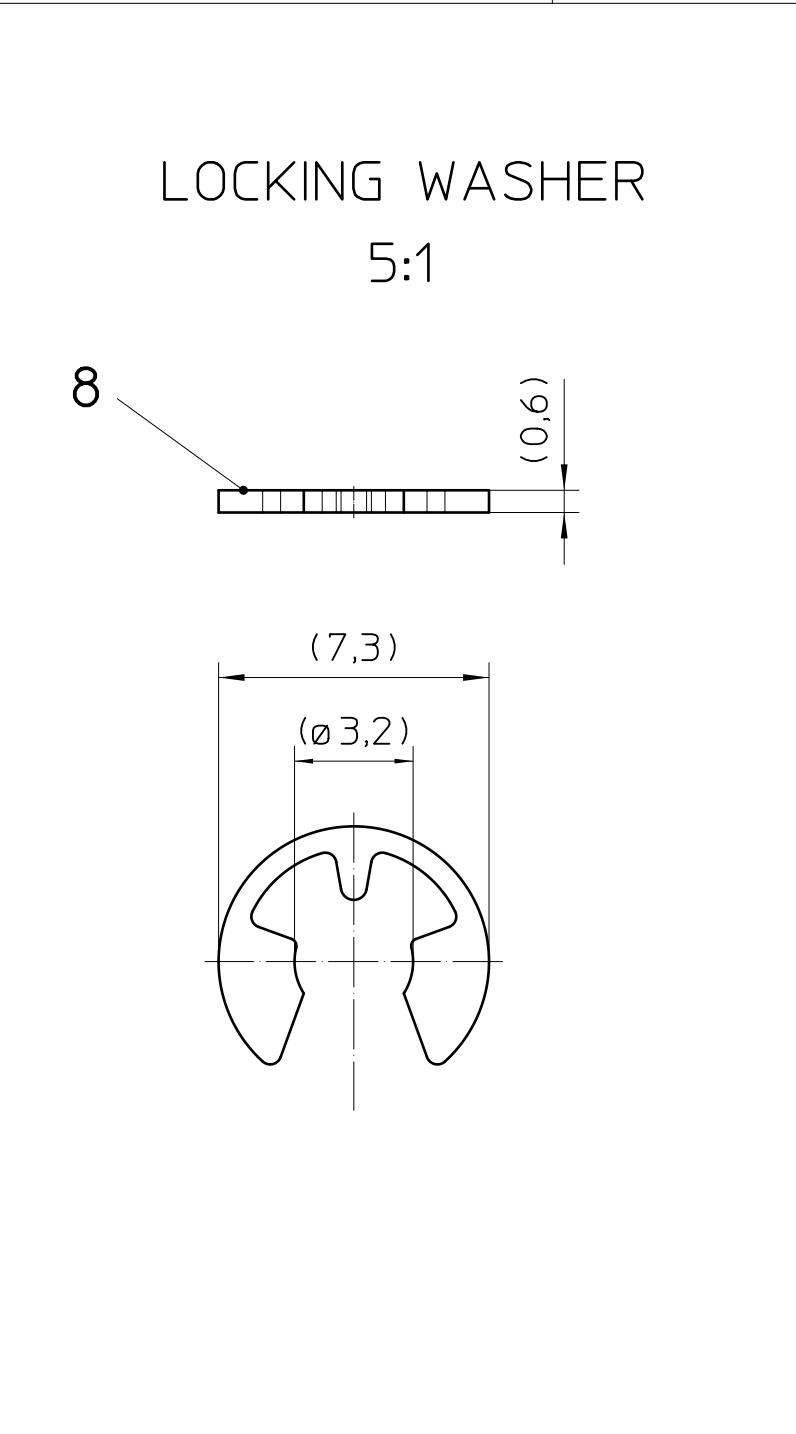
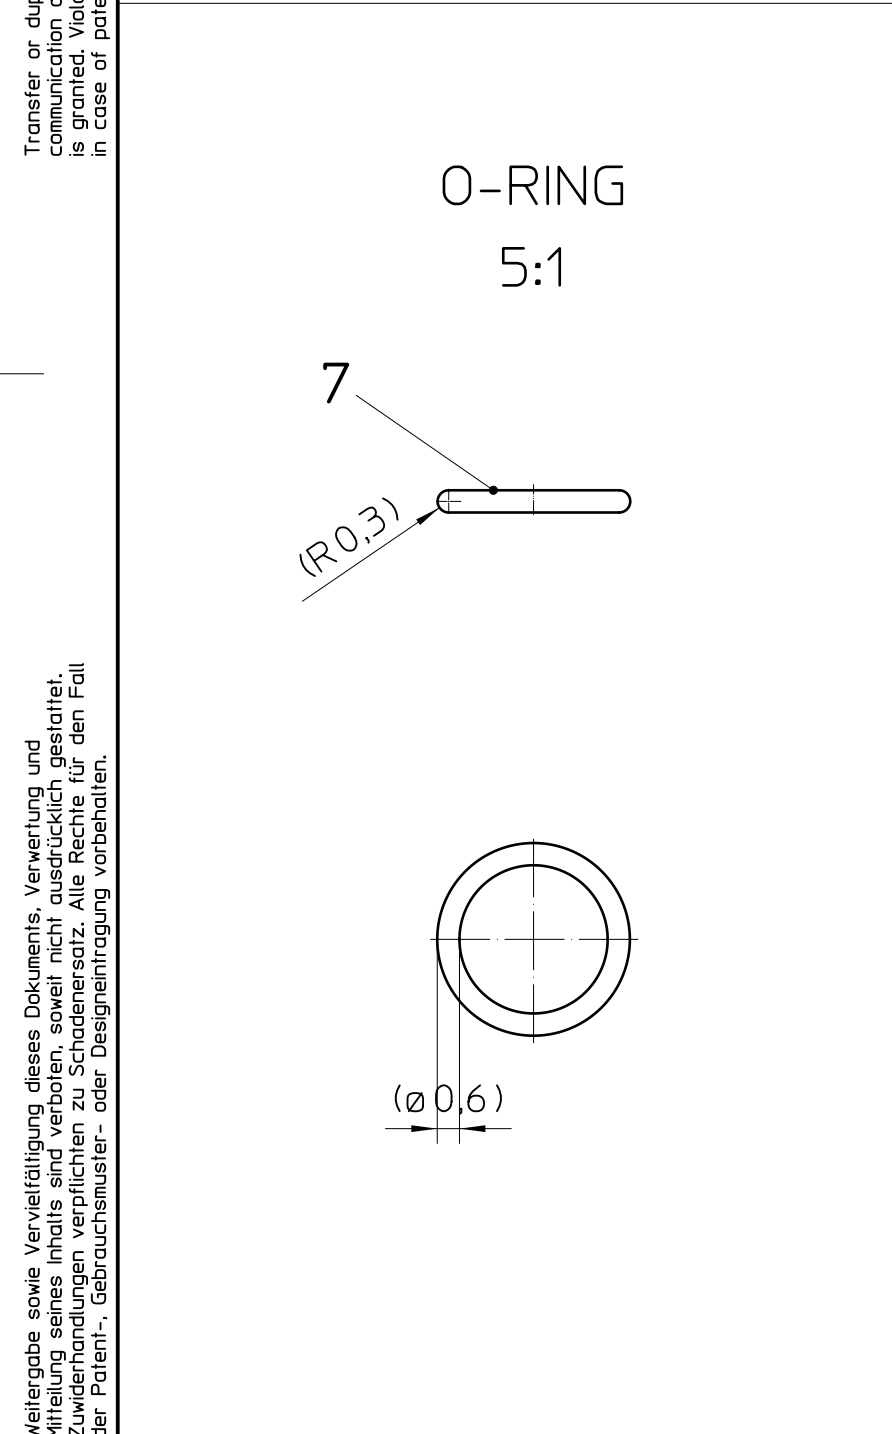
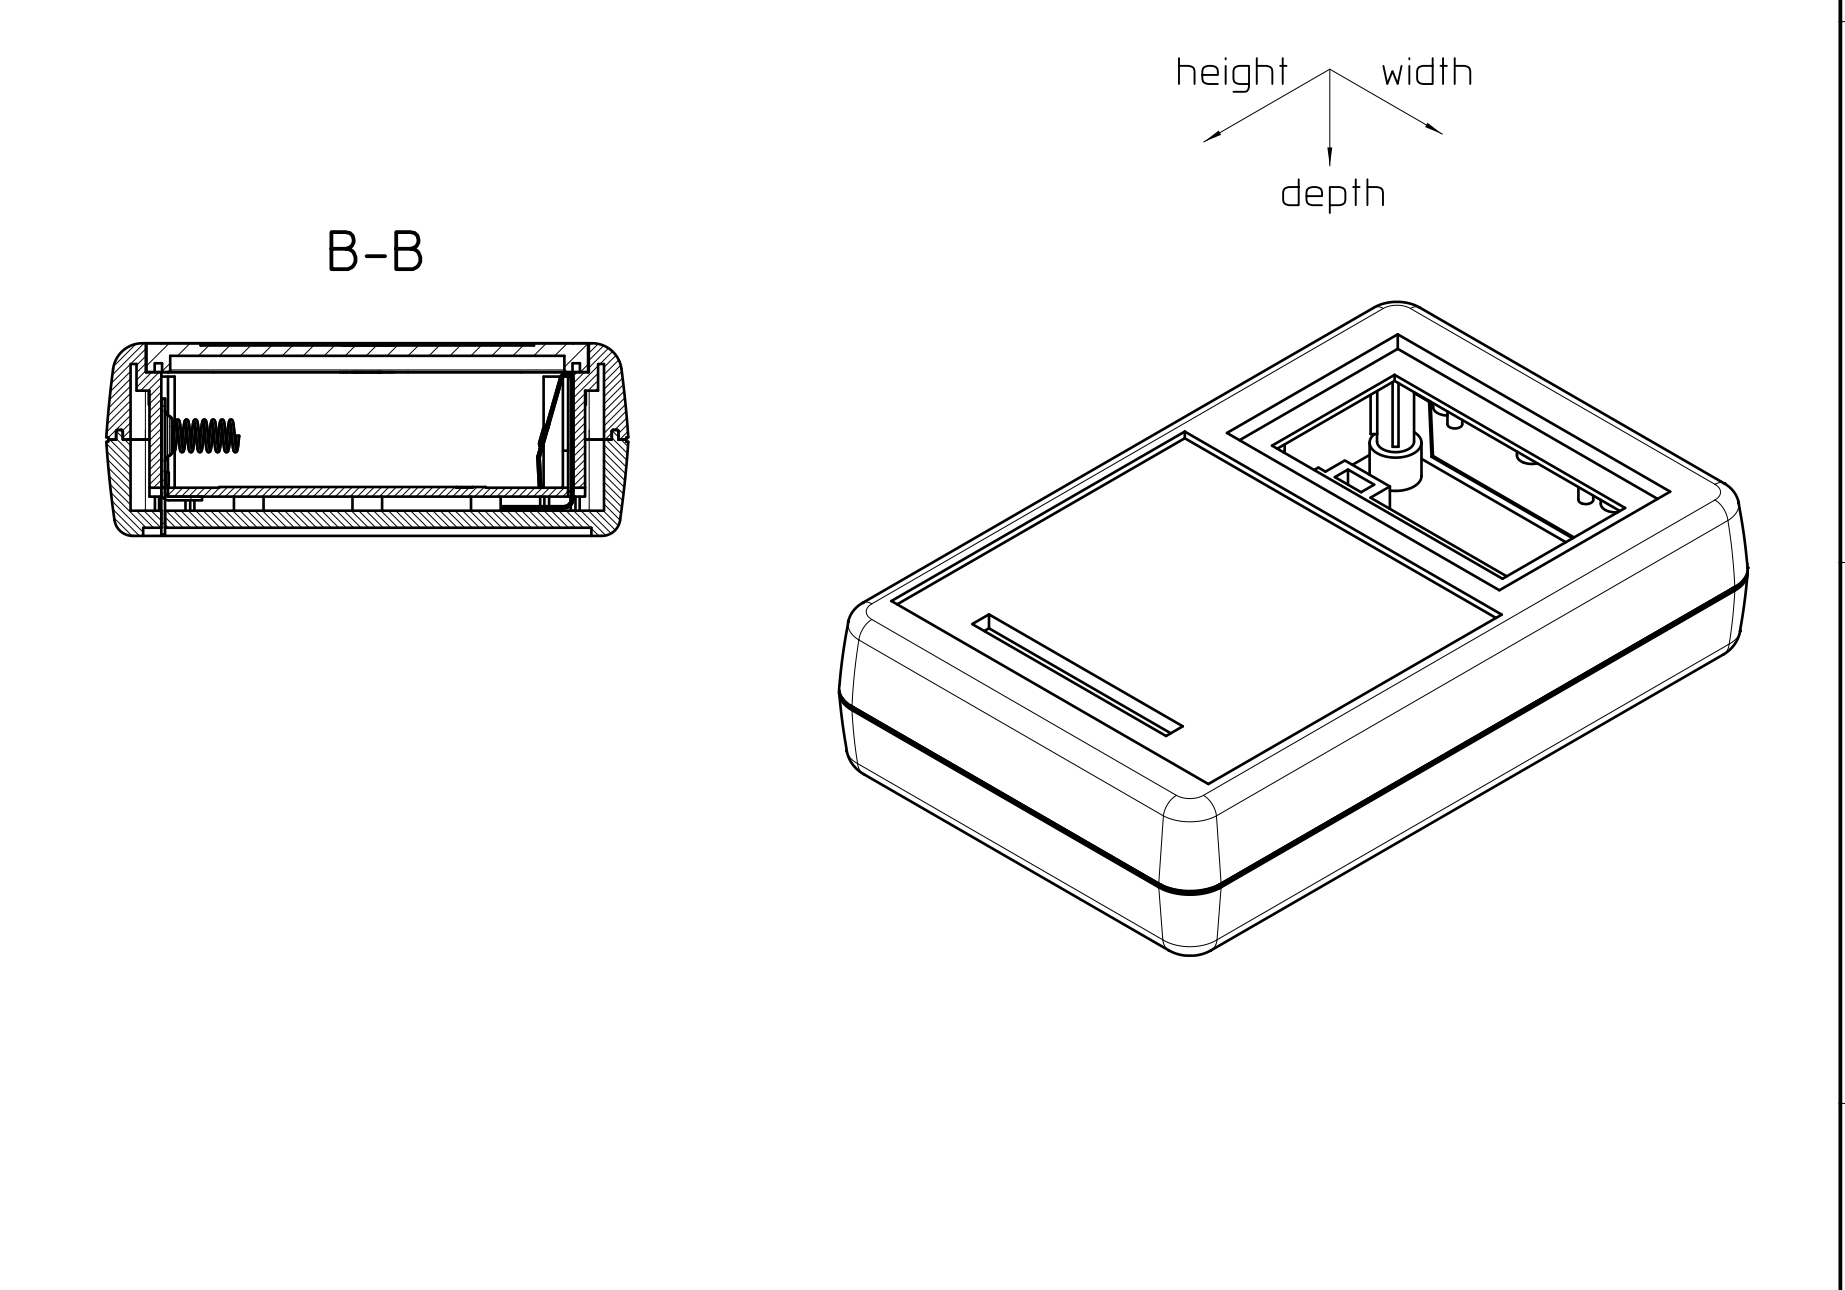
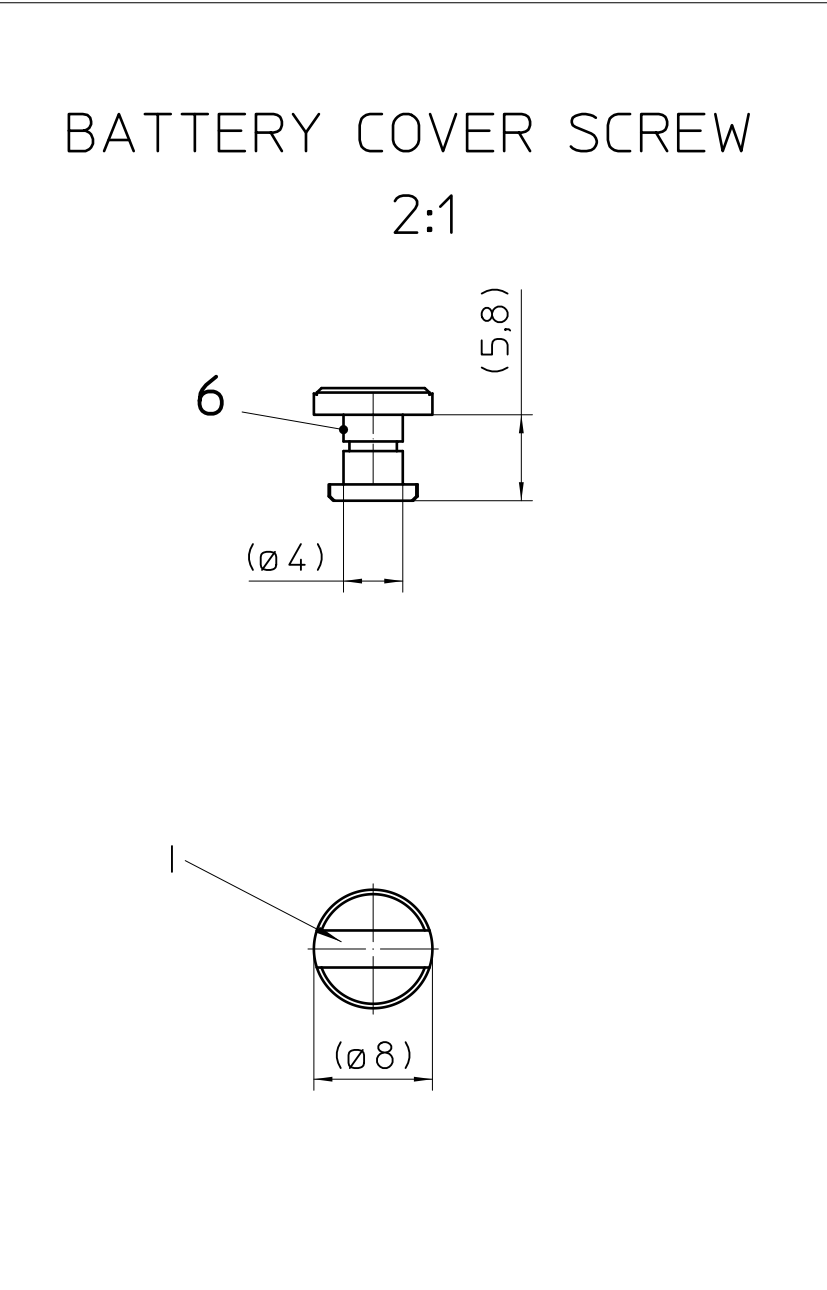
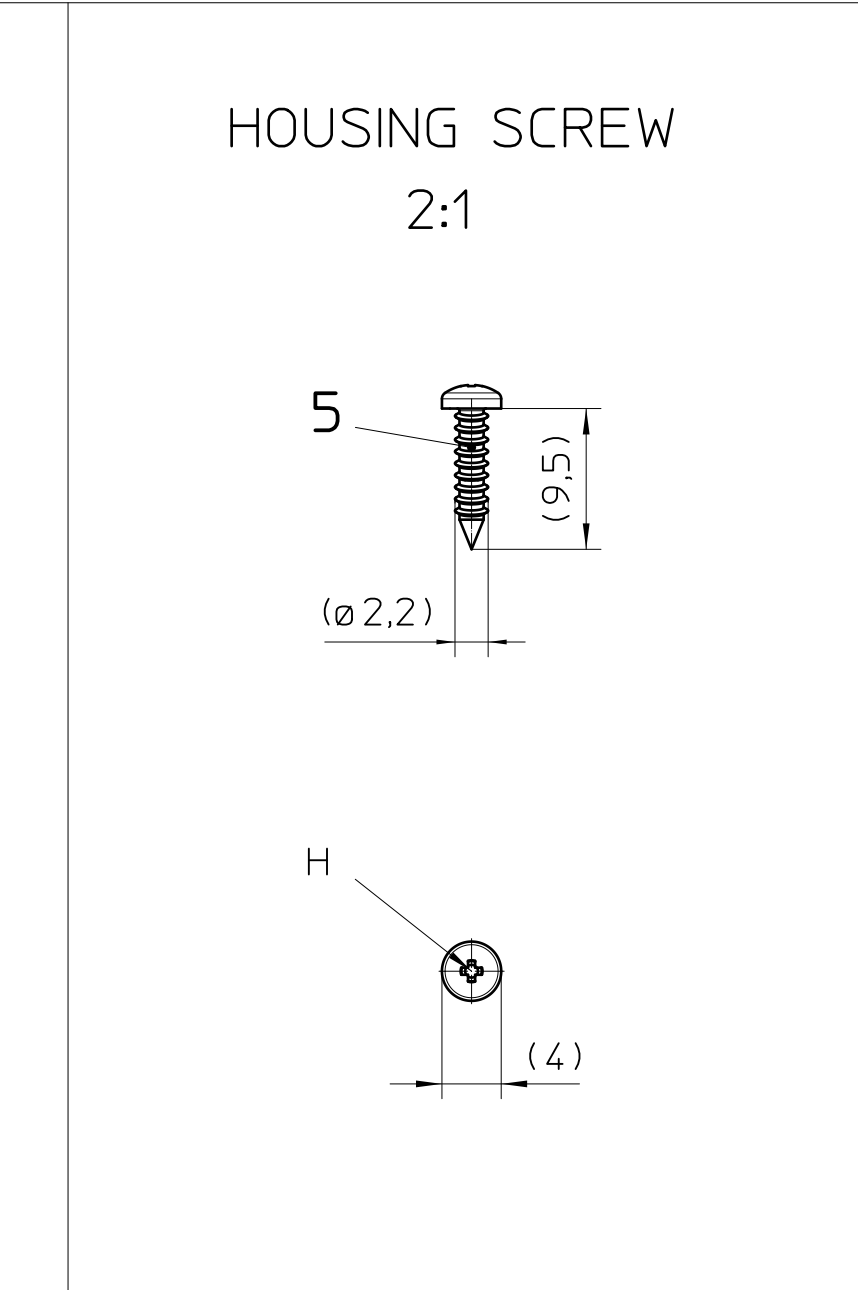
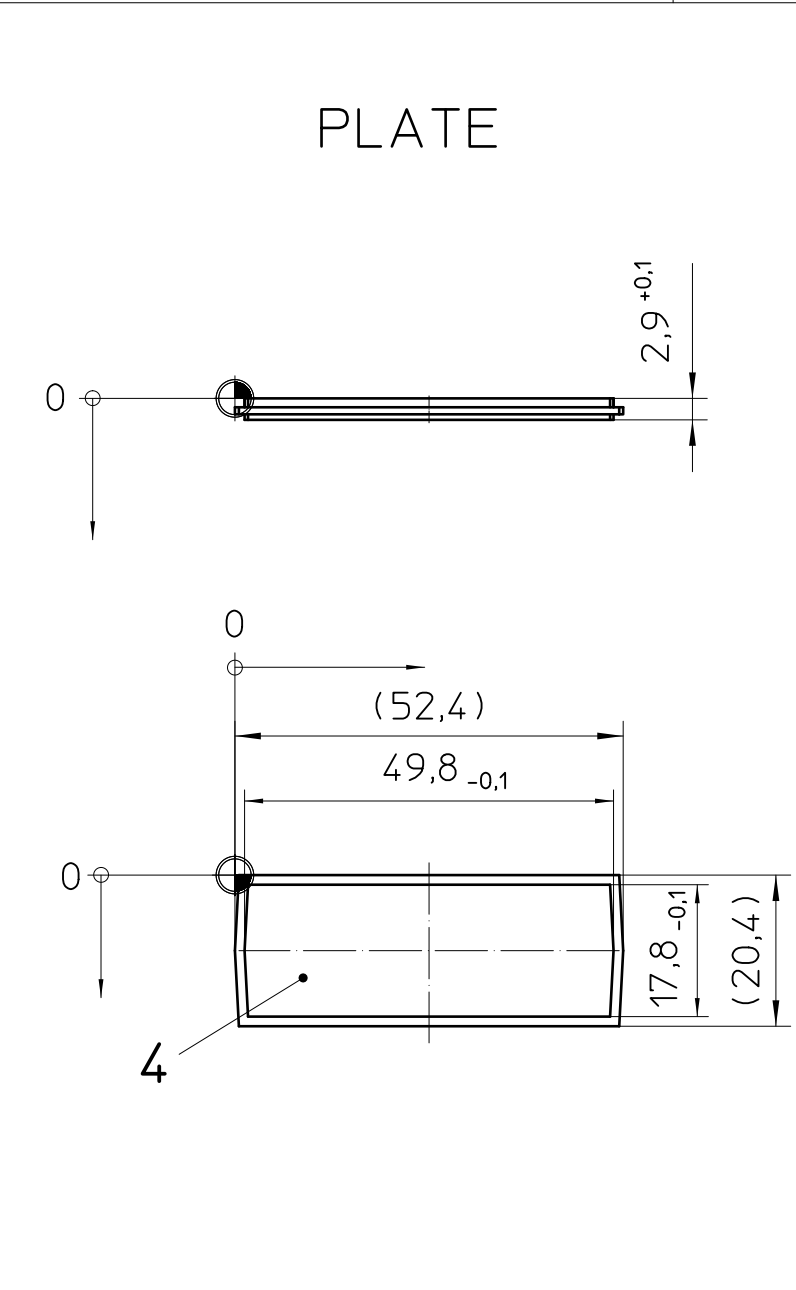
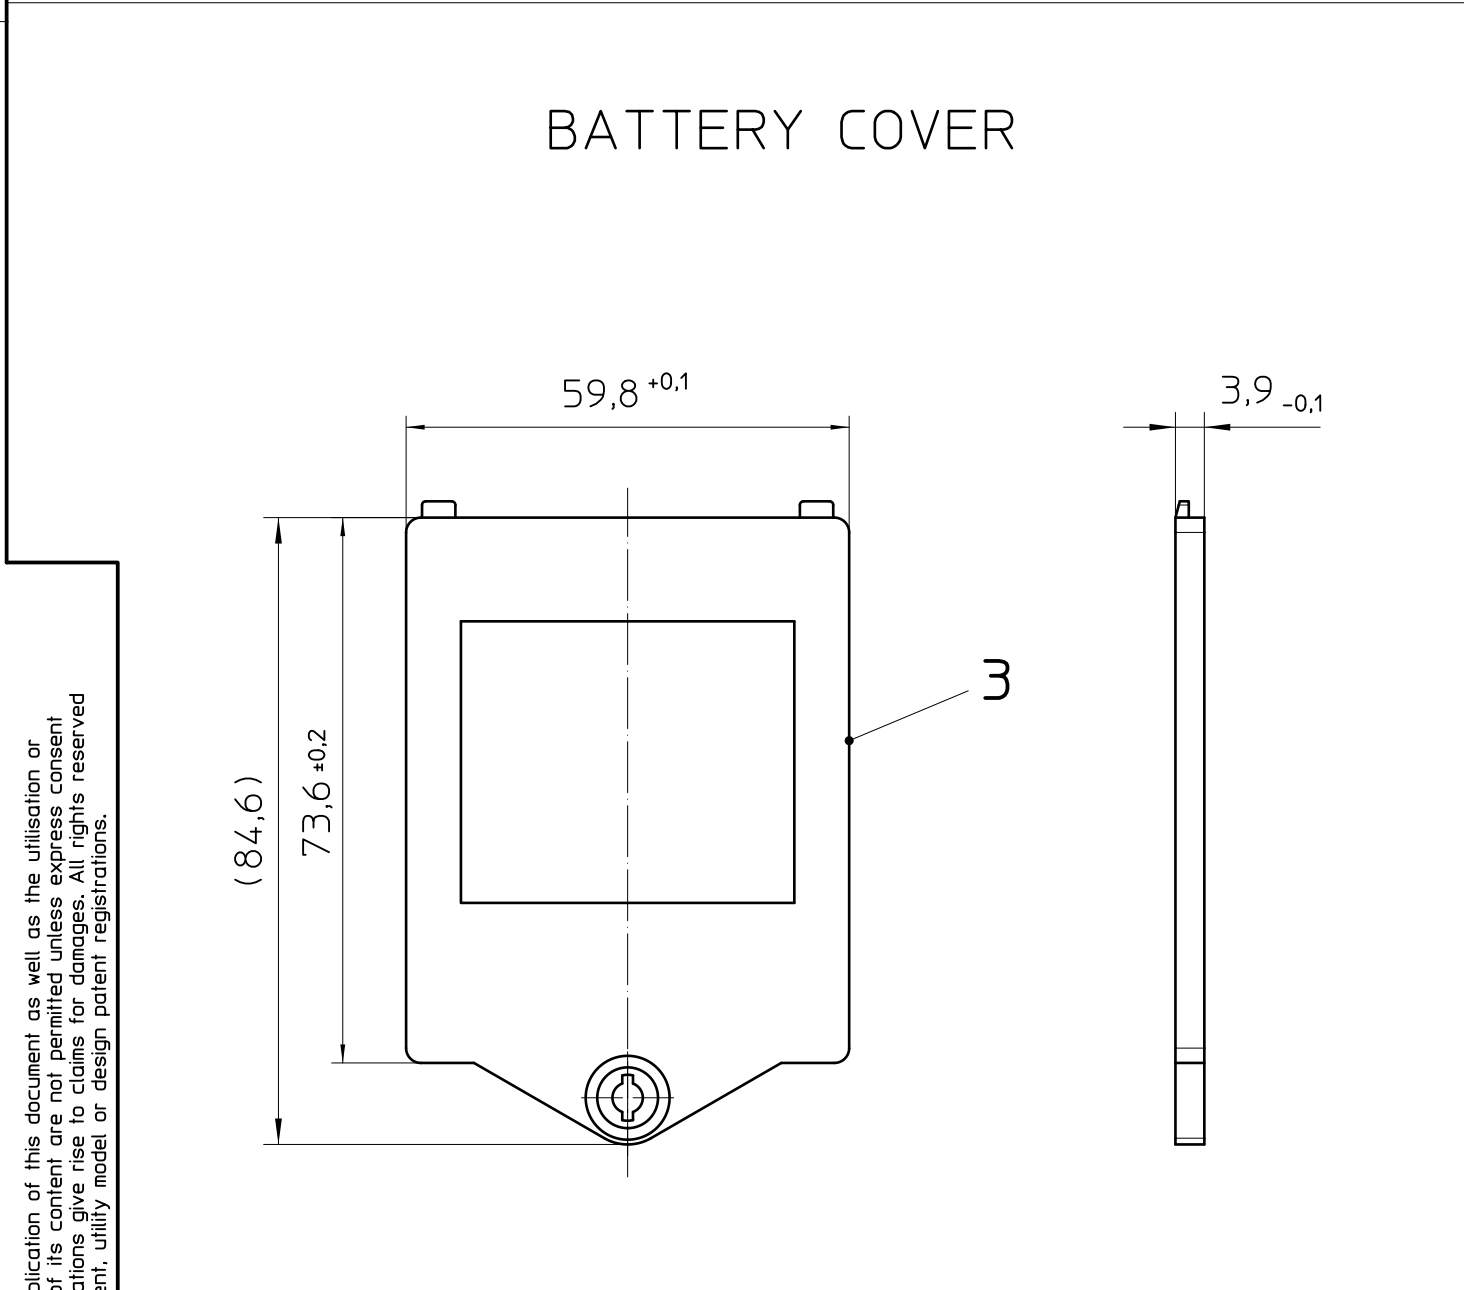
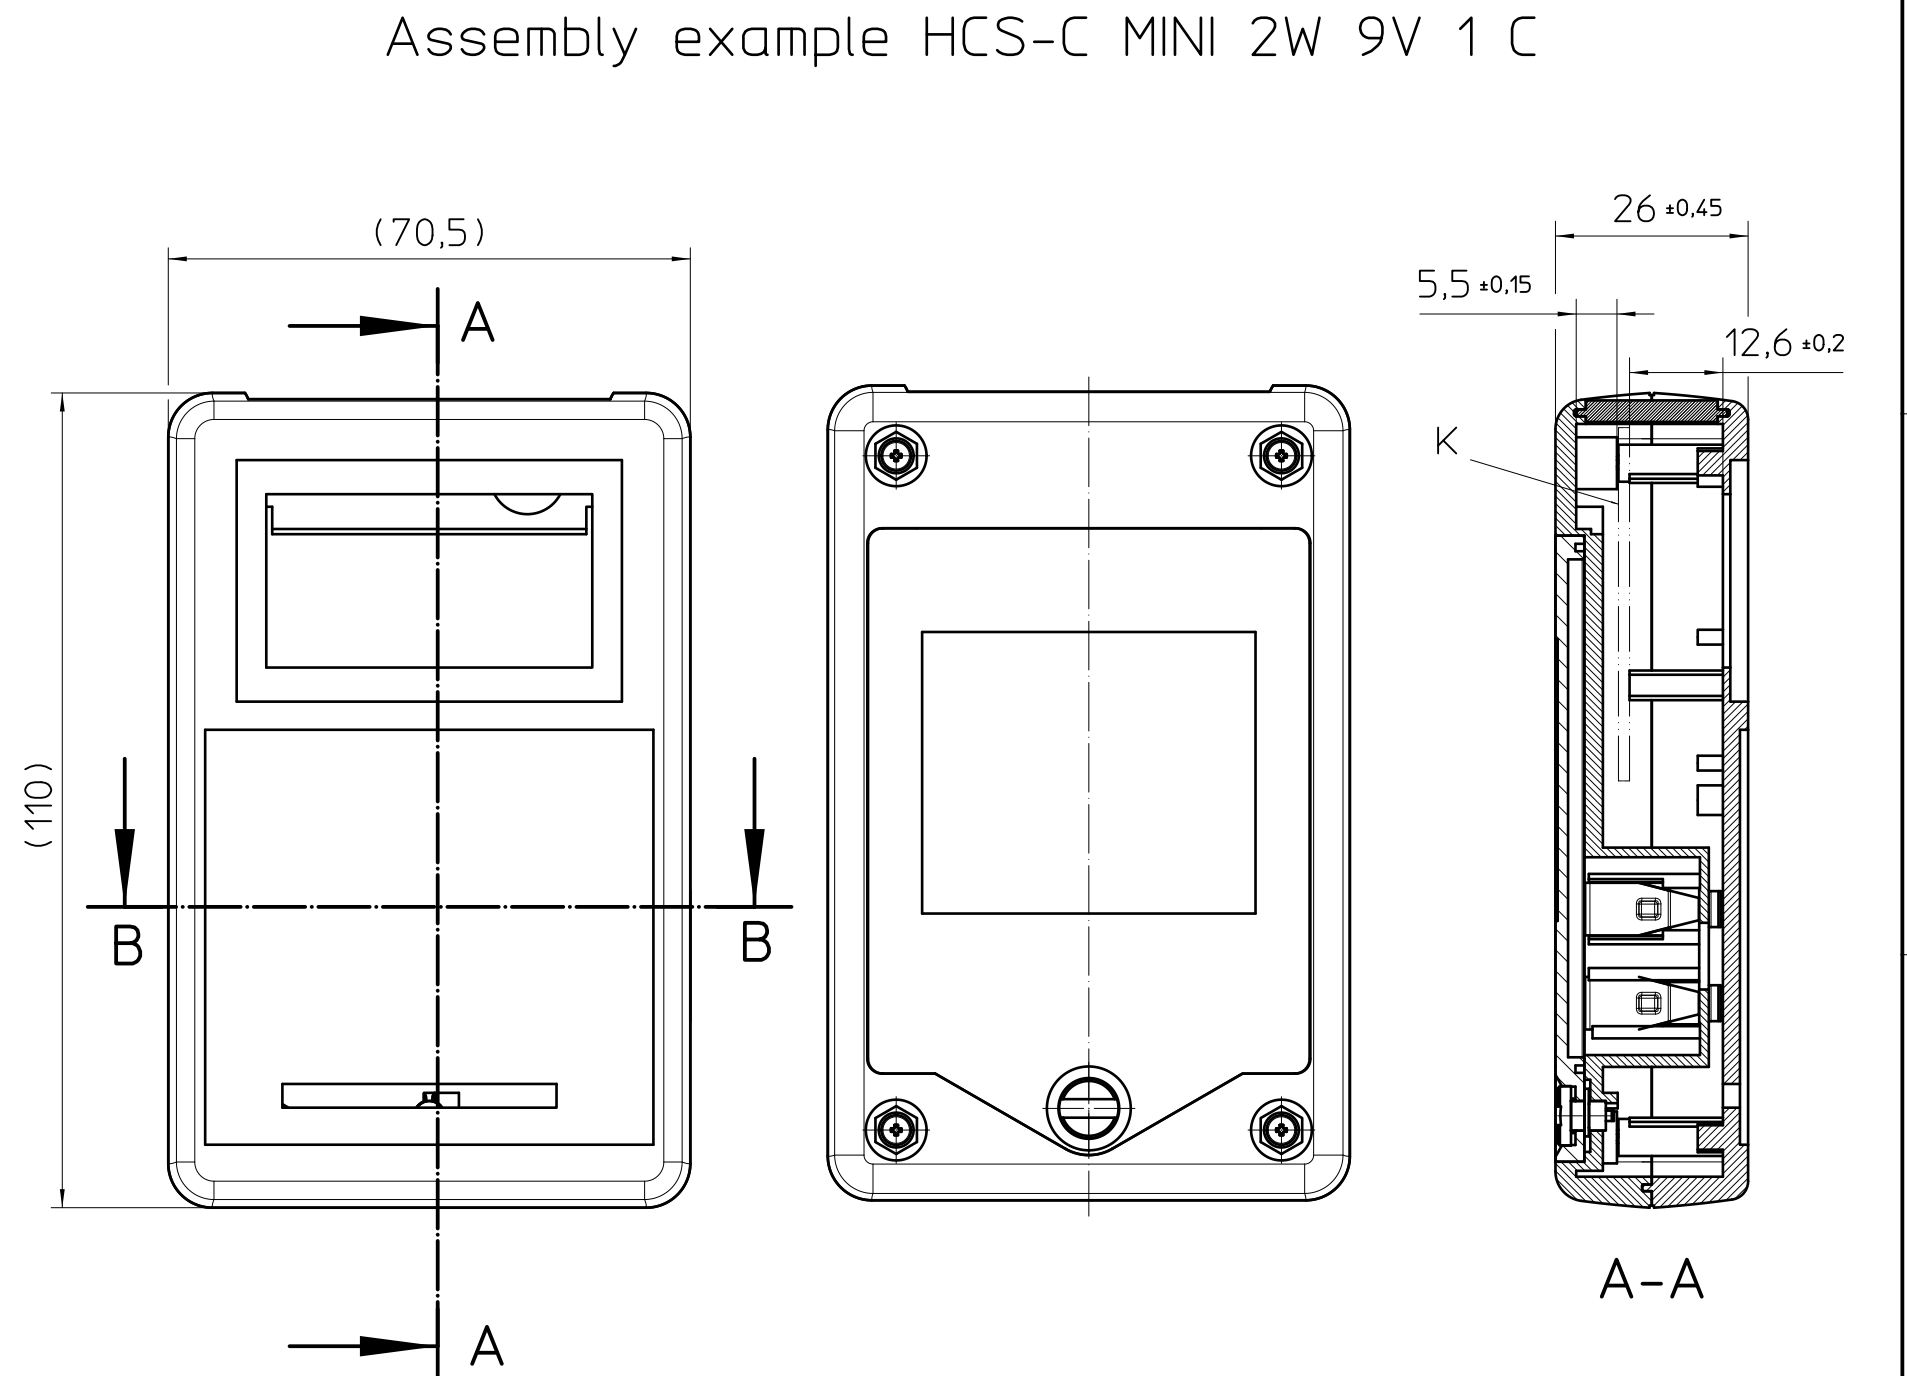
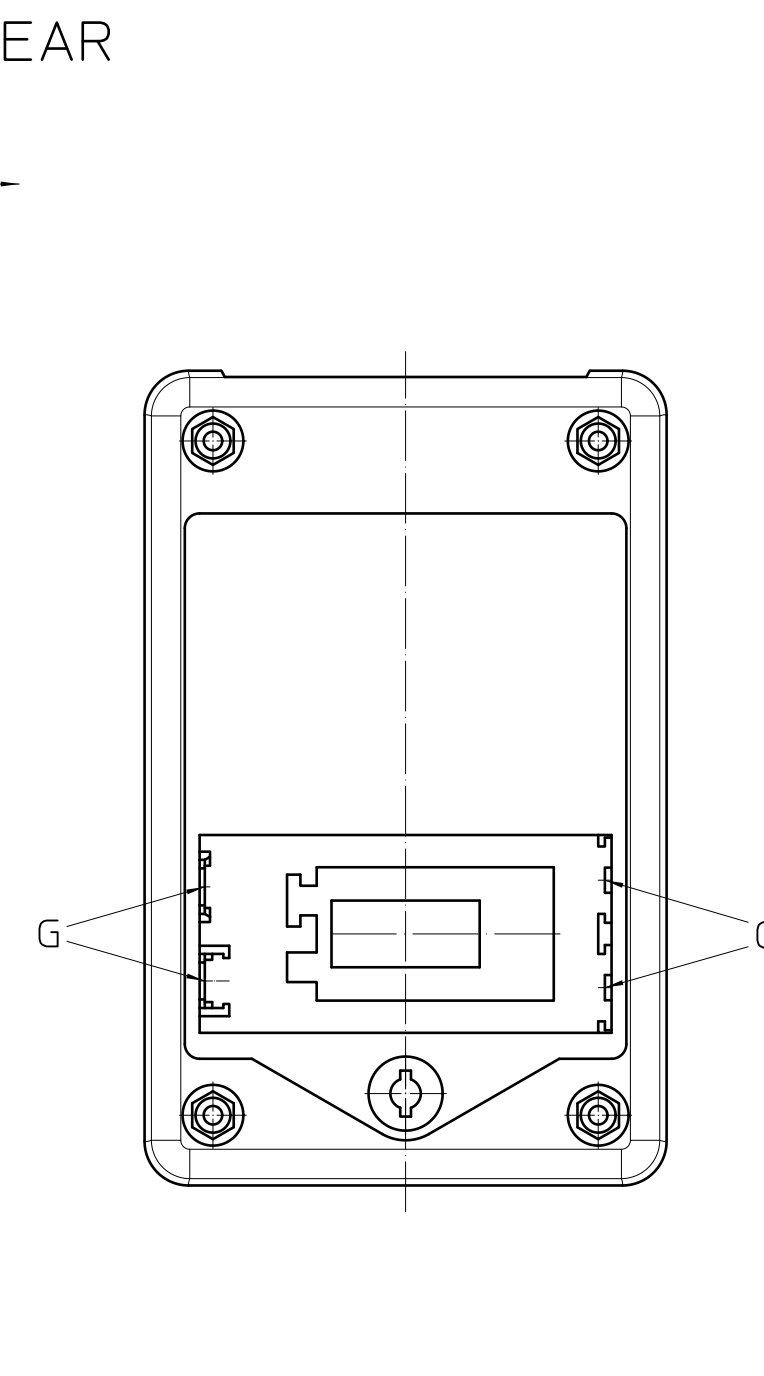
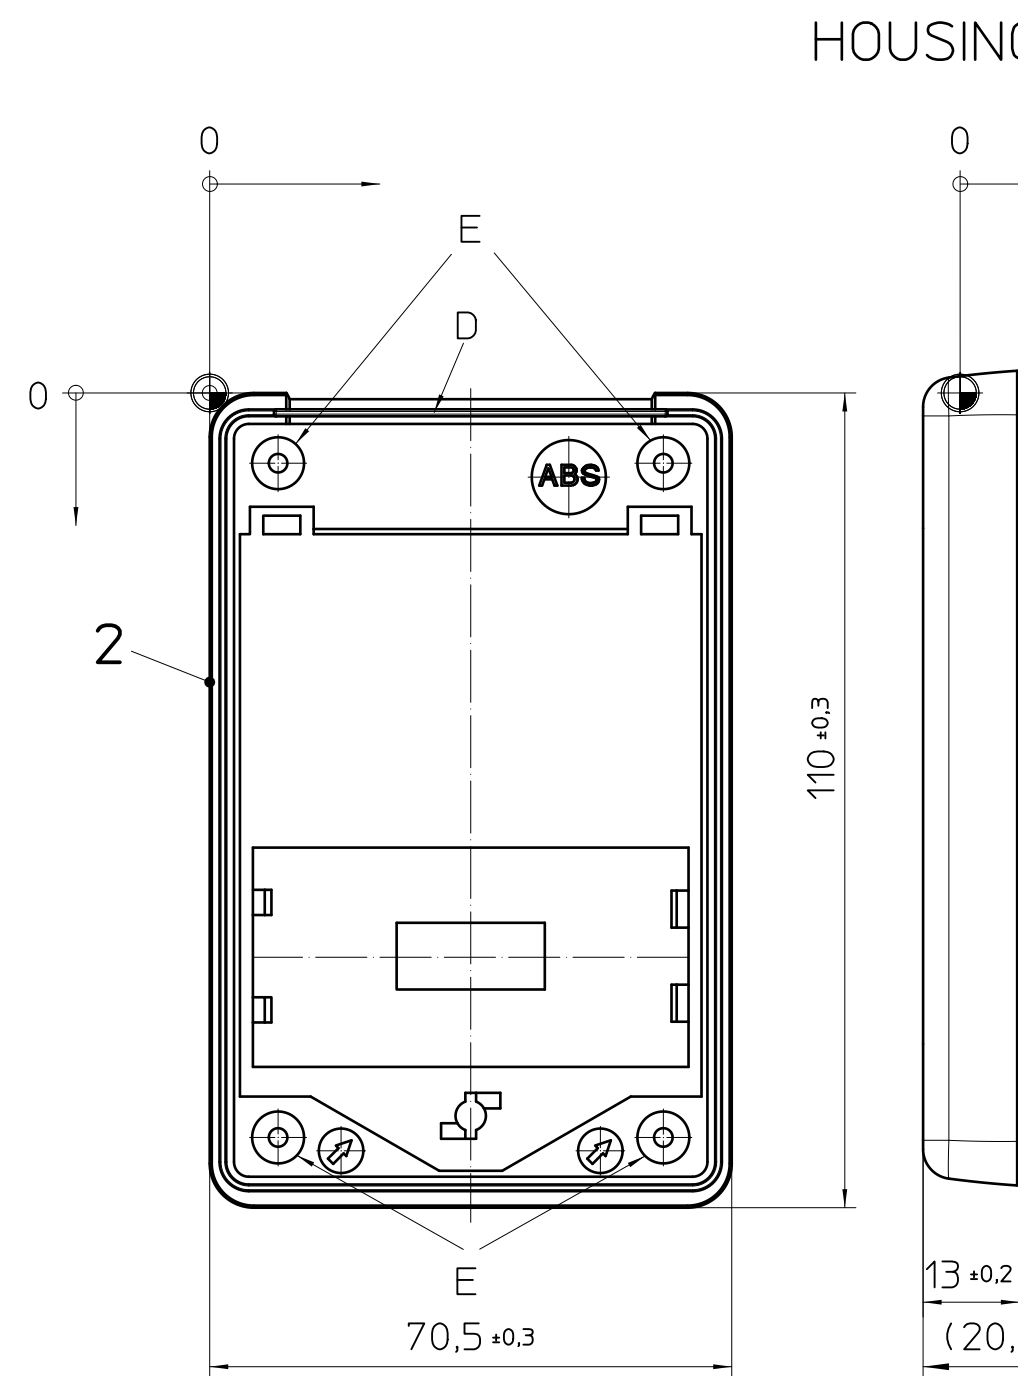
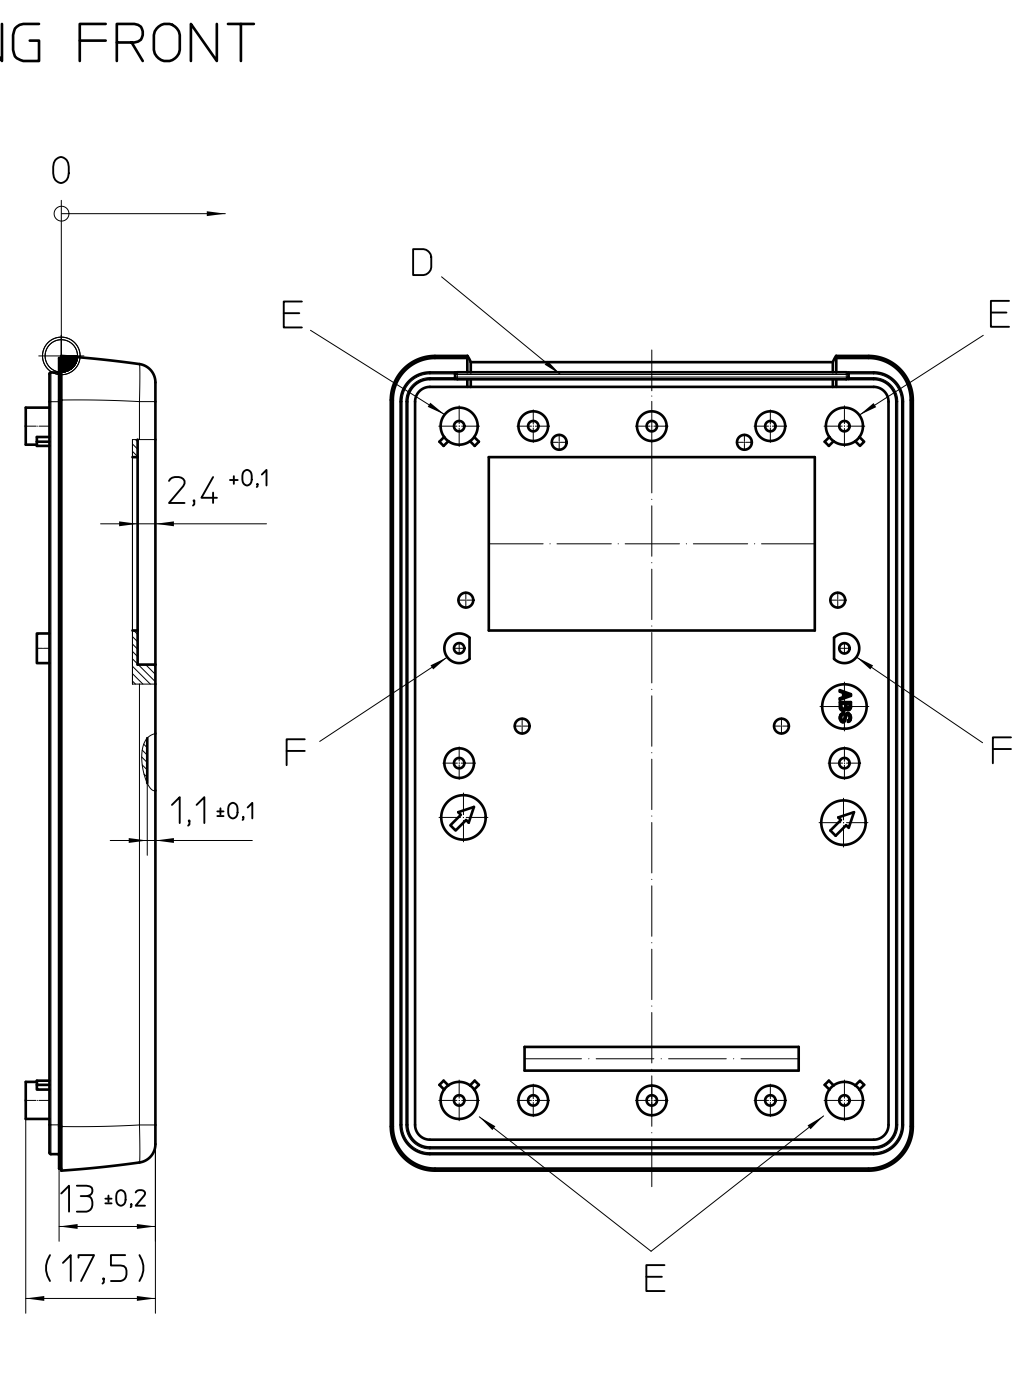


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent has been obtained from Phoenix Contact. All rights are reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

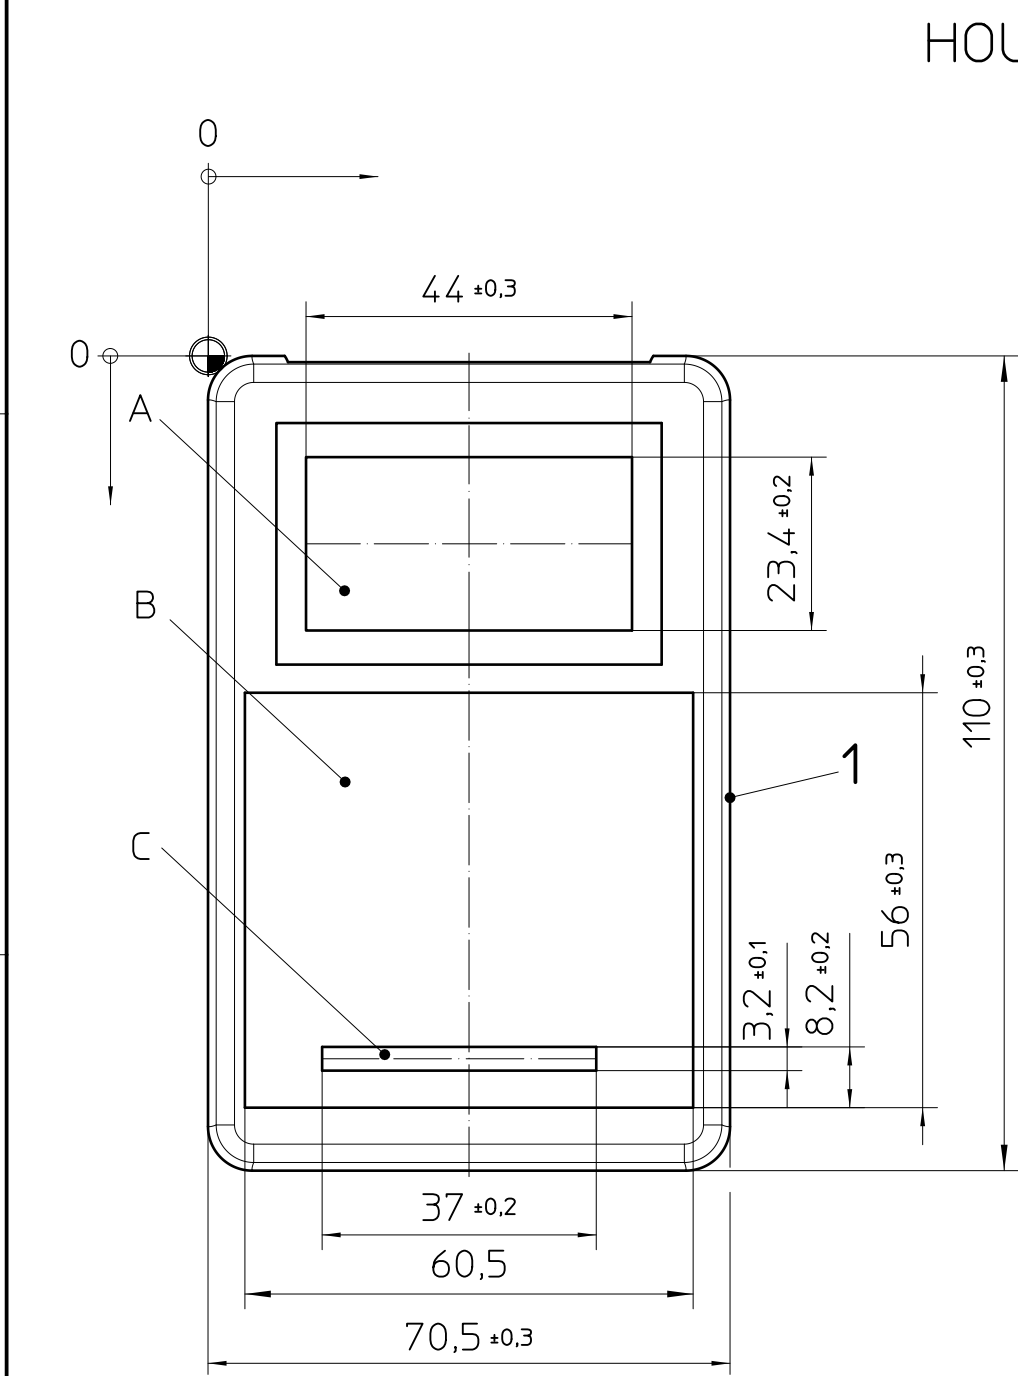

KIT

Pos.	QTY	Description
1	1	HOUSING FRONT (ABS)
2	1	HOUSING REAR (ABS)
3	1	BATTERY COVER (ABS)
4	1	PLATE (ABS)
5	4	SCREW ISO 7049-ST2.2X9.5-C-H
6	1	BATTERY COVER SCREW
7	1	O-RING DIN ISO 3601
8	1	LOCKING WASHER DIN 6799
9	2	AA CONTACT MINUS
10	2	AA CONTACT PLUS/MINUS

- General Information:
- Simplified representation
 - Document excluded from change process
 - Linear dimensions [mm]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
 - Further information: www.phoenixcontact.com
 - webcode: #0855

- Additional Information:
- Minimum radii for mechanical processing R=1.2

⊕ = workpiece zero point for mechanical processing

- A. Cut-out for display
B. Area for keypad
C. Cut-out for keypad
D. Cut-out for plate
E. Screw domes for housing screws
F. Additional attachment point for main PCB with self tapping screws Ø1.8x10 (screws not included)
G. Guide for AA-contacts
H. Phillips recessed head PH 1
I. Slot for screwdriver 1.0x6.5
K. PCB main BC position (t=1.5)

DIN A1	document-No. / Ri	date	scale
01205154 / 01	1108138	29.05.2024	1:1
document-type	description		
TECDOC 2D_Productdrawing	HCS-C MINI 2W 9V 1 C 7035		
page 1	of 1		