

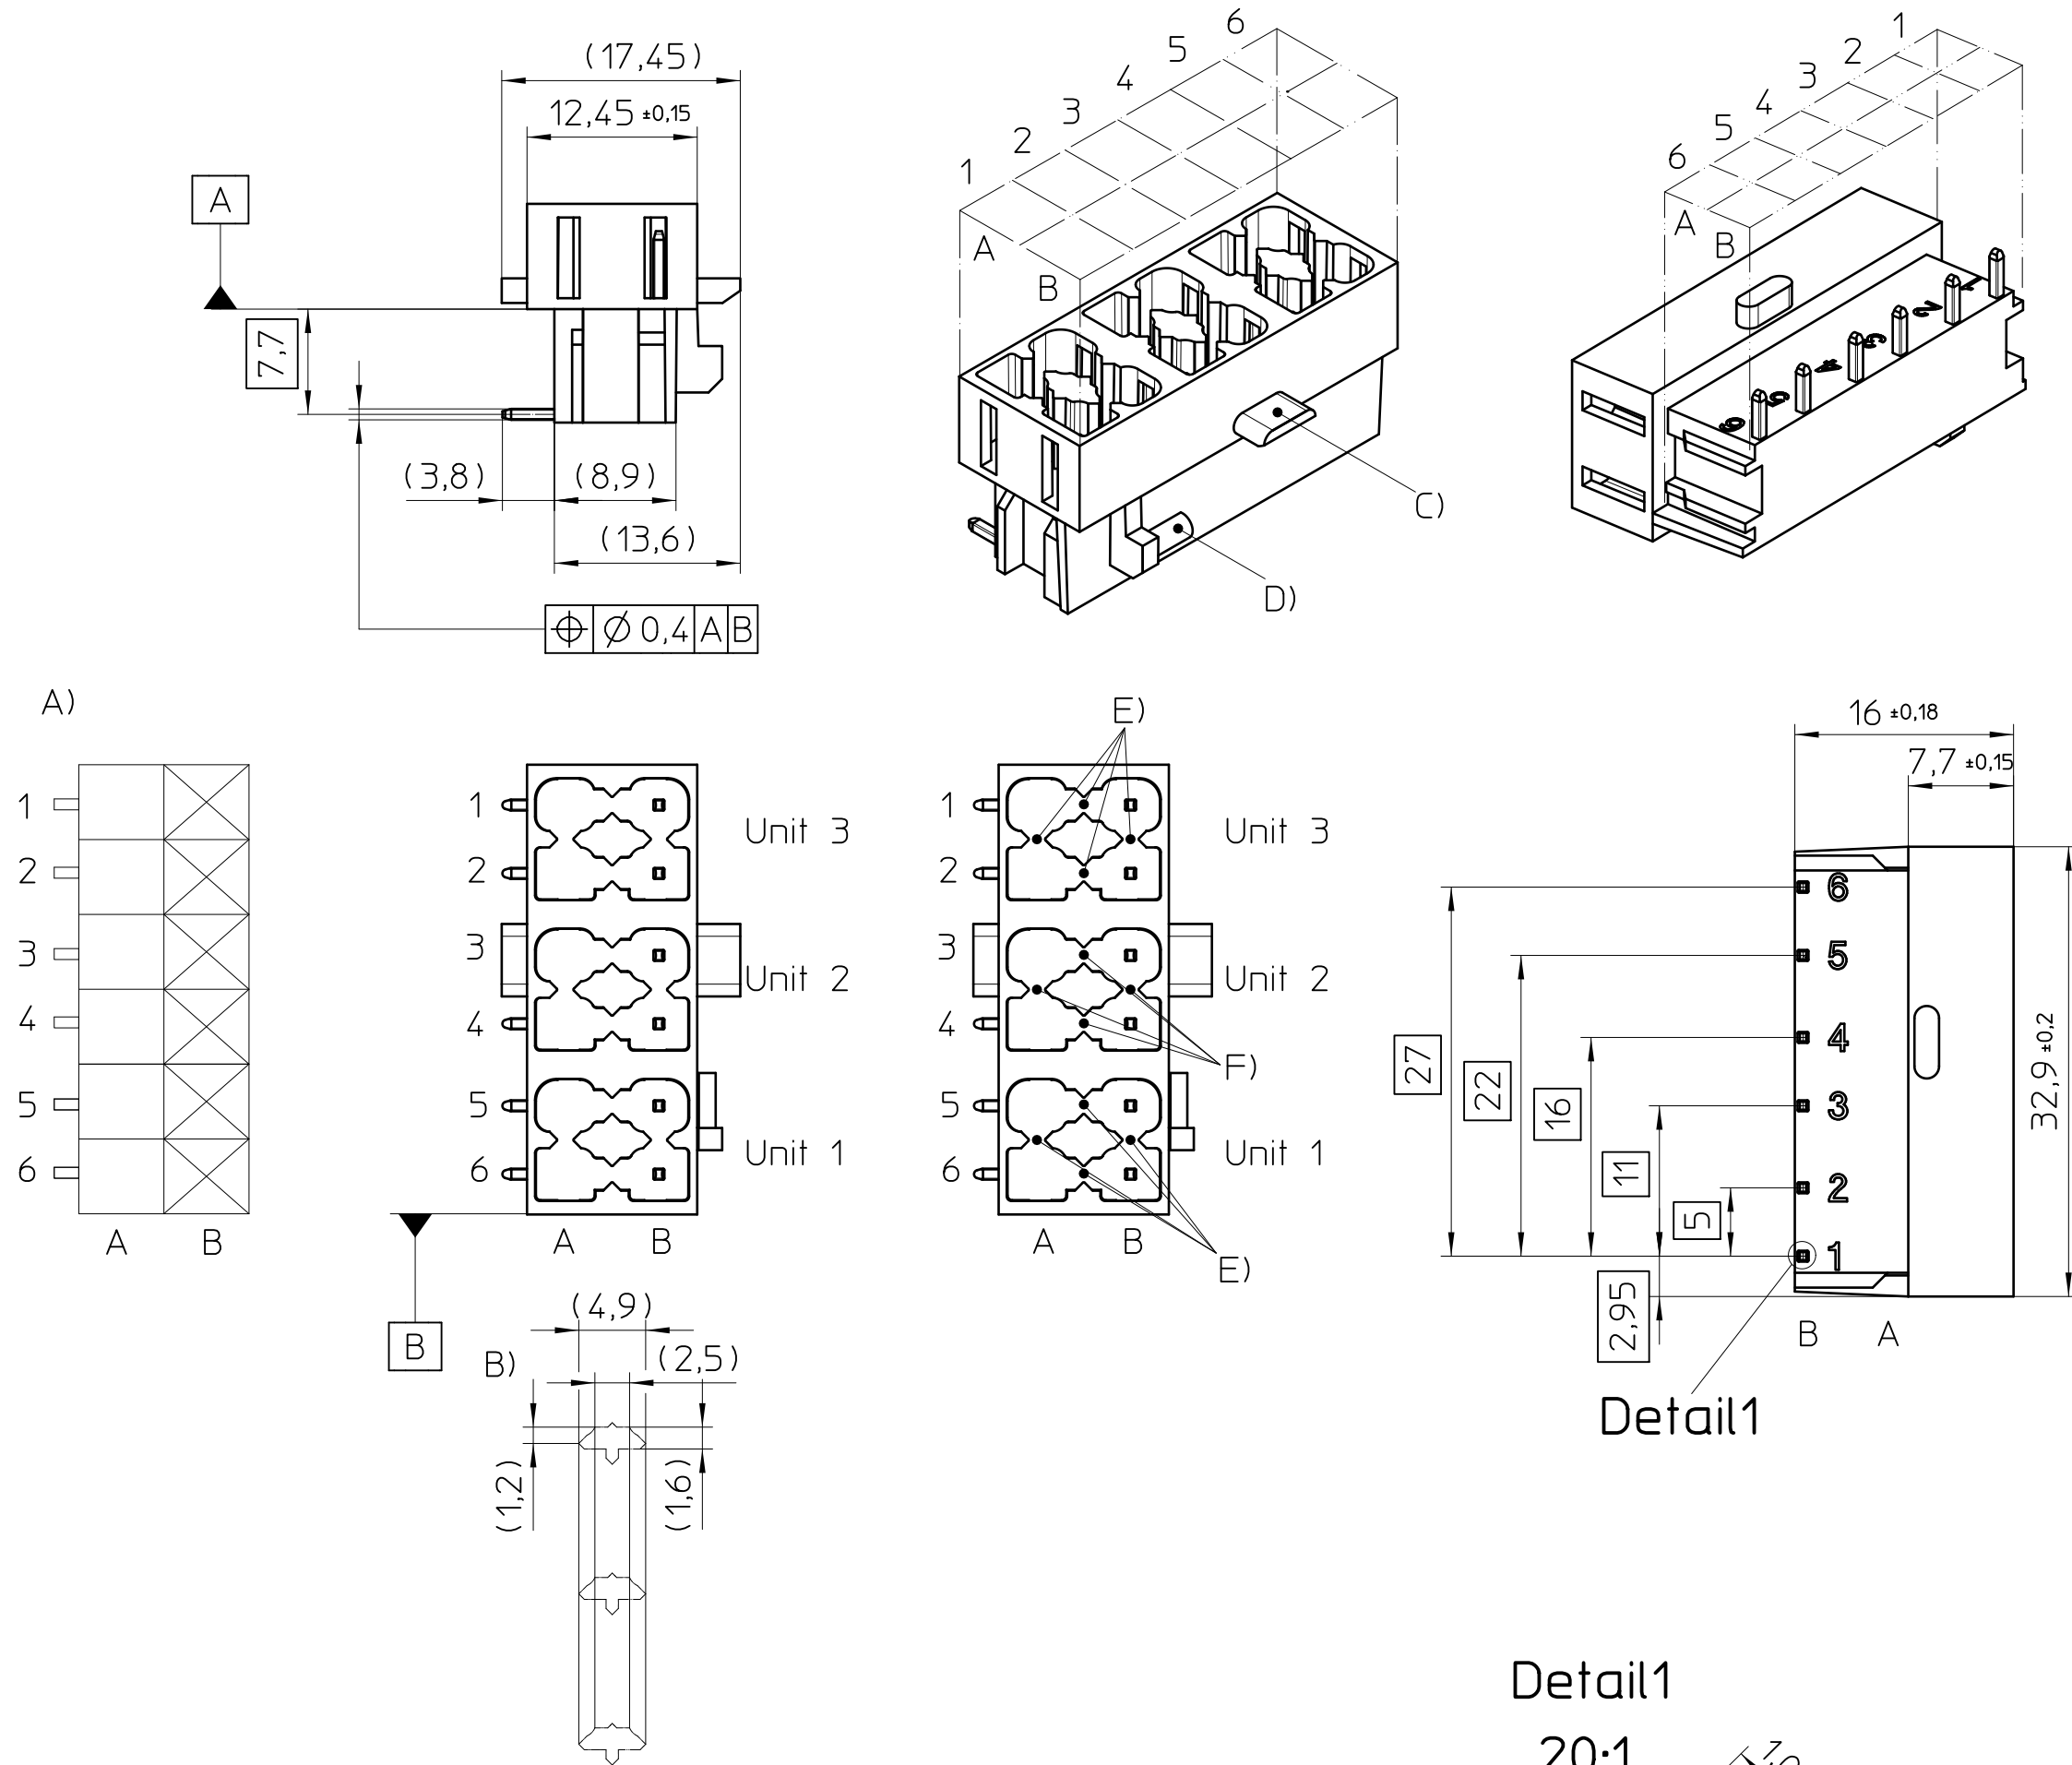


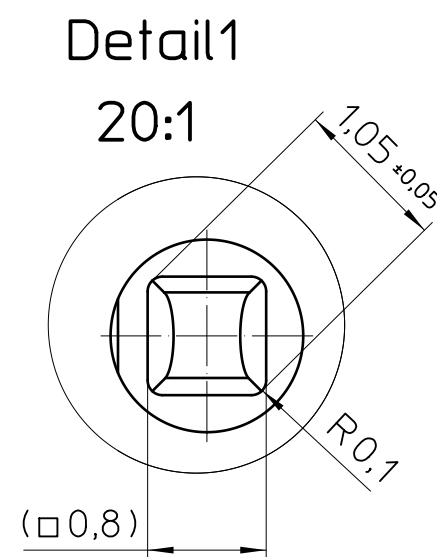

Recommended PCB drilling plan

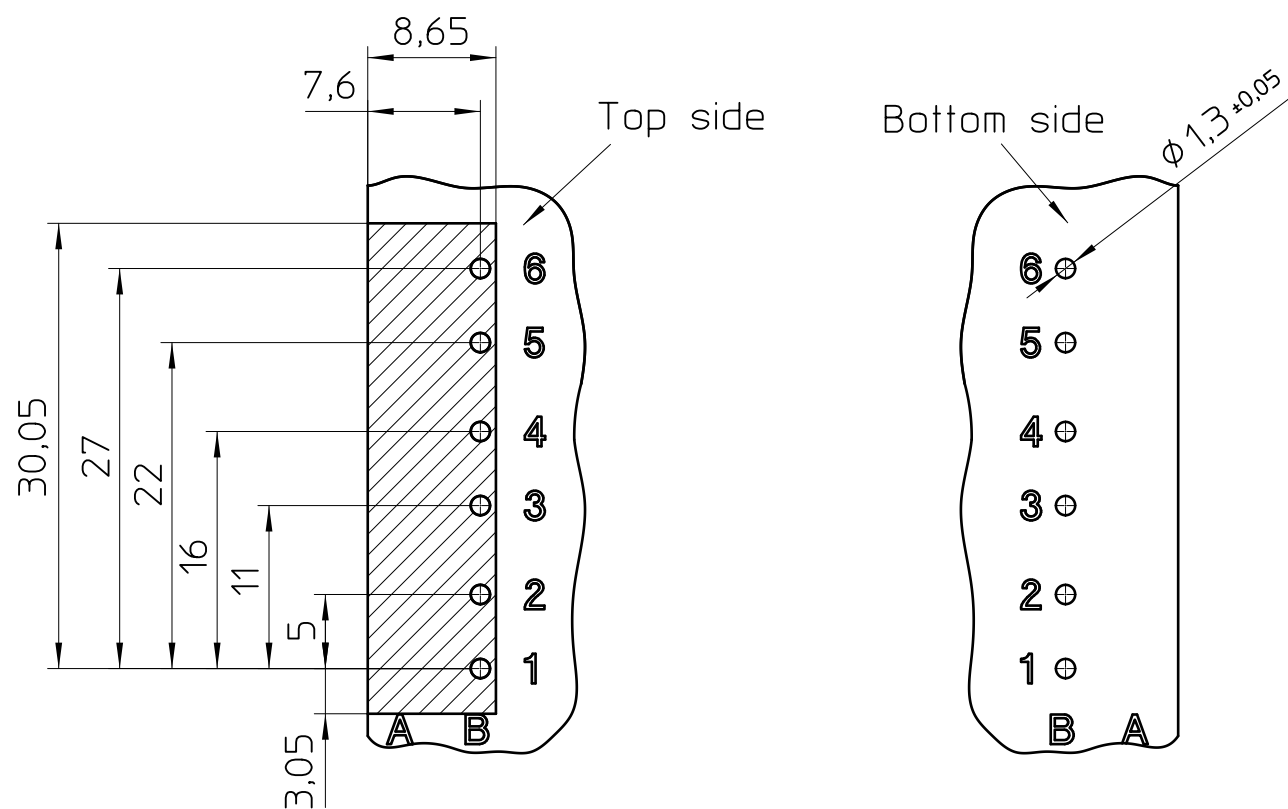


- General Information
- Simplified representation
 - Document excluded from change process
 - Linear dimensions [mm]
 - Tolerances apply in a normal climate according to DIN ISO 291-23/50-2
 - Web: www.phoenixcontact.com webcode: #0308
 - General tolerances for PCB: dimensions: $\pm 0,1/R \pm 0,2/\pm 1^\circ$
symmetry: 0,2
 - PCB-thickness: $1,6 \pm 0,2$
 - When using the base strip in housing from Phoenix Contact the PCB outline housing series must be used.
 - Restricted area
 - Corresponding plug for unit 1: HSCP-SP 2,5-1U...
 - Corresponding plug for unit 2: HSCP-SP 2,5-1U...
 - Corresponding plug for unit 3: HSCP-SP 2,5-1U...

Additional information:

A) Contact type

Wiring Diagram		
schematic symbol	description	electrical symbol
	pin contact	
	without pin contact	

B) Marking area/layout
marking example with recommended font height

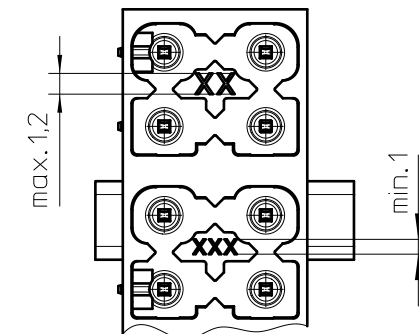


C) Lock and Release area

D) Fixation pin for spring

E) Coding area for CP-DMC 1,5

Mechanical coding not applicate before soldering

Mechanical coding possibilities after soldering

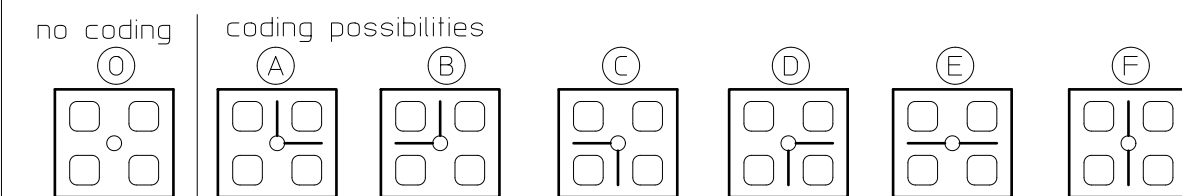

Coding possibilities for twin contact

