

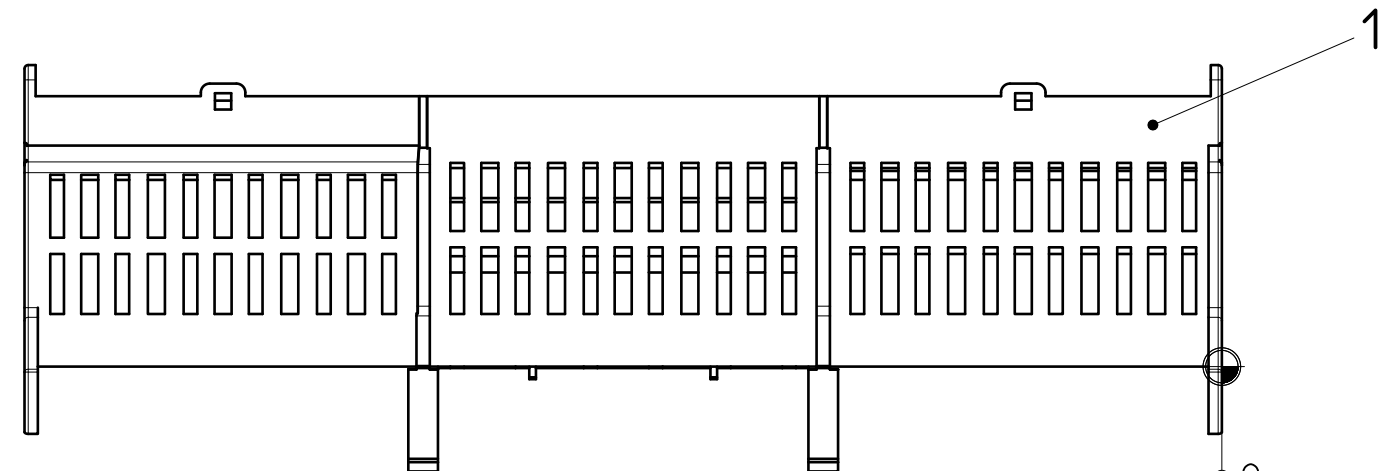


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

(1,67)

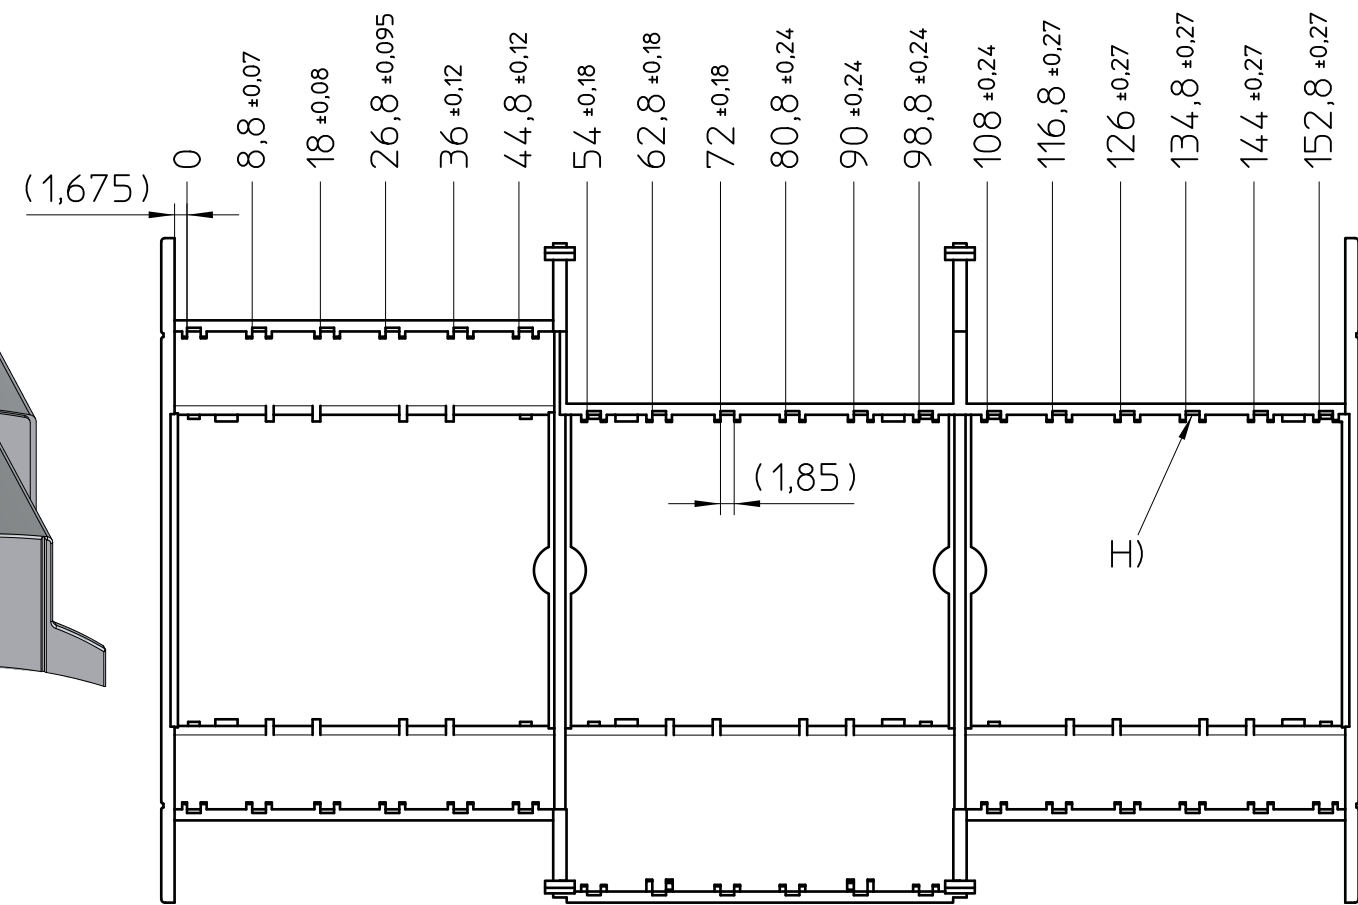

Technical drawing of a curved metal part. The drawing shows a side view of a component with a curved profile. The overall width is dimensioned as (54,85). The overall height is dimensioned as 89,7 with a tolerance of +0,3 / -0,24. The part features a central curved section with two small square holes. The top and bottom edges are reinforced with a thicker material. A small circular feature is visible on the left side.

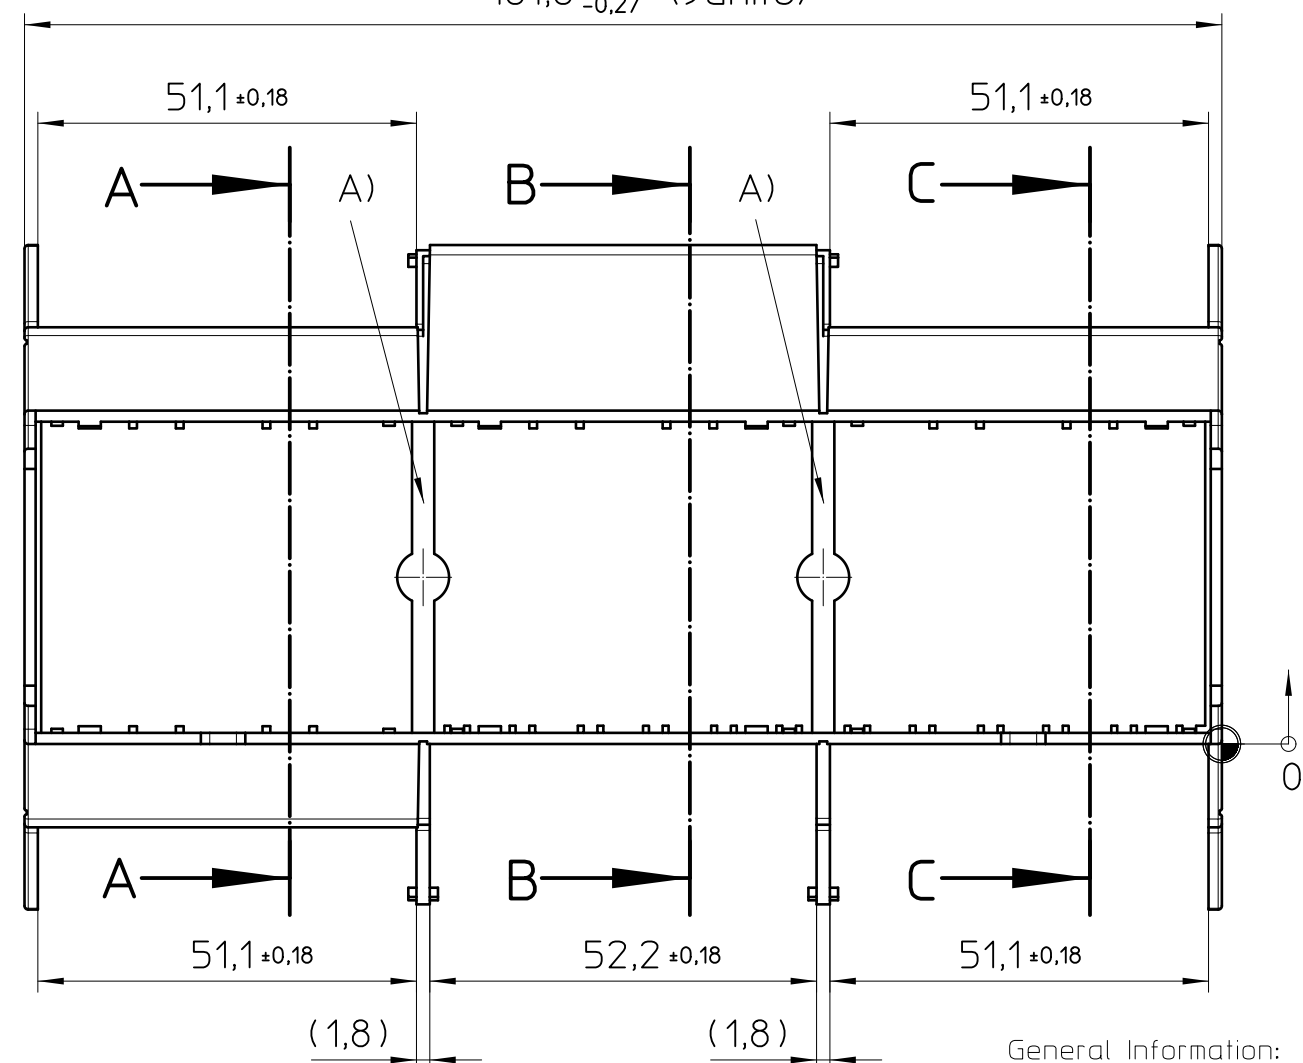

- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Further information: www.phoenixcontact.com
-  = Workpiece zero point for mechanical processing
- Tolerances for mechanical processing are ISO 2768-mK
- Tolerances for printing DIN ISO 2768-m
- Machining radii min. R1, further on request

Technical drawing of a chair showing a top view and a side view. The top view shows a curved backrest with a pivot point at the top center. The side view shows the chair's profile with numbered parts: 1 (backrest), 2 (seat), 3 (side panel), 4 (seat base), 5 (leg), and 6 (footrest). A pivot point is also indicated on the side view.

BC 161,6 OT 1 1 0 2 1 2

1 2 3 4 5 6

Technical drawing of a mechanical part, likely a pump housing, showing a cross-section A-A. The drawing includes dimensions: 40,7 ± 0,12, 30,2 ± 0,12, (1,8), 11,1 ± 0,08, 64,5 ± 0,18, 45 ± 0,12, and 11,1 ± 0,08. A coordinate system with origin O is shown at the bottom center.

The drawing consists of two parts. On the left is a 'partial view' (partial section) labeled 'D-D' at the top. It shows a cross-section of a component with a central cavity containing a series of small holes. A section line 'G' is indicated. On the right is the main view, a cross-section of a larger, curved component. It features a central cavity and a flange on the right. Section lines 'D' and 'E' are shown. Dimension lines indicate a total width of $54,7^{+0,3}_{-0,35}$, a distance of $43,8 \pm 0,2$ from the left edge to the start of the flange, and a distance of $6 \pm 0,12$ from the left edge to the start of the main body. A feature '1' is labeled on the right side of the main view.

Technical drawing showing a cross-section of a mechanical part. The drawing includes a dimension line indicating a height of $22,35 \pm 0,095$. The part features a curved profile and a flange with a central hole. The drawing is labeled with '22,35 ±0,095' and '22,35 ±0,095'.

- A) If PCB 7+8 used, the fin has to be removed
- B) Housing lower part BC...UT HBUS...
- C) Mounting rail like EN 60715: TH 35-7,5 or mounting rail TH 35-15x1,5 similar to EN 60715
- D) Cover BC...DKL R... or BC...DKL S...
- E) PCB 1 (main PCB)
- F) Position for PCB 9 or position for plate
- G) Plug for HBUS (PSTD 0,65X0,65/9-2,54)
- H) PCB guidance for vertical PCB 11

Pos.	QTY	Description	Material
1	1	MODULAR UPPER HOUSING	PC

	DIN A2	document-no. / ri	article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		01260511 / 01	1153038	1:1	
	date	document-type			
	04.02.2025	TECDOC 2D_Productdrawing			
description		BC 161,6 OT 110212 KMGY MQQ100			
of 1					