


KEYPAD

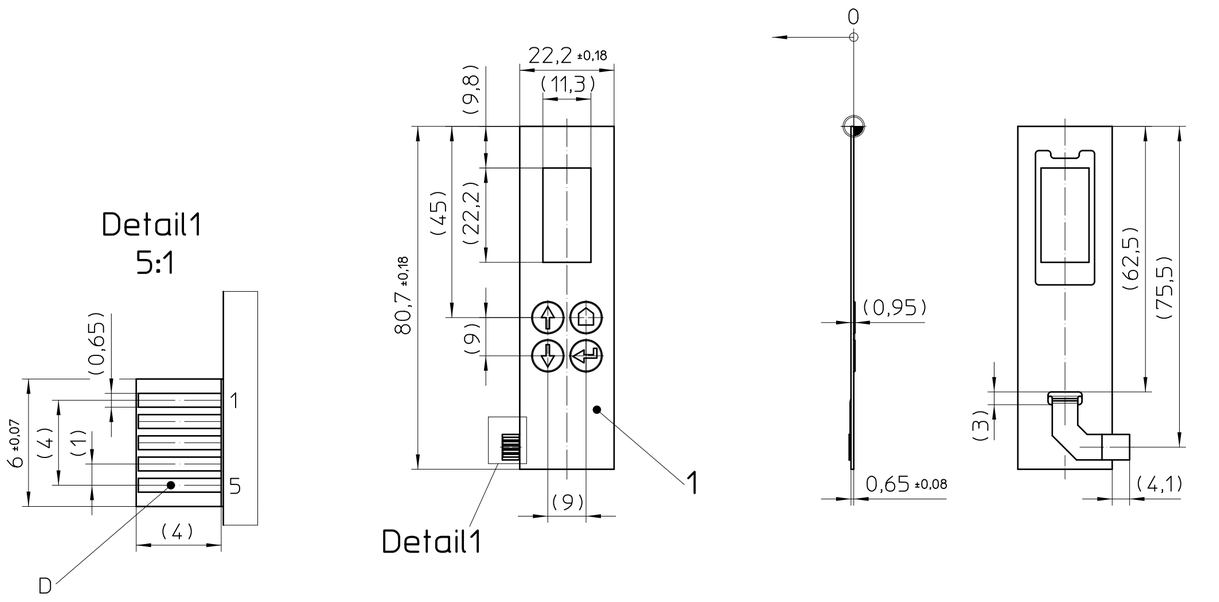

Marking and machining area

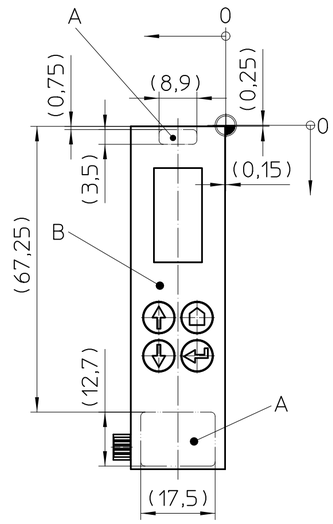


Assembly example

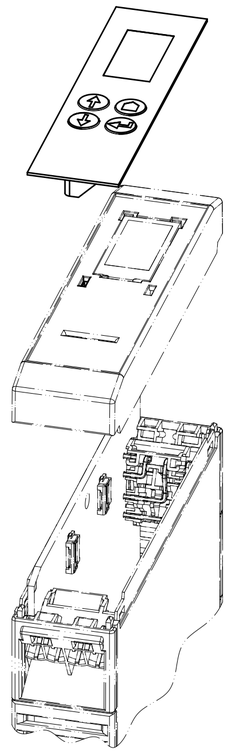




Wiring diagram



Positioning of keypad FFC to FFC connector on the PCB 2:1

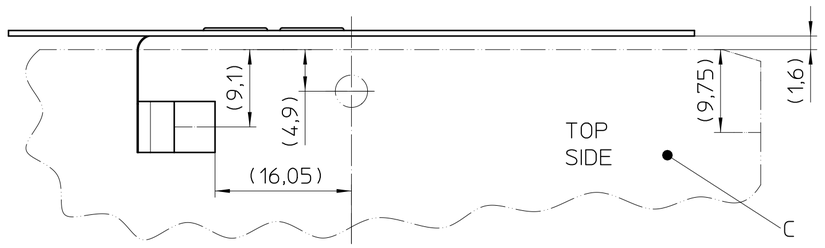

General Information:
- Simplified representation, exemplary shown in gray.
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Workpiece zero point for mechanical processing
- Tolerances for mechanical processing are ISO 2768-mK
- Machining radii min. R1, further on request
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:
A. Machining area
B. Marking area
C. PCB main
D. FFC keypad, t=0,3±0,06
 5 contacts, carbon plated

Pos.	QTY	Description	Material
1	1	KEYPAD	plastic

DIN A2	document-No. / RI 01309986 /03	date 03.04.2025	scale 1:1
PHOENIX CONTACT	ident.-No. 1215683	document-type TECDOC 2D_Productdrawing	
page 1 of 1	description KP ICS25X100 K4 C3 P5		

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.