



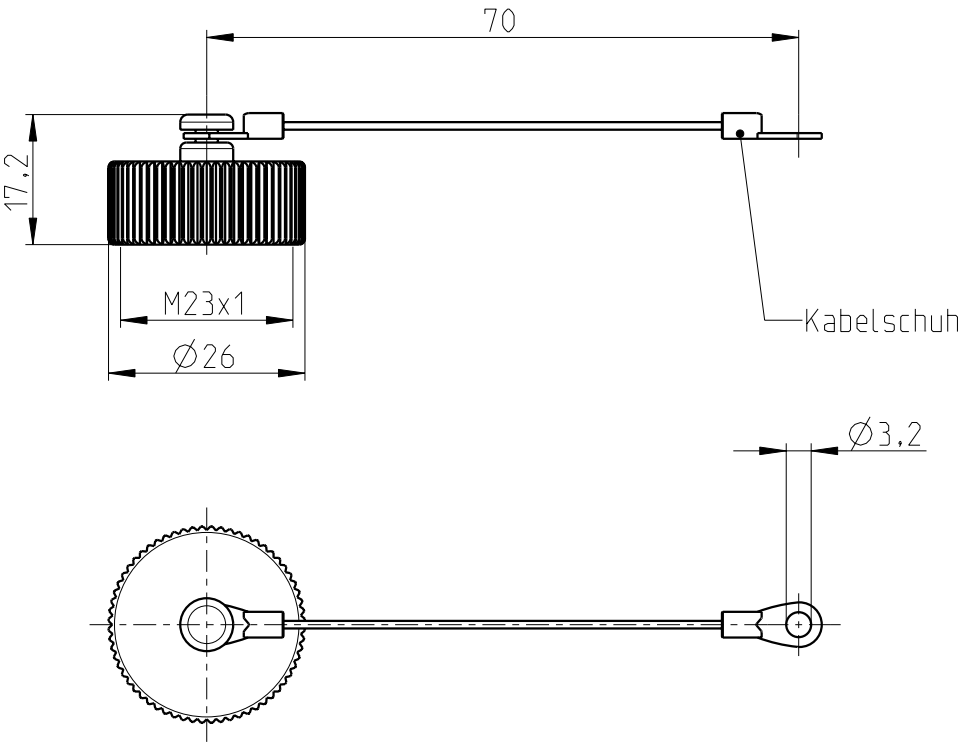

		Elektrische Daten									
Mechanische Daten		Bemessungsstrom bei max. Anschlußquerschnitt							Überspannungs-kategorie		
									Aufstellhöhe		
Polzahl		Bemessungsspannung							Durchgangswiderstand		
		Bemessungsstoßspannung							Verschmutzungsgrad		
Kontaktanschlussart									Technische Aenderung vorbehalten		Maßstab: 1:1
Kontakt-Ø											
Temperaturbereich		-15 °C / +110 °C					Datum	Name	Benennung: Serie RC Metall- Staubschutzkappe mit Seil für Geräte- und Kupplungssteckverbinder		
Schutzart						Bearb.	08.06.06	Thumm			
Steckzyklen						Gepr.					
		4	AAB170015	2017-06-30	Bengel						
Material		3	Rahmen angepasst	2015-09-03	Scherem				Zeichnungsnummer:		Blatt: 1 von: 2
Gehaeuse		2	Zg. überarbeitet	2013-10-22	Eitelbuß				RC-Z2064X		
Kontakttraeger/ISO		1	Zg. überarbeitet	03.11.08	Thumm						
Kontakte		Aus-gabe	Änderung	Datum	Name				Artikel-Nr.: 1241733		
Dichtungen		NBR									

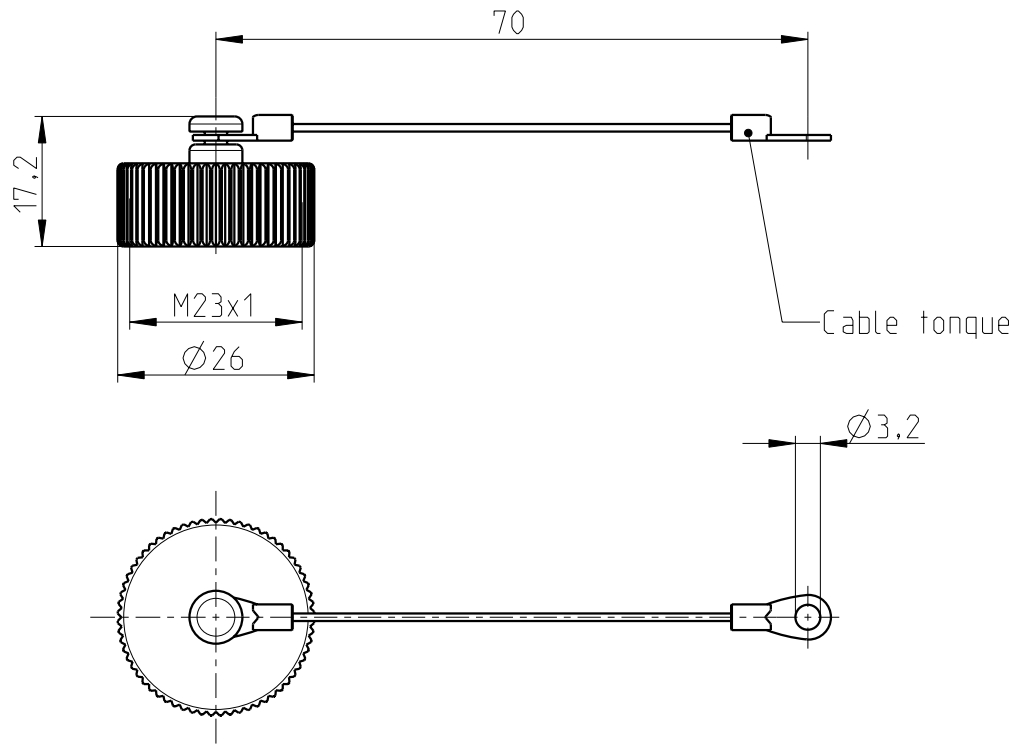

Electrical Data									
rated current at max. cross section							Overvoltage category		
							Altitude above sea level		
rated voltage							Contact resistance		
							degree of pollution		
							technical changes reserved		scale: 1:1
					date	name	description: Series RC Metal protection cap with cord for receptacles and cable connecting receptacles		
				design	08.06.06	Thumm			
				chk.					
							drawing no.: RC-Z2064X		page: 2 of: 2
	see page 1						order-no.: 1241733		
edi	changes	date	name						
tion									

Mechanical Data

No. of poles	
Contact termination	
Contact-Ø	
Temperature range	-15 °C / +110 °C
Protection class	
Mating cycles	
Material	
Housing	CuZn / Ni
Insert	
Contacts	
Seal	NBR