



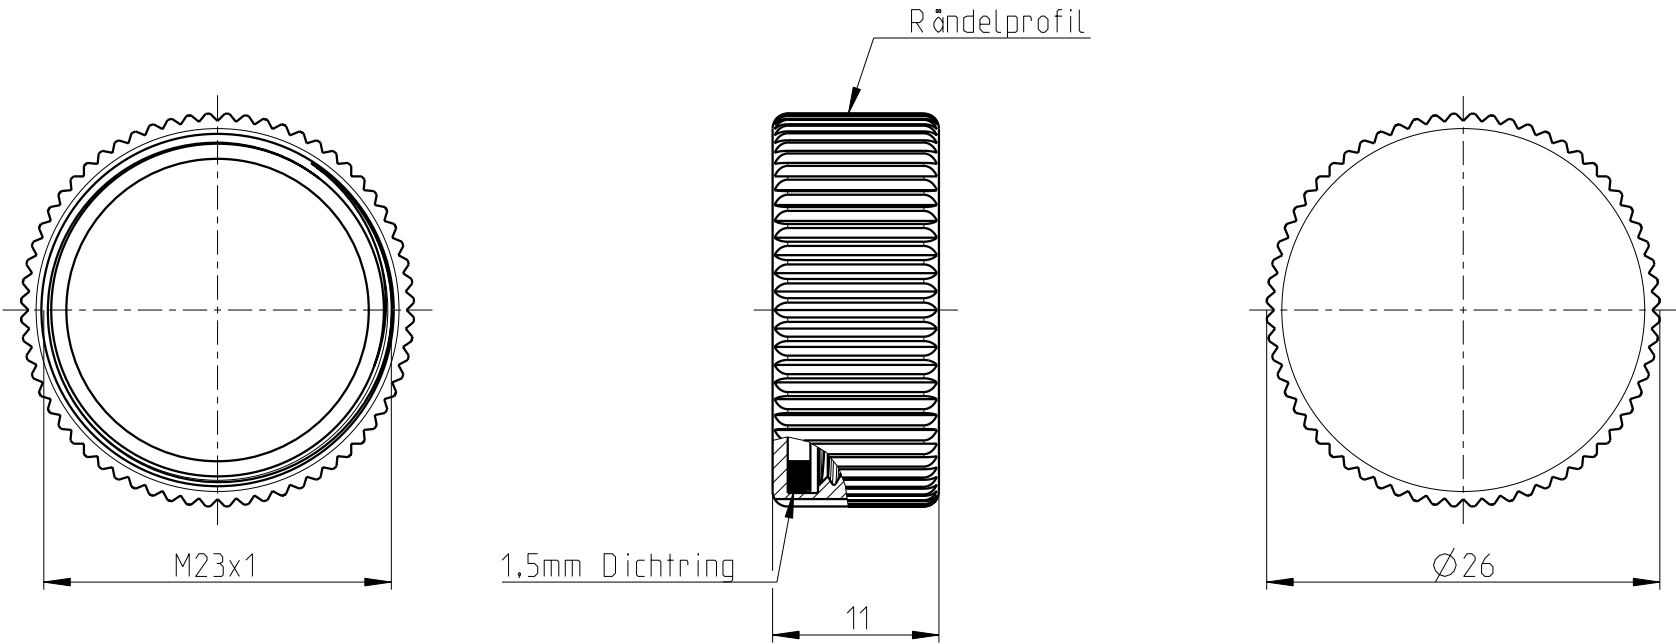

		Elektrische Daten											
		Bemessungsstrom bei max. Anschlußquerschnitt								Überspannungskategorie			
										Aufstellhöhe			
Mechanische Daten		Bemessungsspannung								Durchgangswiderstand			
Polzahl		Bemessungsstoßspannung								Verschmutzungsgrad			
Kontaktanschlussart									Technische Änderung vorbehalten			Maßstab: 2:1	
Kontakt-Ø													
Temperaturbereich		-40 °C / +110 °C					Datum	Name	Benennung: Serie RC Metall-Staubschutzkappe für Geräte- und Kupplungssteckverbinder mit M23 Außengewinde				
Schutzart		IP 67, verriegelt				Bearb.	02.05.08	Thumm					
Steckzyklen						Gepr.							
									Zeichnungsnummer: RC-Z2104X				
Material													
Gehäuse		CuZn / Ni							Blatt: 1 von: 2				
Kontaktträger/ISO													
Kontakte													
Dichtungen		NBR		Ausgabe	Änderung	Datum	Name	Artikel-Nr.: 1241739					

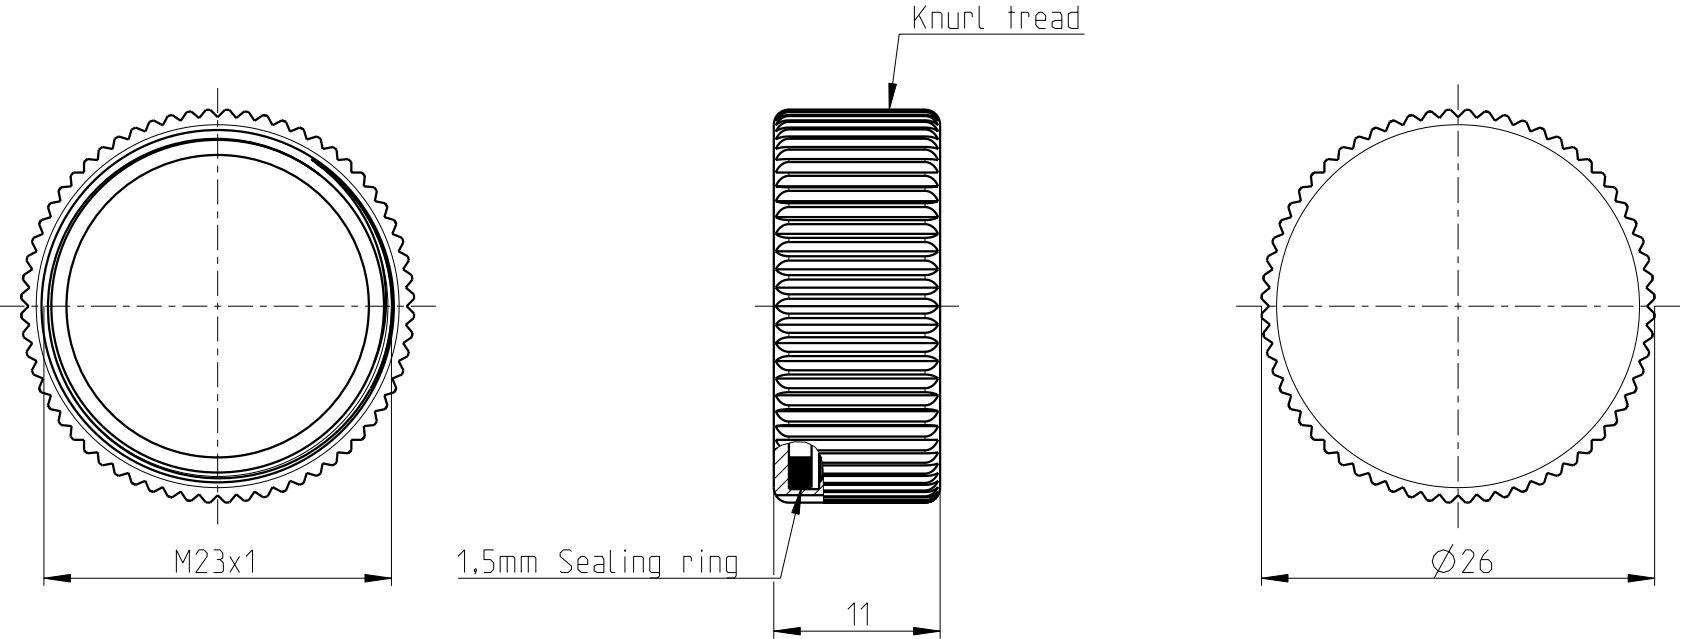

		Electrical Data											
Mechanical Data		Rated current at max. cross section								Surge voltage category			
										Installation height			
Number of pos./ Contact style		Rated voltage								Contact resistance			
Contact termination		Rated surge voltage								Degree of pollution			
Contact-Ø									technical changes reserved			scale: 2:1	
Temperature range		-40 °C / +110 °C											
Degree of protection		IP 67, when locked											
Mechanical insertion/withdrawal cycles						design	date	name	description: Series RC Metal protection cap for receptacles and cable connecting receptacles with M23 outside threading				
						chk.							
Material									drawing no.:			page: 2 of: 2	
Housing		CuZn / Ni							RC -Z2104 X				
Insulating body		see page 1											
Contacts		edition	changes	date	name				order-no.:			1241739	
Seal		NBR											