


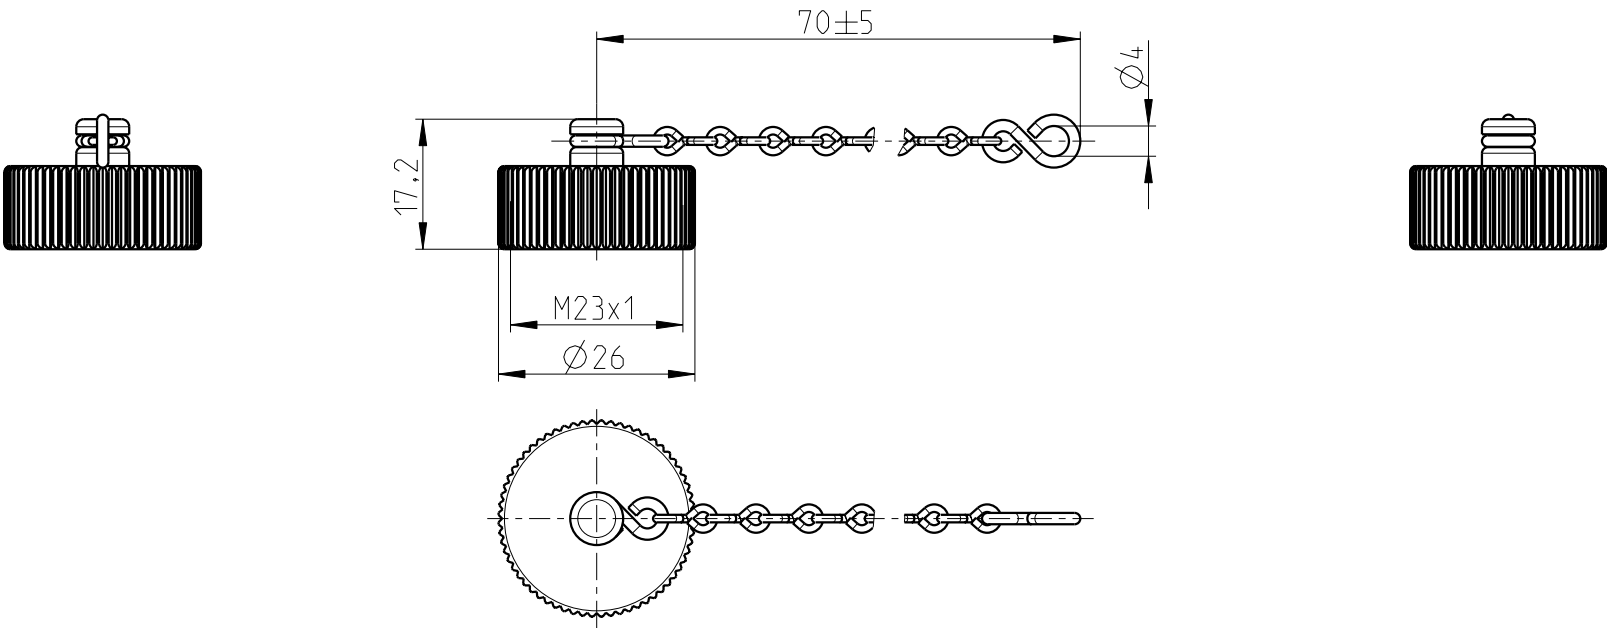


Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungs- kategorie			
						Aufstellhöhe			
Bemessungsspannung						Durchgangswiderstand			
Bemessungsstoßspannung						Verschmutzungsgrad			
							Technische Aenderung vorbehalten		Maßstab: 1:1
					Datum	Name	Benennung: Serie RC Metall-Staubschutzkappe mit Kette und S-Haken für Gerätesteckverbinder		
				Bearb.	2010-01-18	Bengel			
				Gepr.					
							Zeichnungsnummer: RC-Z2250X		
				CONINVERS Ein Unternehmen der Phoenix Contact Gruppe			Blatt: 1 von: 2		
1	Zeichnung überarbeitet	2014-07-02	Bengel				Artikel Nr.. 1241768		
Aus- gabe	Änderung	Datum	Name						

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmustieranmeldungen durchzuführen.
CONINVERS GmbH Heisenbergstrasse 1 D-71083 Herrenberg

The copying, distribution and utilisation of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

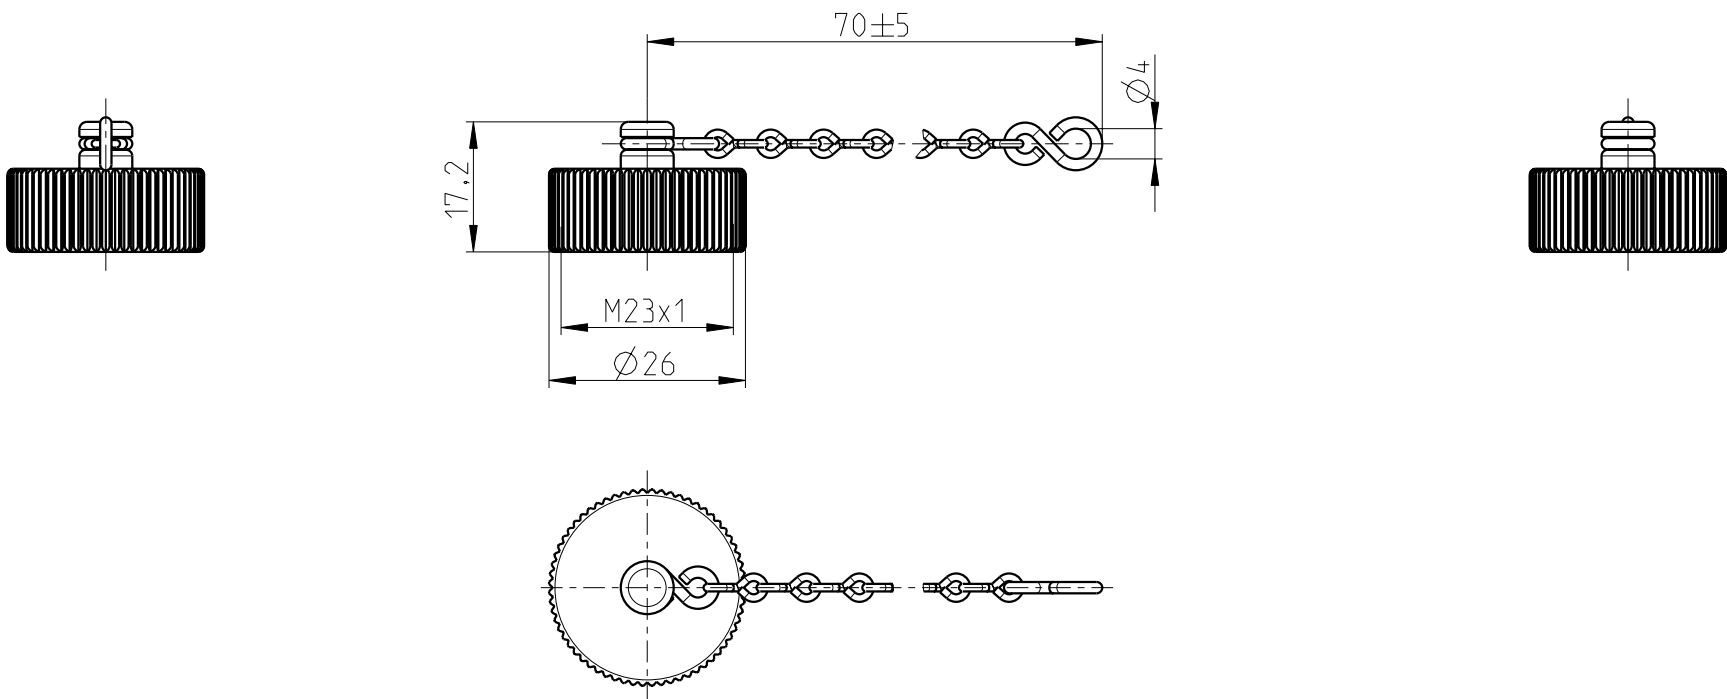

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Electrical Data									
Rated current at max. cross section						Surge voltage category			
						Installation height			
Rated voltage						Contact resistance			
Rated surge voltage						Degree of pollution			
							technical changes reserved		scale: 1:1
					date	name	description: Series RC Metal protection with chain and S-hook for Receptacle		
				design	2010-01-18	Scheremet			
				chk.					
							drawing no.: RC -Z2250X		
	see page 1			CONINVERS A Company of Phoenix Contact Group			page: 2 of: 2		
edition	changes	date	name						
							order no.: 1241768		

Mechanical Data

Number of pos./ Contact style	
Contact termination	
Contact-Ø	
Temperature range	-15 °C / +110 °C
Degree of protection	
Mechanical insertion/withdrawal cycles	
Material	
Housing	CuZn / Ni
Insulating body	
Contacts	
Seal	NBR

CONINVERS
A Company of Phoenix Contact Group

design date name
chk. 2010-01-18 Scheremet
description:
Series RC
Metal protection with chain and S-hook for Receptacle
drawing no.:
RC -Z2250X
order no.: 1241768
page: 2
of: 2