





Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt				Überspannungs- kategorie					
				Aufstellhöhe					
Mechanische Daten		Bemessungsspannung				Durchgangswiderstand			
Polzahl / Kontaktart		Bemessungsstoßspannung				Verschmutzungsgrad			
Kontaktanschlussart						Technische Änderung vorbehalten			Maßstab: 2:1
Kontakt-Ø									
Temperaturbereich						Benennung: Serie ST Kontermutter M18x0,75			
Schutzart									
Steckzyklen									
Material						Zeichnungsnummer: ST-E2015151X			Blatt: 1 von: 2
Gehäuse	CuZn / Ni								
Kontaktträger/ISO		1	Artikel Nr. richtig gestellt	2016-03-01	Bengel	Artikel Nr.: 1242824			
Kontakte		Aus- gabe	Änderung	Datum	Name				
Dichtungen									

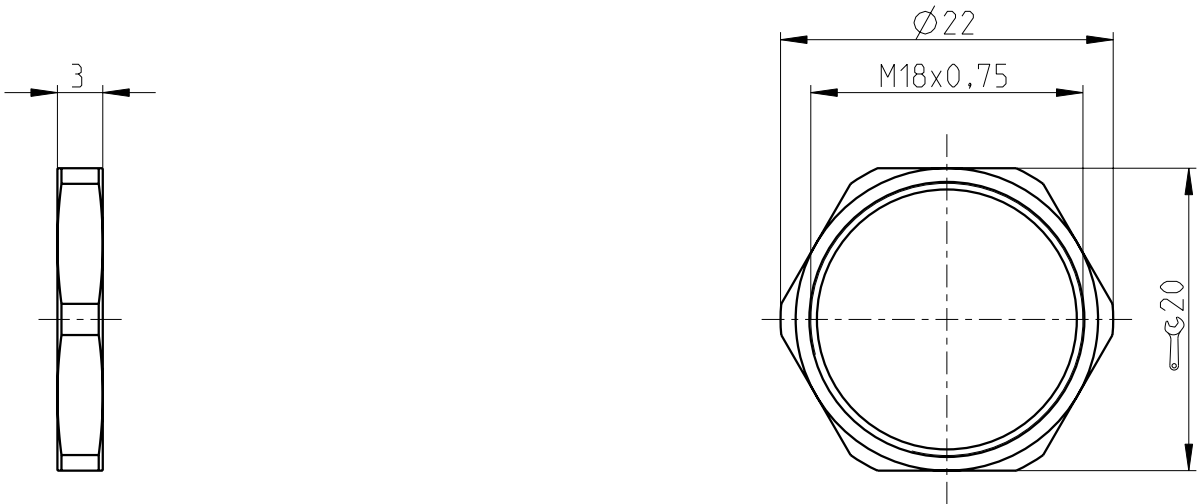

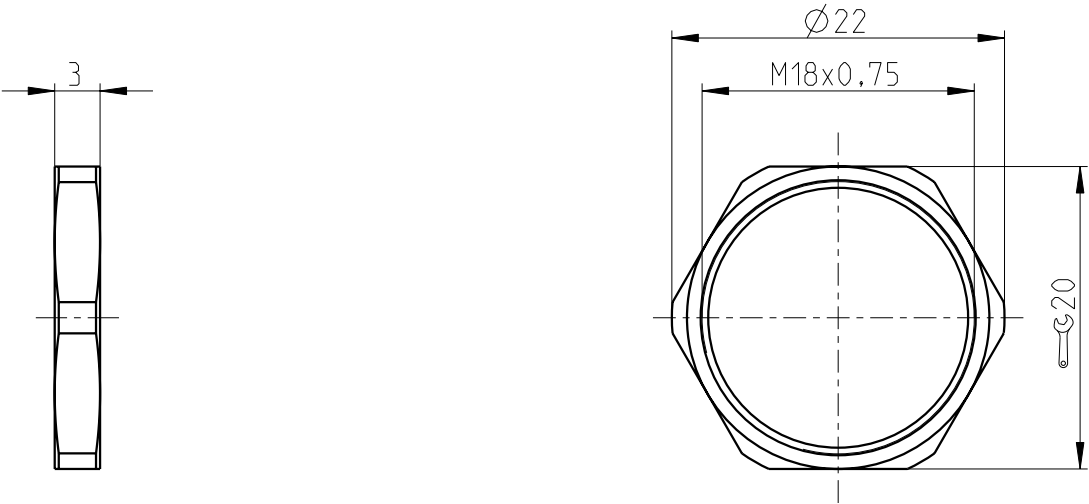

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

		Electrical Data										
		Rated current at max. cross section							Surge voltage category			
Mechanical Data									Installation height			
Number of pos./ Contact style		Rated voltage							Contact resistance			
Contact termination		Rated surge voltage							Degree of pollution			
Contact-Ø									technical changes reserved		scale: 2:1	
Temperature range												
Degree of protection							date	name	description: Series ST Nut M18x0,75			
Mechanical insertion/withdrawal cycles						design	2015-12-15	Bengel				
						chk.						
Material									drawing no.:		page: 2 of: 2	
Housing		CuZn / Ni							ST-E2015151X			
Insulating body		see page 1							order no.: 1242824			
Contacts		edition	changes	date	name							
Seal												