





		Elektrische Daten												
		Bemessungsstrom bei max. Anschlußquerschnitt								Überspannungskategorie				
										Aufstellhöhe				
Mechanische Daten		Bemessungsspannung								Durchgangswiderstand				
Polzahl / Kontaktart		Bemessungsstoßspannung								Verschmutzungsgrad				
Kontaktanschlussart									Technische Änderung vorbehalten				Maßstab: 1:1	
Kontakt-Ø														
Temperaturbereich		-40 °C / +130 °C					Datum	Name	Benennung: Serie SB und SM Metall- Staubschutzkappe mit Bolzen für Geräte- und Kupplungssteckverbinder					
Schutzart		IP68 / IP6k9k				Bearb.	2015-06-03	Bengel						
Steckzyklen						Gepr.								
Material									Zeichnungsnummer:				Blatt: 1 von: 2	
Gehaeuse		CuZn / Ni		2	Schutzkappe m. Bolzen				2017-02-06	Gulde	SB-Z0001X			
Kontakttraeger/ISO				1	O-Ring #5013560 hinzu				2016-10-11	Bengel				
Kontakte				Aus-	Änderung				Datum	Name	Artikel-Nr.: 1244989			
Dichtungen		FKM		gabe										

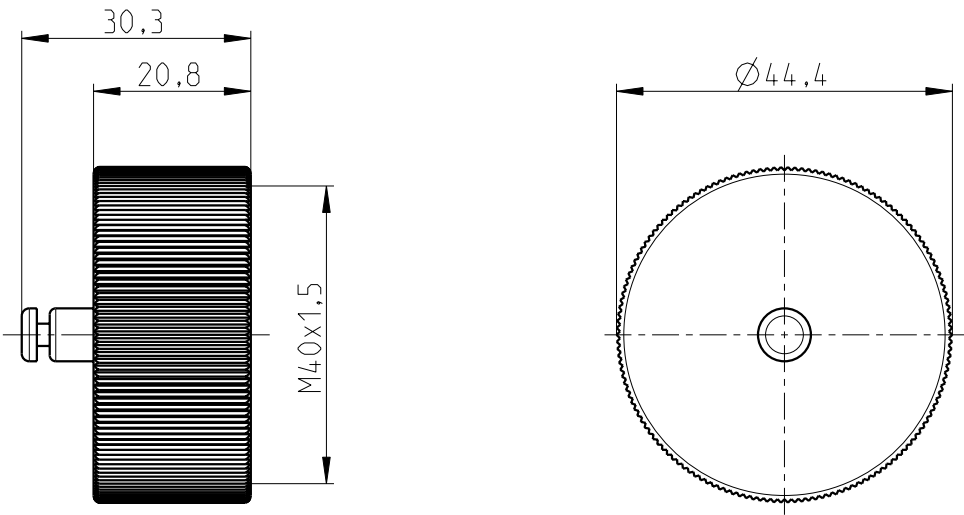

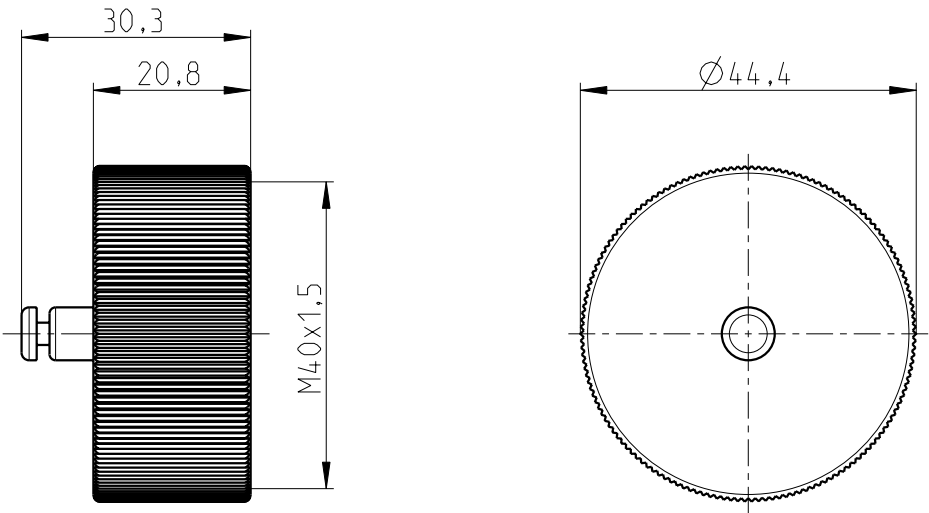

Electrical Data									
Mechanical Data		Rated current at max. cross section				Surge voltage category			
		Rated voltage				Installation height			
Number of pos./ Contact style		Rated surge voltage				Contact resistance			
Contact termination						Degree of pollution			
Contact-Ø						technical changes reserved			scale:
Temperature range	-40 °C / +130 °C								1:1
Degree of protection	IP68 / IP6k9k					description: Series SB und SM MEtal protection cap with bolt for receptacles and cable connecting receptacles			
Mechanical insertion/withdrawal cycles									
Material						drawing no.: SB-Z0001X			page: 2 of: 2
Housing	CuZn / Ni								
Insulating body			see page 1			order-no.: 1244989			
Contacts		edi	changes	date	name				
Seal	FKM	tion							