



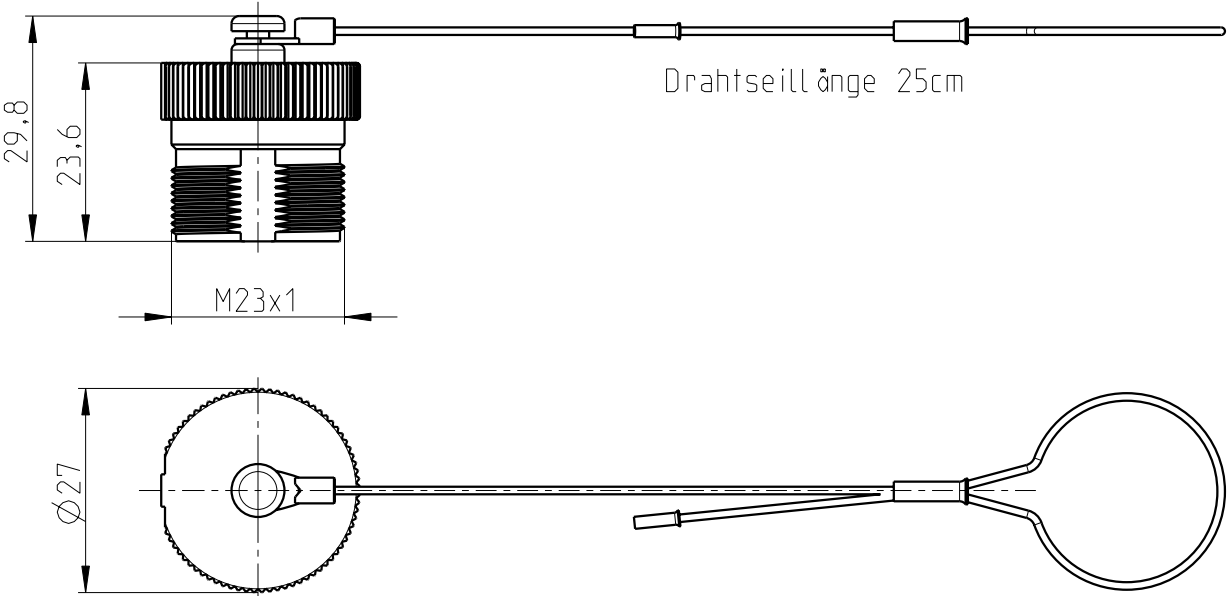

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten													
Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungs-kategorie							
						Aufstellhöhe							
Bemessungsspannung						Durchgangswiderstand							
Bemessungsstoßspannung						Verschmutzungsgrad							
							Technische Änderung vorbehalten		Maßstab: 1:1				
					Datum	Name	Benennung: Serie CA Metall-Staubschutzkappe mit Seil für Kabelsteckverbinder						
				Bearb.	2015-11-18	cobv01							
				Gepr.									
2	AAB170015	2017-06-30	Gulde				Zeichnungsnummer: CA-Z0077X		Blatt: 1 von: 2				
1	AAB150094 Staubschutzkappe ge.ä.	2016-12-21	Bengel										
Aus-gabe	Änderung	Datum	Name										

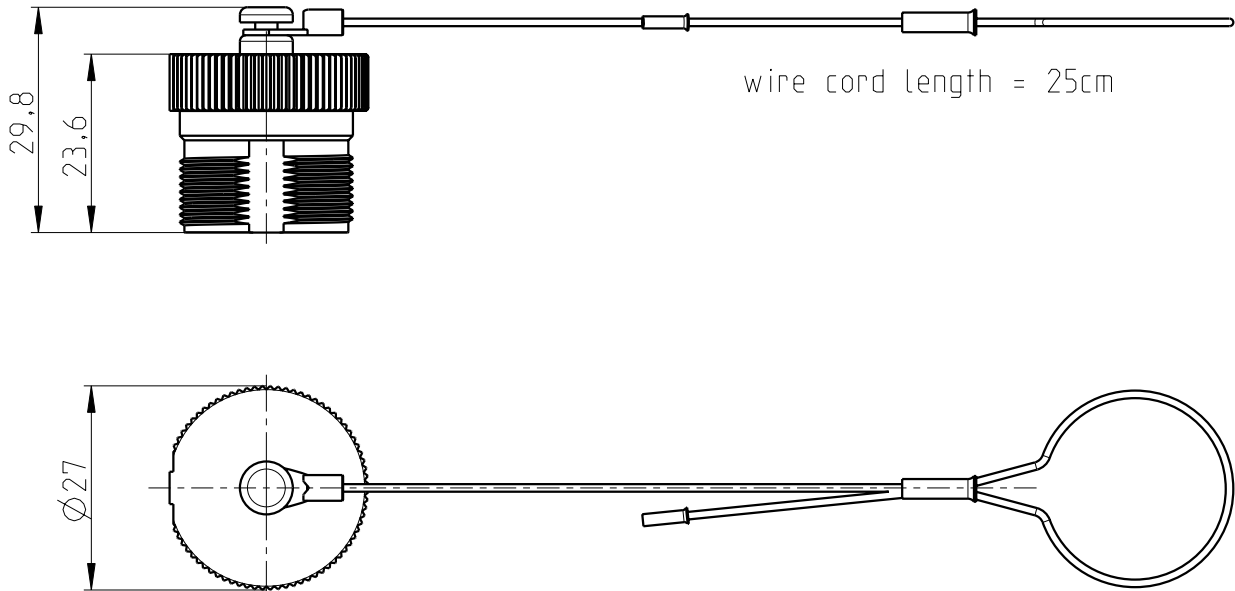

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Mechanical Data		Electrical Data				Surge voltage category		Installation height	
Number of pos./ Contact style		Rated current at max. cross section							
Contact termination		Rated voltage						Contact resistance	
Contact-Ø		Rated surge voltage						Degree of pollution	
Temperature range	-40 °C / +125 °C					technical changes reserved		scale: 1:1	
Degree of protection									
Mechanical insertion/withdrawal cycles									
Material								description: Series CA metal-protection cap for cable connector	
Housing	CuZn / Ni								
Insulating body			see page 1						
Contacts		edition	changes	date	name	drawing no.: CA-Z0077		page: 2 of: 2	
Seal	FKM								
						order no.: 1245447			