

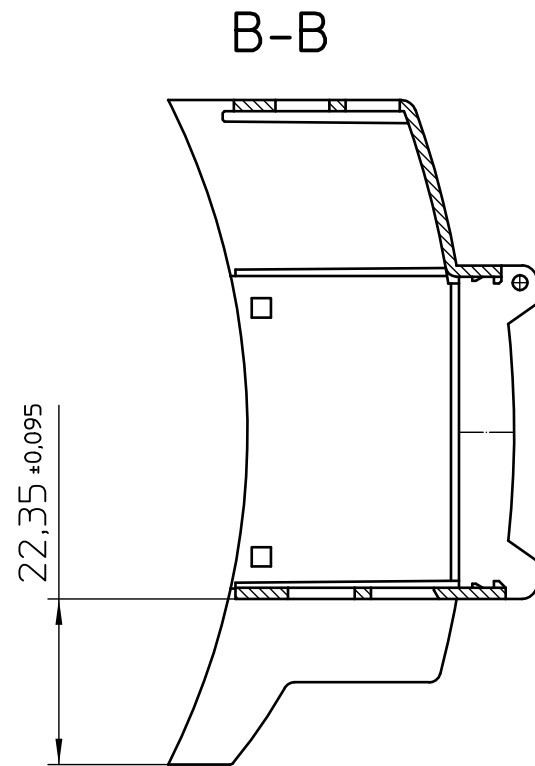
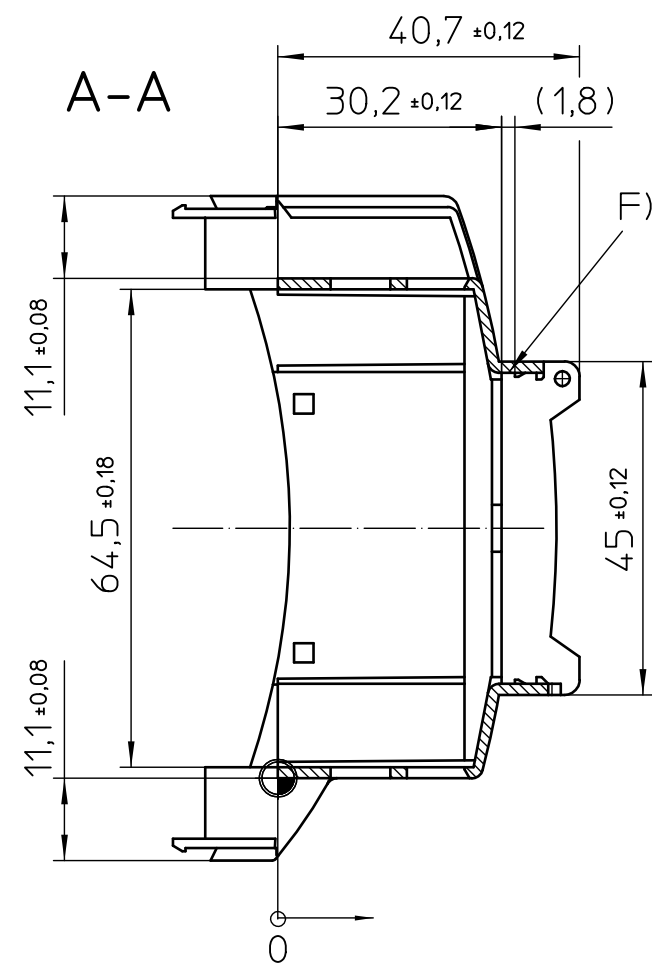
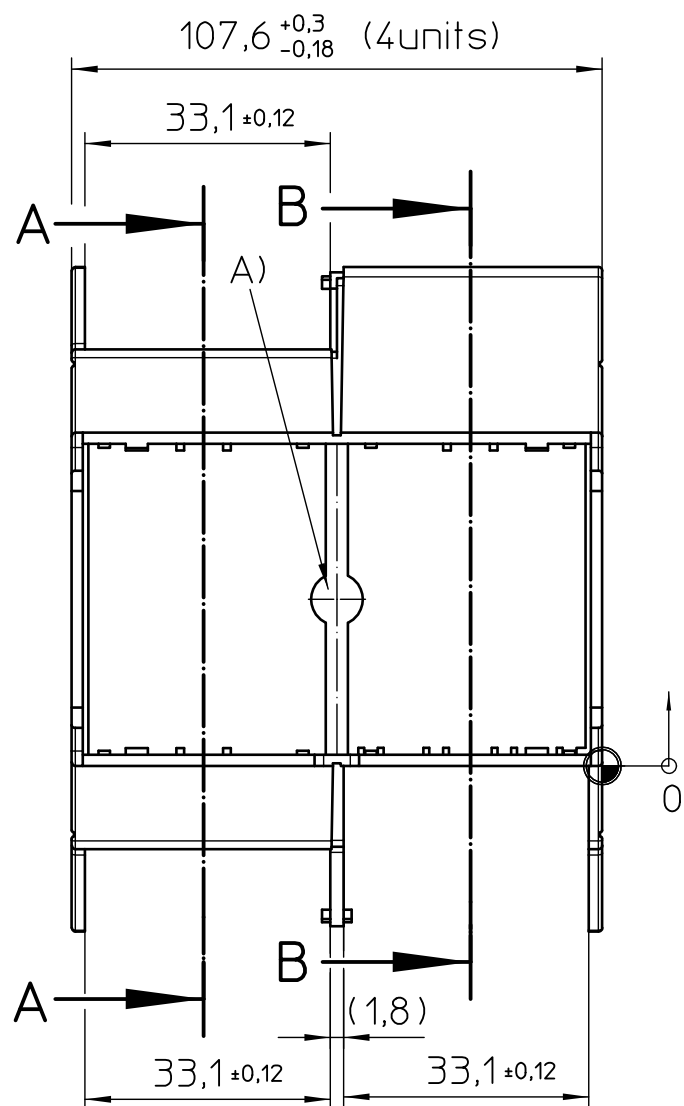
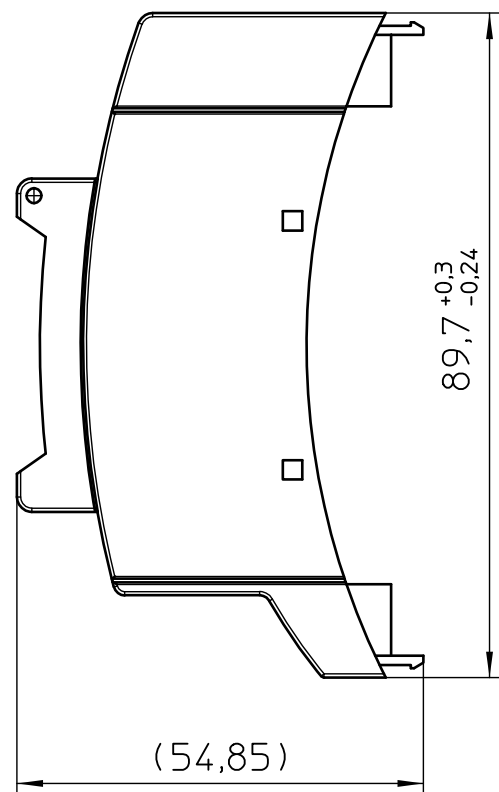
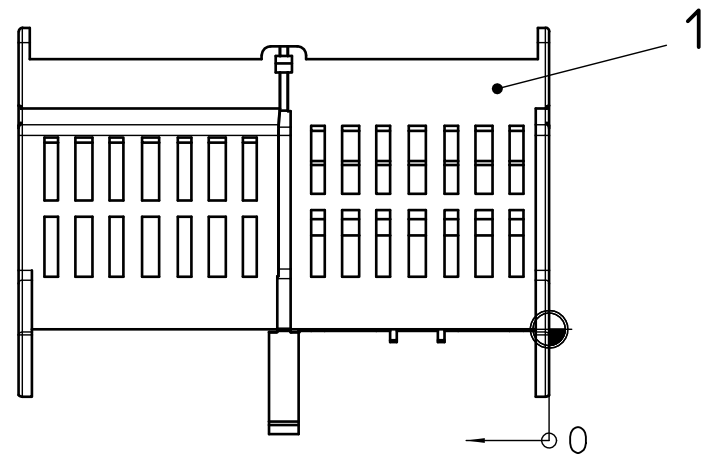
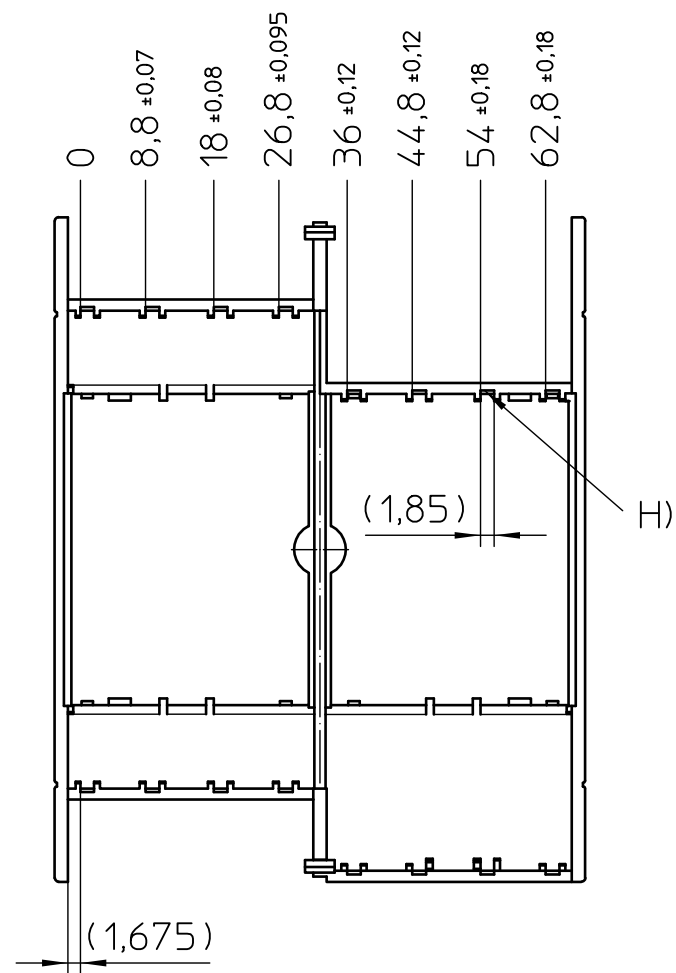


HOUSING UPPER PART (Assembly example BC 71,6 OT 1102)

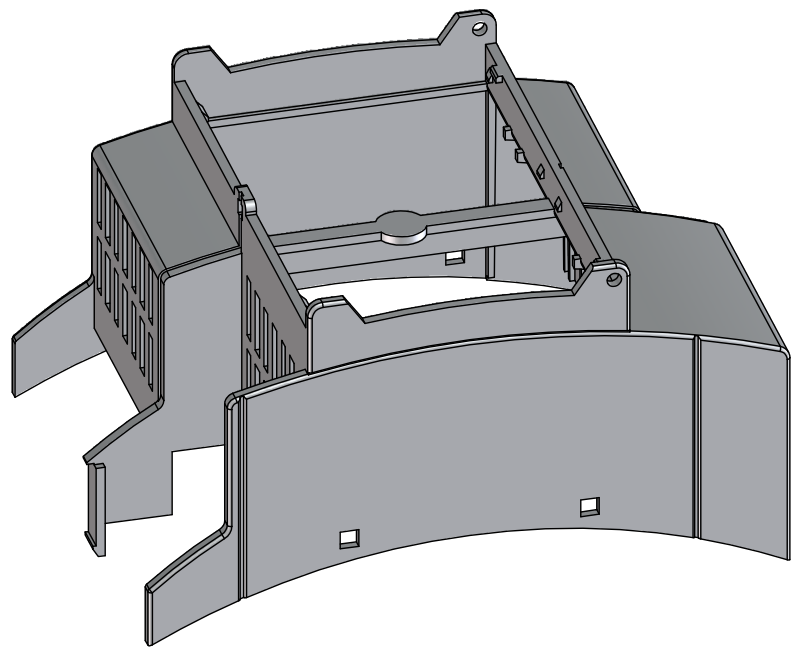

Configuration example

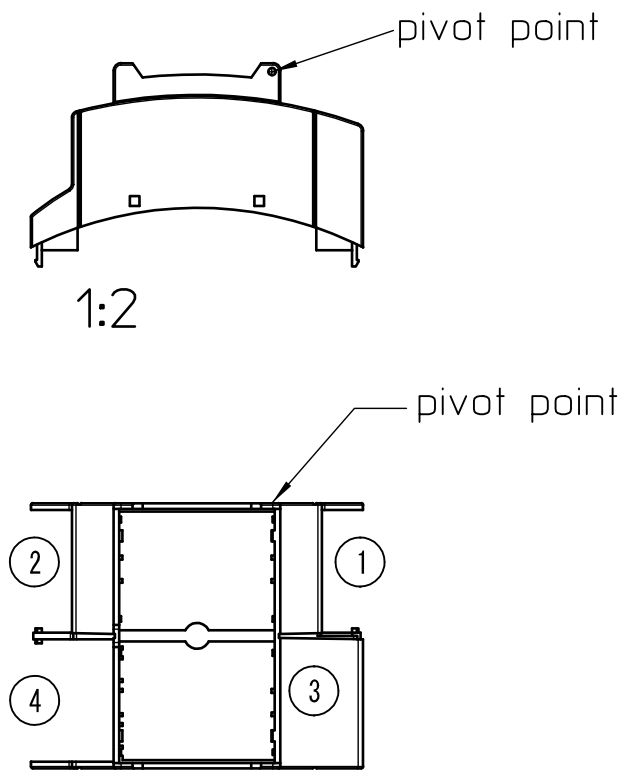


Order code
(representation example)
BC 71,6 OT 1102

BC 71,6 OT 1 1 0 2
① ② ③ ④

Terminal installation depth: 0=0mm, 1=11mm, 2=22mm

Assembly example

Overall dimensions complaint DIN 43880

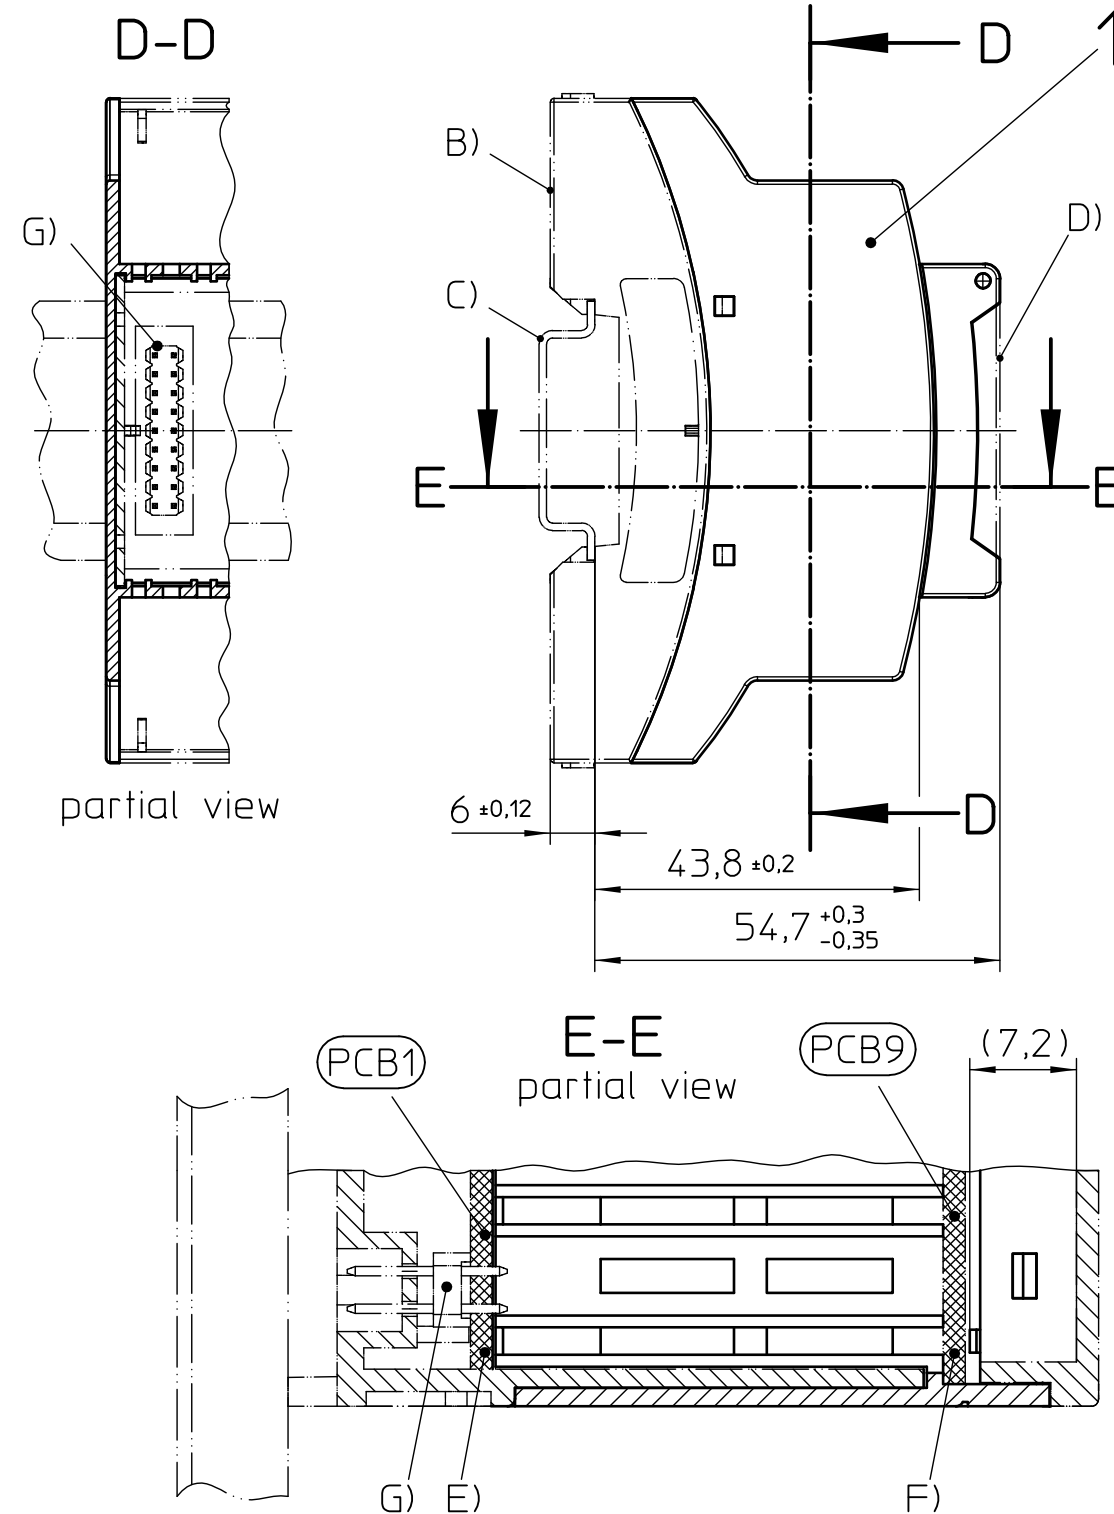

- General Information:
- Simplified representation
 - Document excluded from change process
 - Units are in millimeters (mm) and degrees (°)
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
 - Further information: www.phoenixcontact.com webcode: #0675
 - ⊕ = Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing are ISO 2768-mk
 - Tolerances for printing DIN ISO 2768-m
 - Machining radii min. R1, further on request

- Additional Information:
- A) If PCB 7+8 used, the fin has to be removed
 - B) Housing lower part BC...UT HBUS...
 - C) Mounting rail like EN 60715: TH 35-7,5 or mounting rail TH 35-15x1,5 similar to EN 60715
 - D) Cover BC...DKL R... or BC...DKL S...
 - E) PCB 1 (main PCB)
 - F) Position for PCB 9 or position for plate
 - G) Plug for HBUS (PSTD 0,65X0,65/9-2,54)
 - H) PCB guidance for vertical PCB 11

Pos.	QTY	Description	Material
1	1	MODULAR UPPER HOUSING	PC
DIN A2		document-No. / R1 01276879 / 00	date 08.03.2021
1304742		document-type TECDOC 2D_Productdrawing	scale 1:1
page 1 of 1		BC 71,6 OT 0C10C1 KMGY	