

A

B

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

C


D

E


F

UM-PRO-KIT-B108-L....

Assembly example UM-PRO-KIT-B108-L200

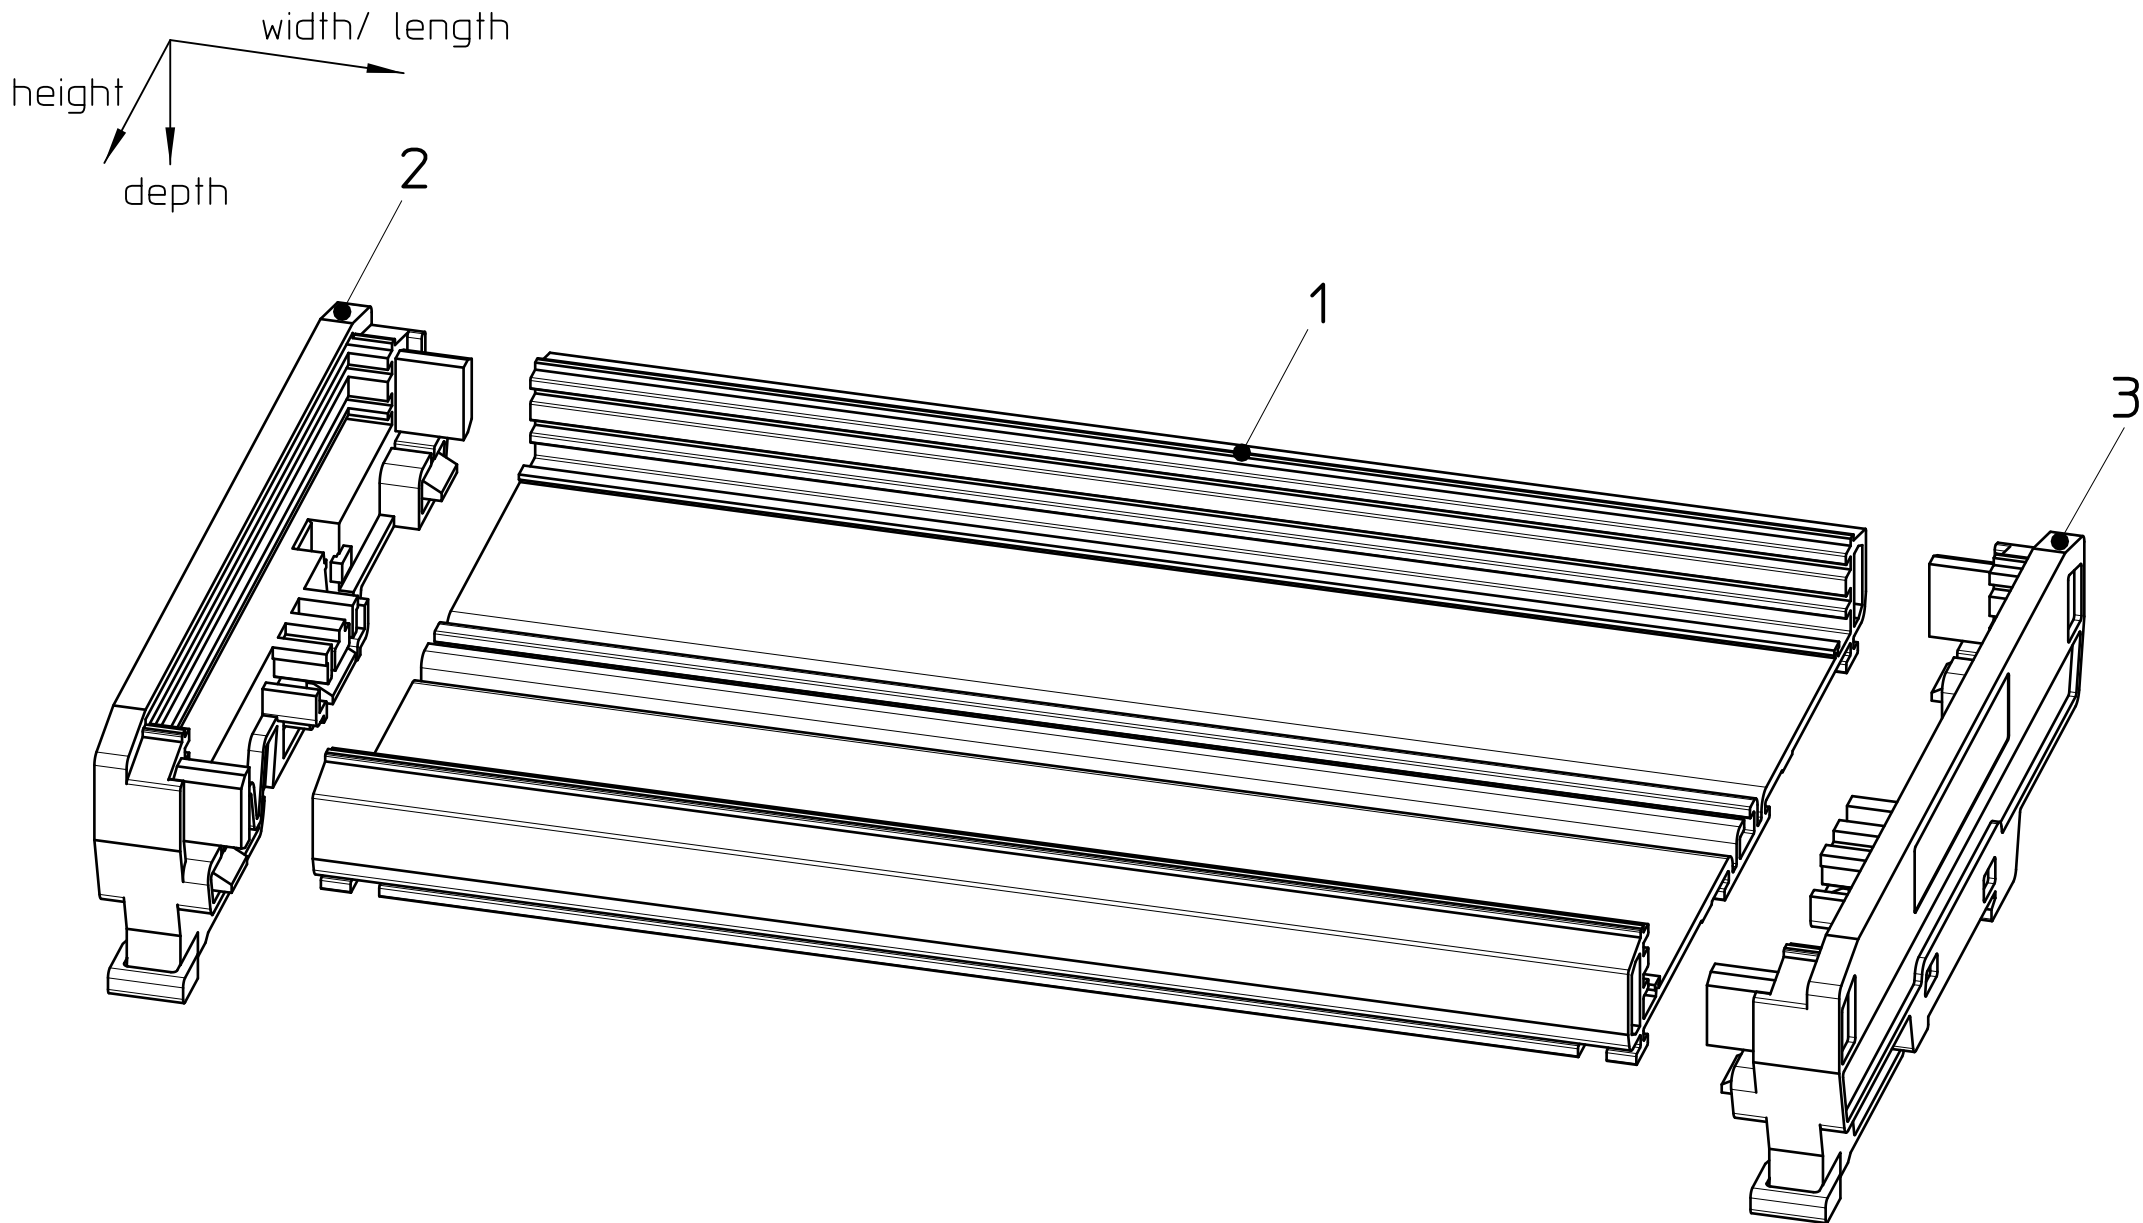


Profile

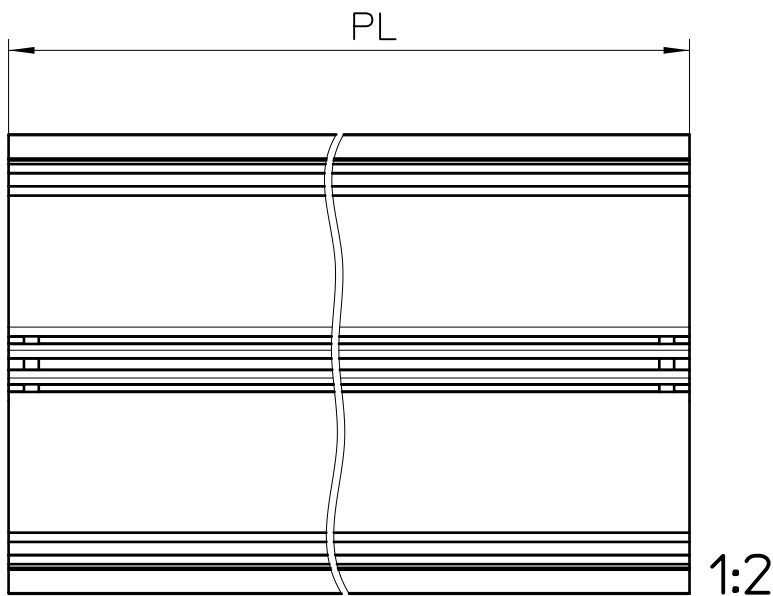

- General Information:
- Simplified representation.
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 - Web: www.phoenixcontact.com webcode: #0314
 - PCB configurator web: www.phoenixcontact.com webcode:#0512

Assembly example

(UM-PRO-KIT-B108-L200)

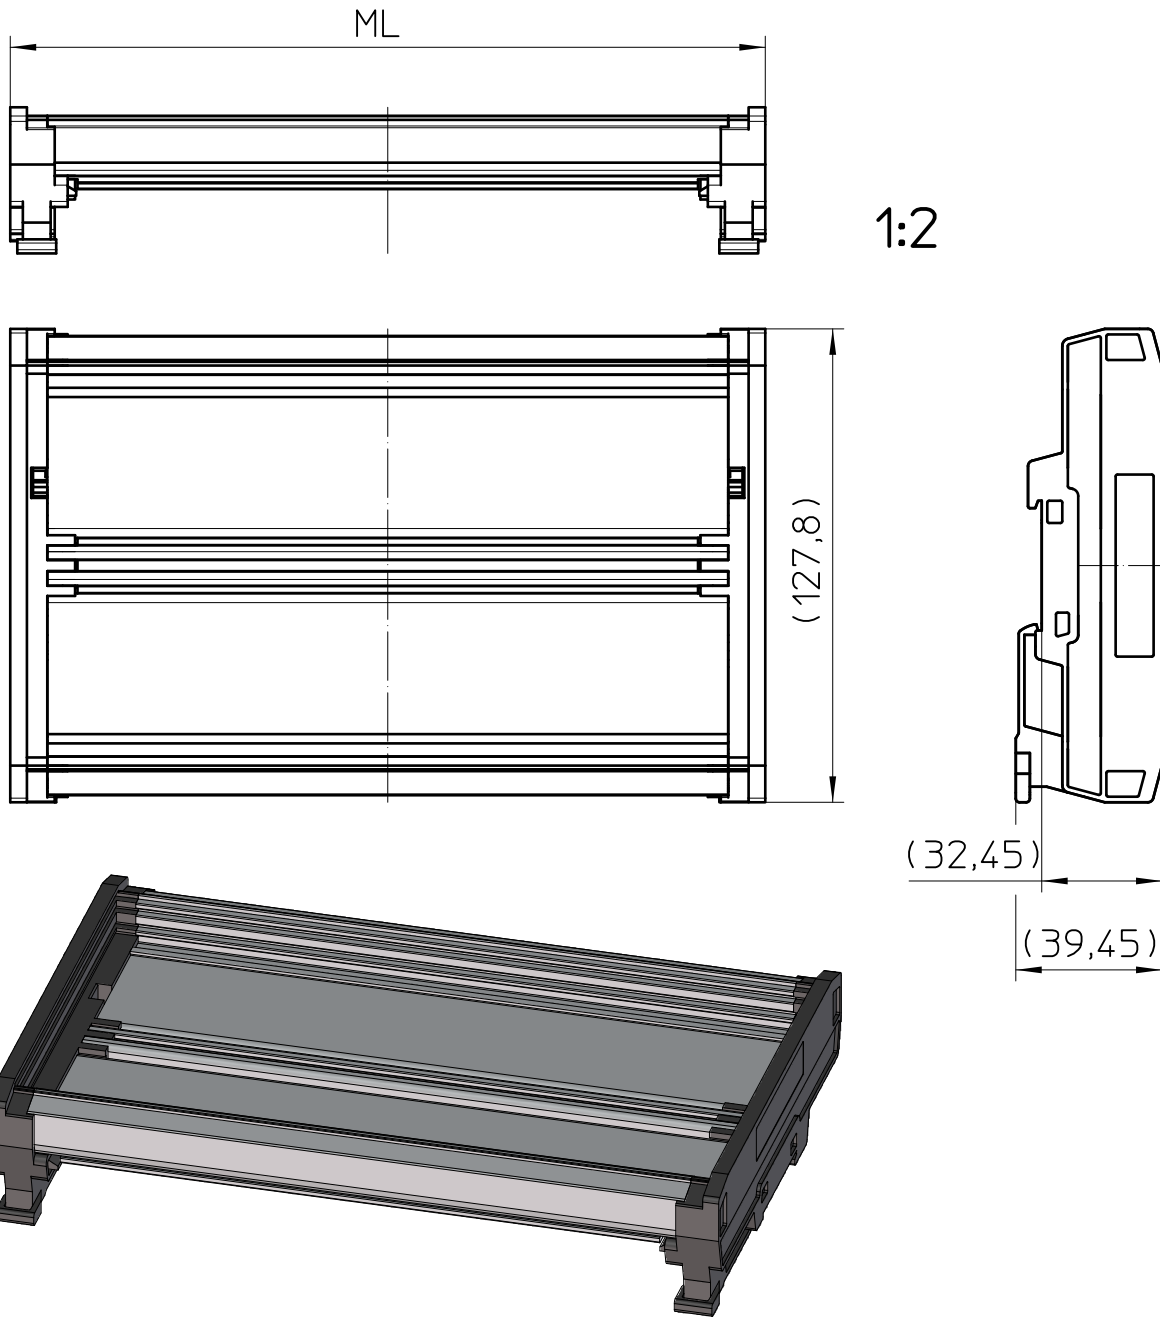

article	prolife length	modul length
	PL	ML
UM-PRO-KIT-B...-L60	(43,8)	(63,8)
UM-PRO-KIT-B...-L80	(63,8)	(83,8)
UM-PRO-KIT-B...-L100	(83,8)	(103,8)
UM-PRO-KIT-B...-L120	(103,8)	(123,8)
UM-PRO-KIT-B...-L150	(133,8)	(153,8)
UM-PRO-KIT-B...-L180	(163,8)	(183,8)
UM-PRO-KIT-B...-L200	(183,8)	(203,8)
UM-PRO-KIT-B...-L250	(233,8)	(253,8)

KIT (not mounted)					
Pos.	QTY	Description	Material		
1	1	UM-PRO PROFIL	PA		
2	1	SIDE ELEMENT LEFT	PA		
3	1	SIDE ELEMENT RIGHT	PA		
 DIN A2		document-No. / RI 01370802 / 00	date 02.08.2021	scale 1:1	
		ident.-No. 1310941	document-type TECDOC 2D_Productdrawing		
page 1		of 6	description UM-PRO-KIT-B108-L100-7035		

A

B

C

D

E

F

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271




272

273




274

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

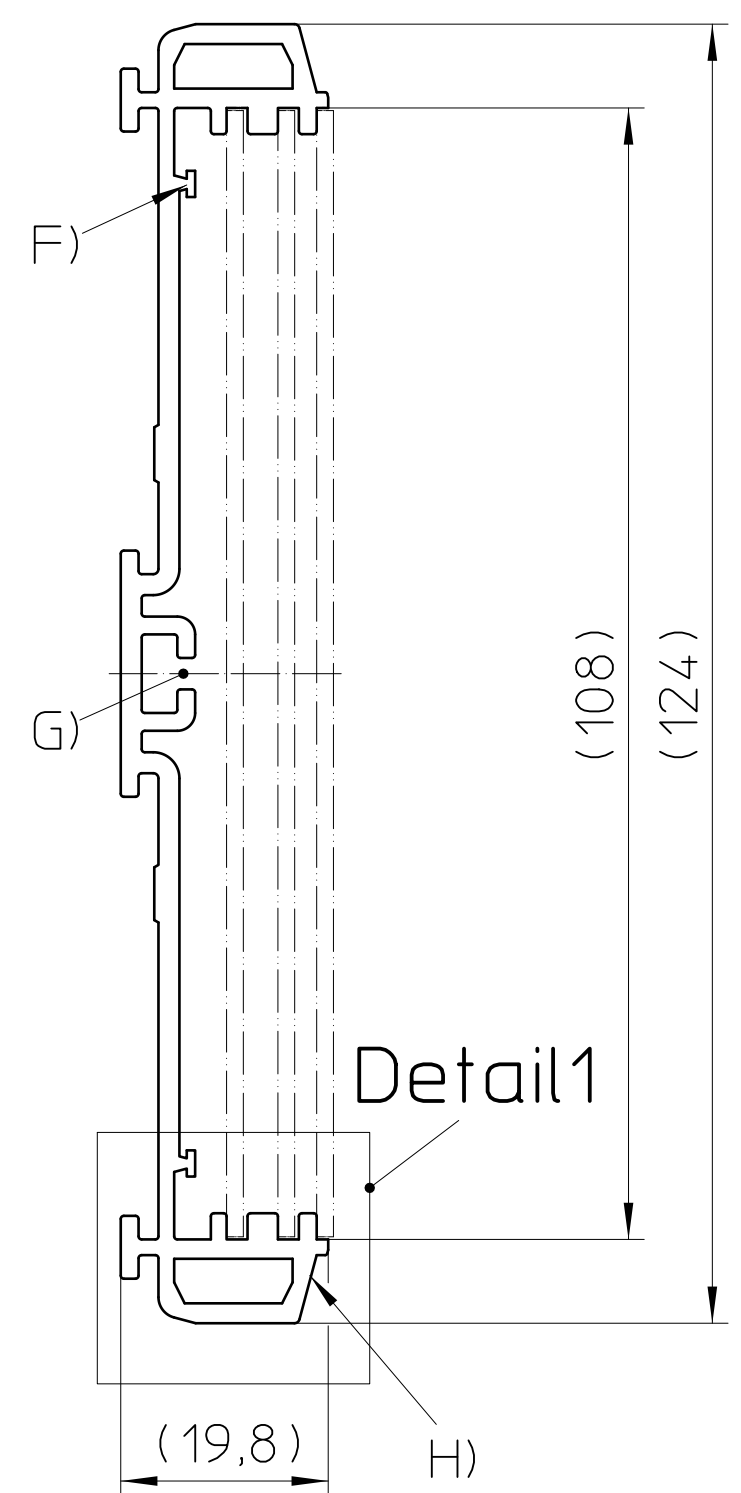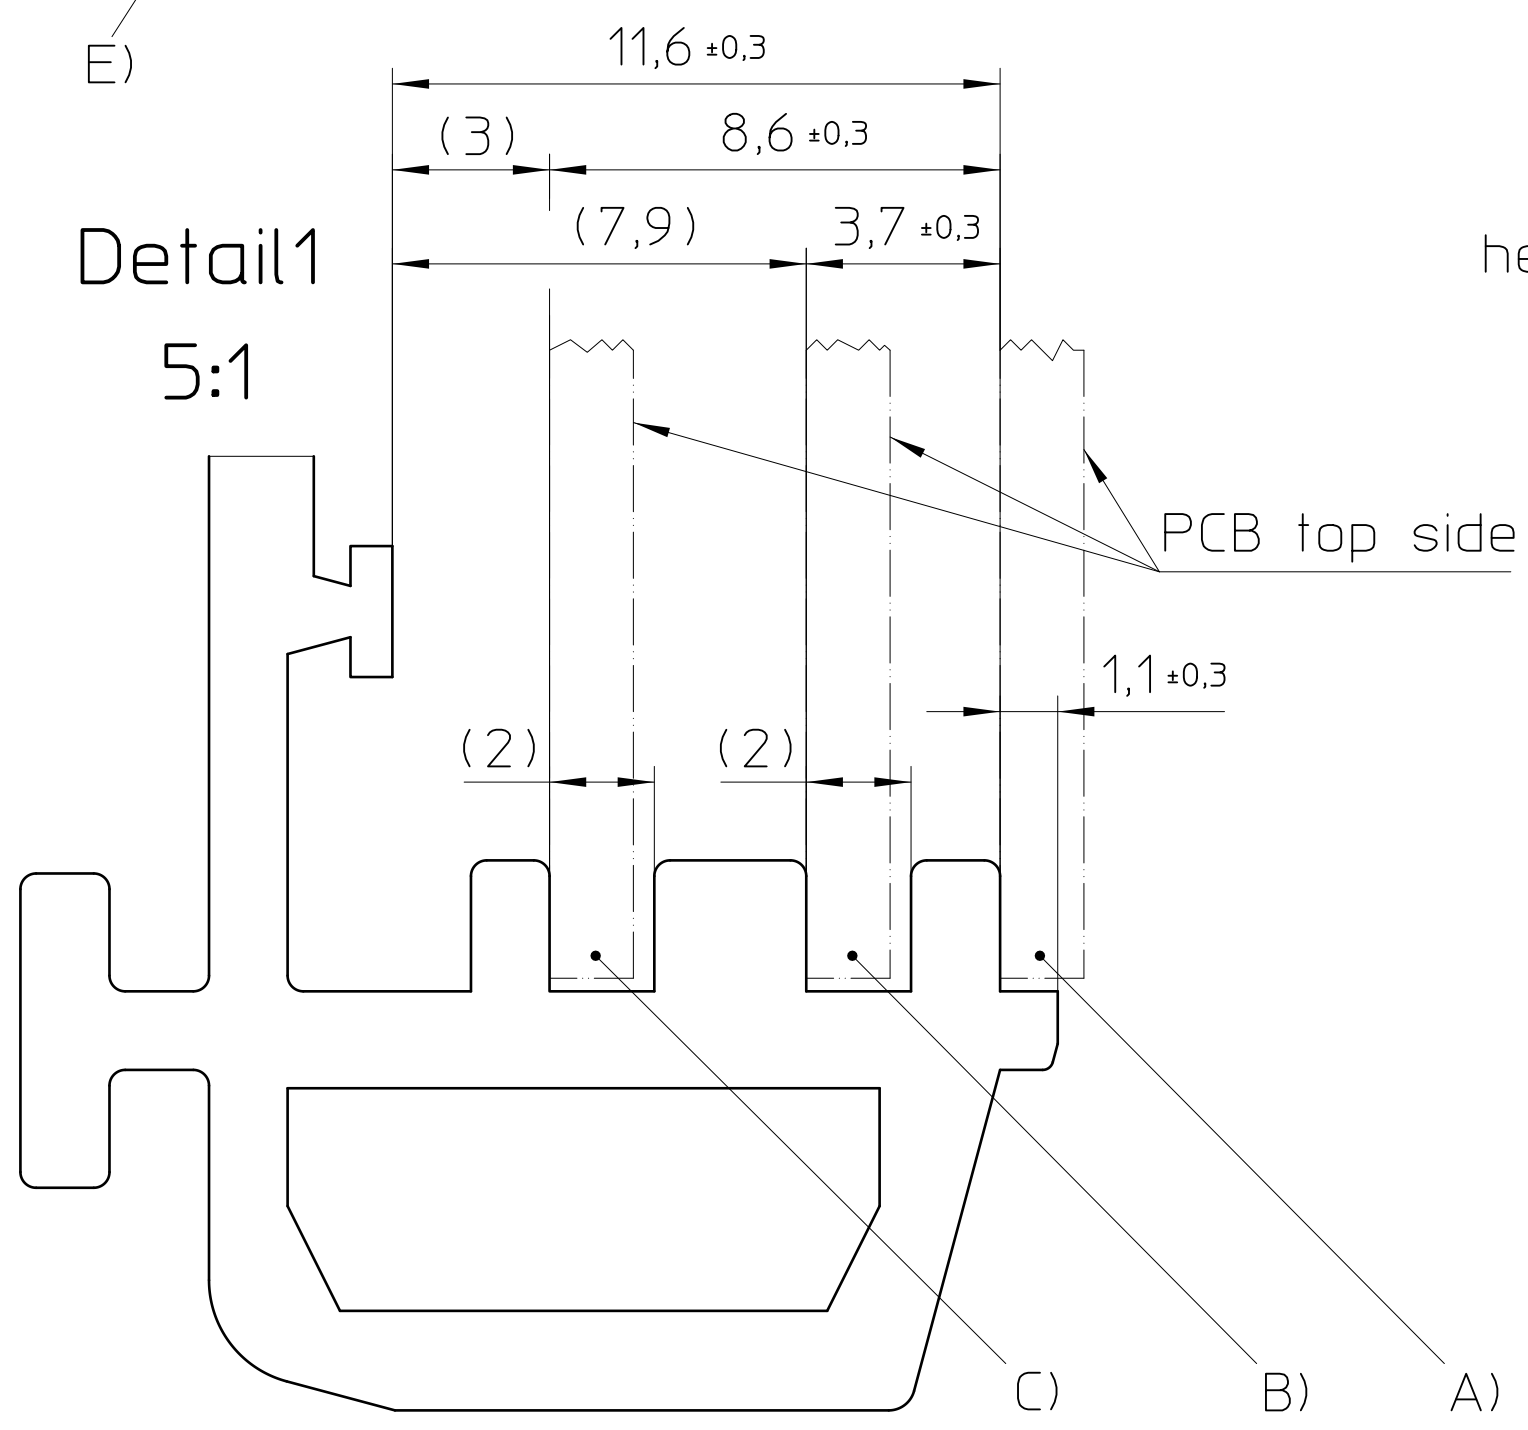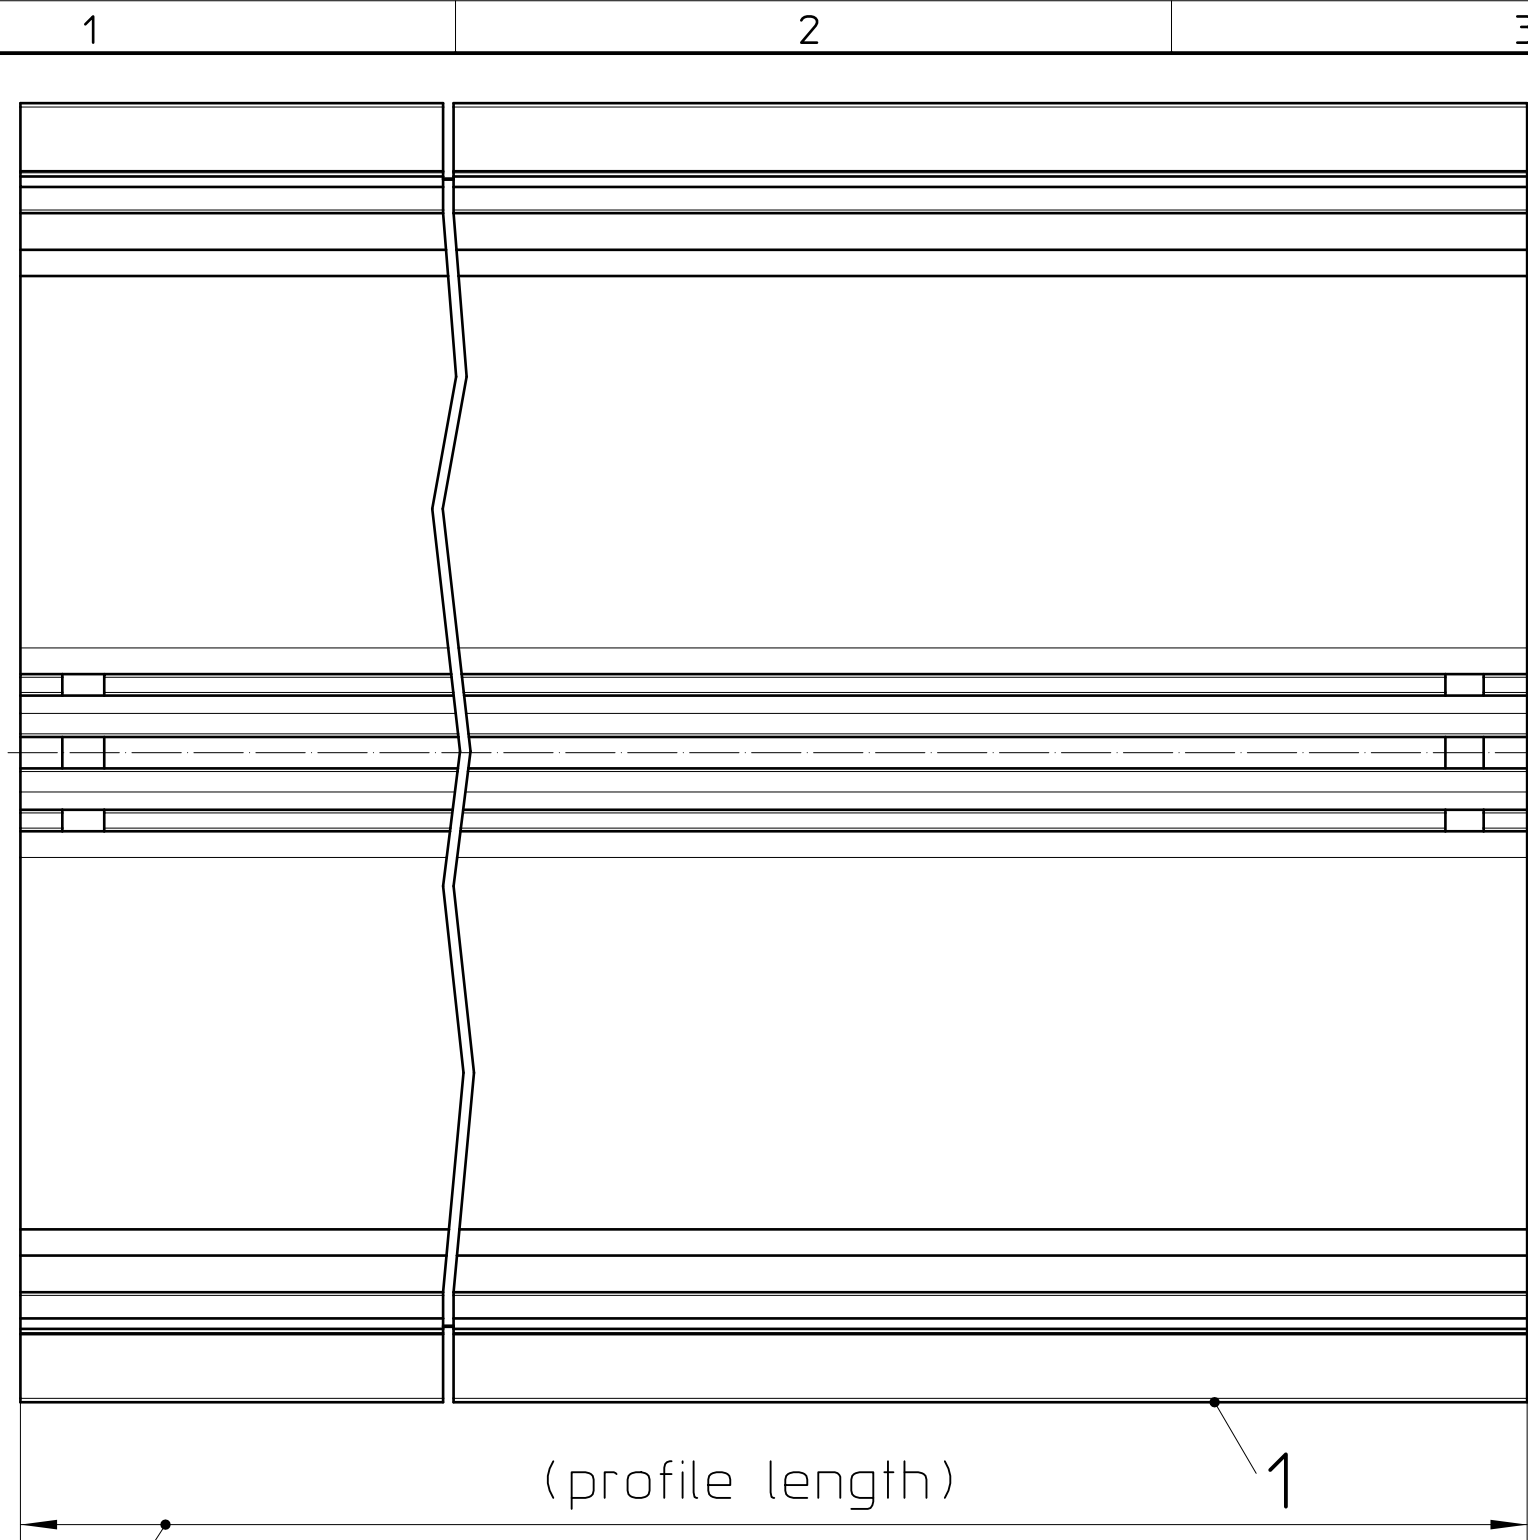

width/length
height
depth

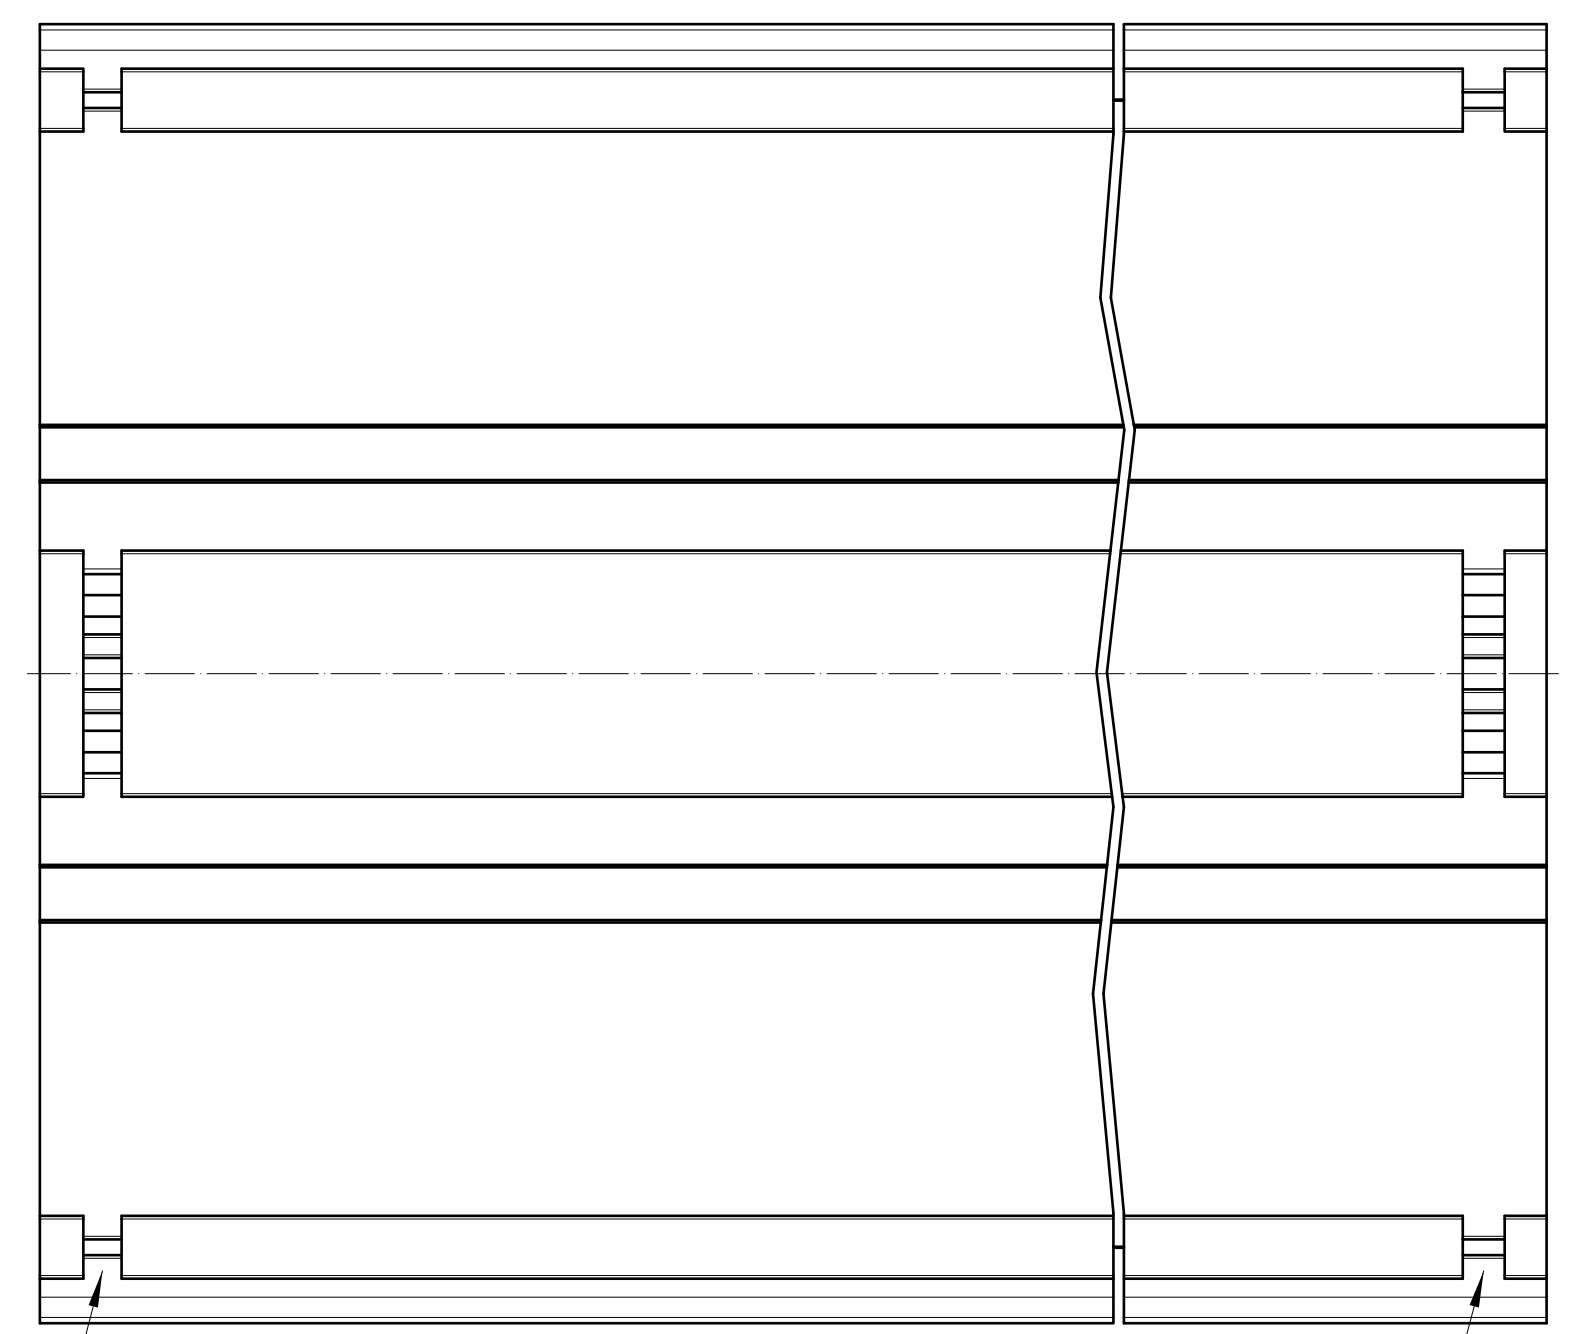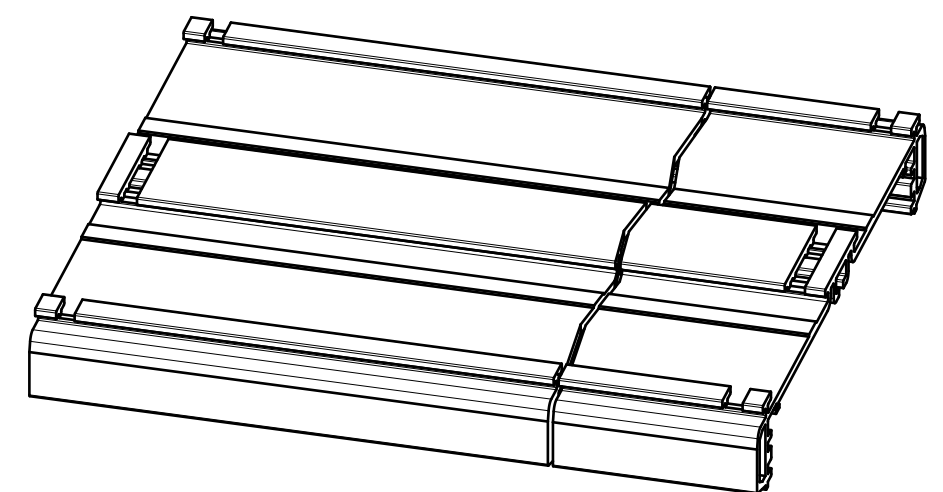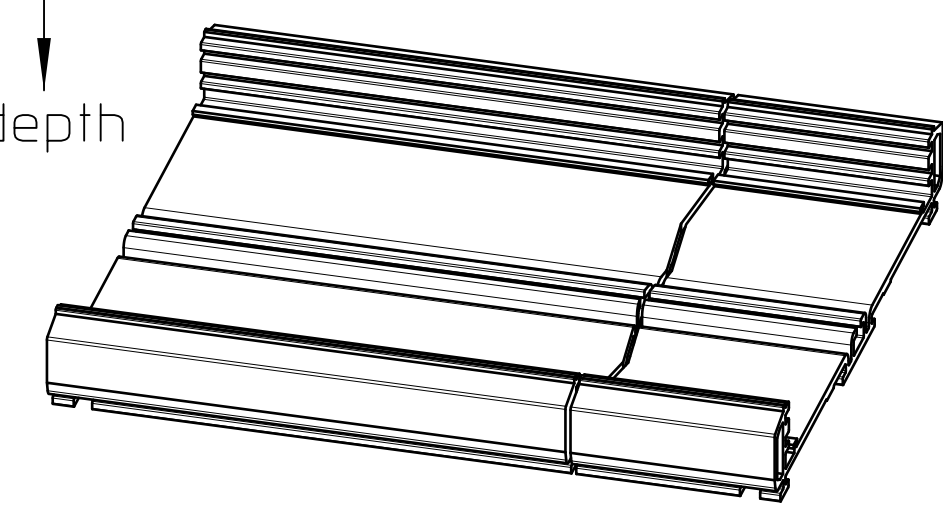


General Information

- Simplified representation
- Document excluded from change process
- Linear dimensions [mm]
- Tolerances, apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Web: www.phoenixcontact.com webcode: #0313





Additional Information:

- A) PCB L1
- B) PCB L2
- C) PCB L3
- D) Groove to fix the lateral element, UM-PRO COVER L/R
- E) Length of profile according to customer specification. Profil length min. 30mm up to max. 1000mm
- F) Fixing for optional PCB S-LOCK
- G) Fixing for optional PCB C-LOCK L ...
- H) Area for optional marking strip SK 5,0...


- Recommended PCB-outline see further documentation

Pos.	QTY	description		material	
1	1	PROFILE		PA	
 DIN A3		document-No. / RI		date	scale
		01370802 / 00		02.08.2021	1:1
		ident.-No.	document-type		
		1310941	TECD0C 2D_Productdrawing		
		description			
page 2		of 6			
		UM-PRO-KIT-B108-L100-7035			

Recommended PCB for: UM-PRO 108 and UM-BASIC 108

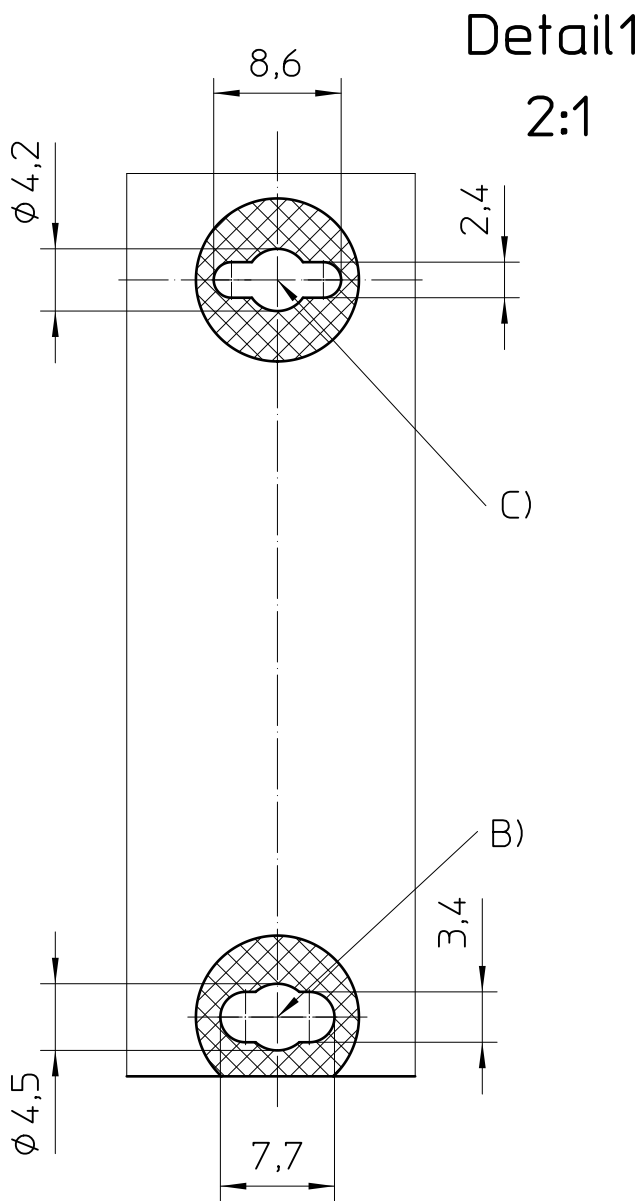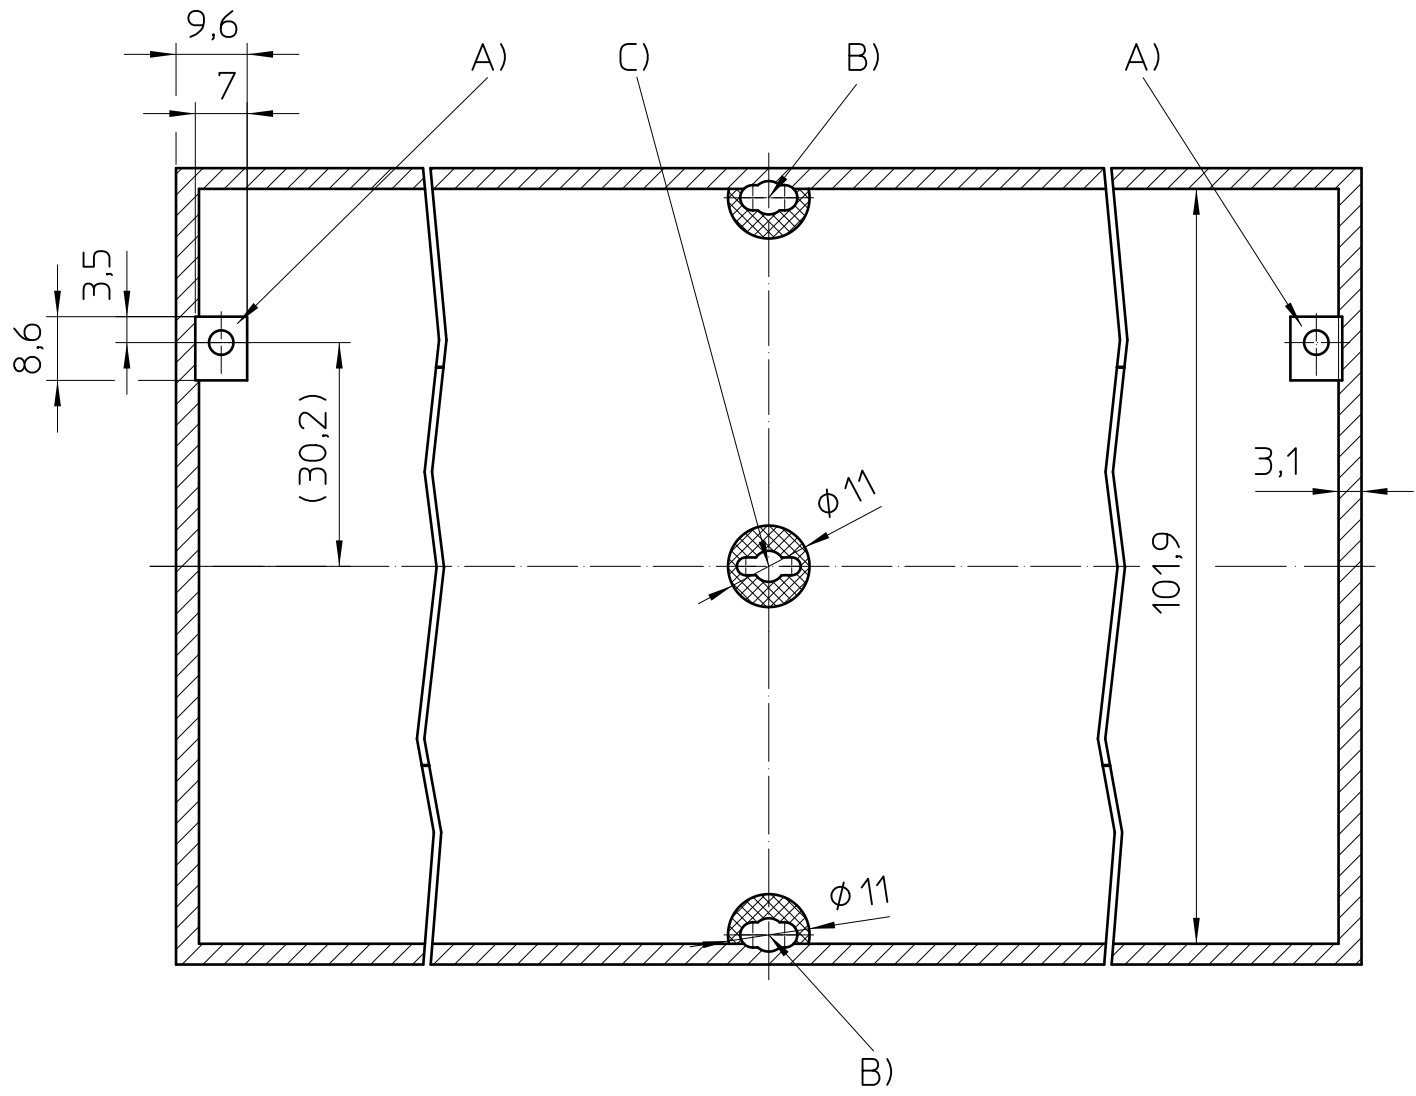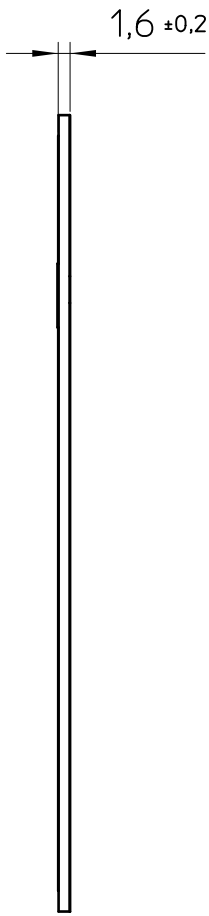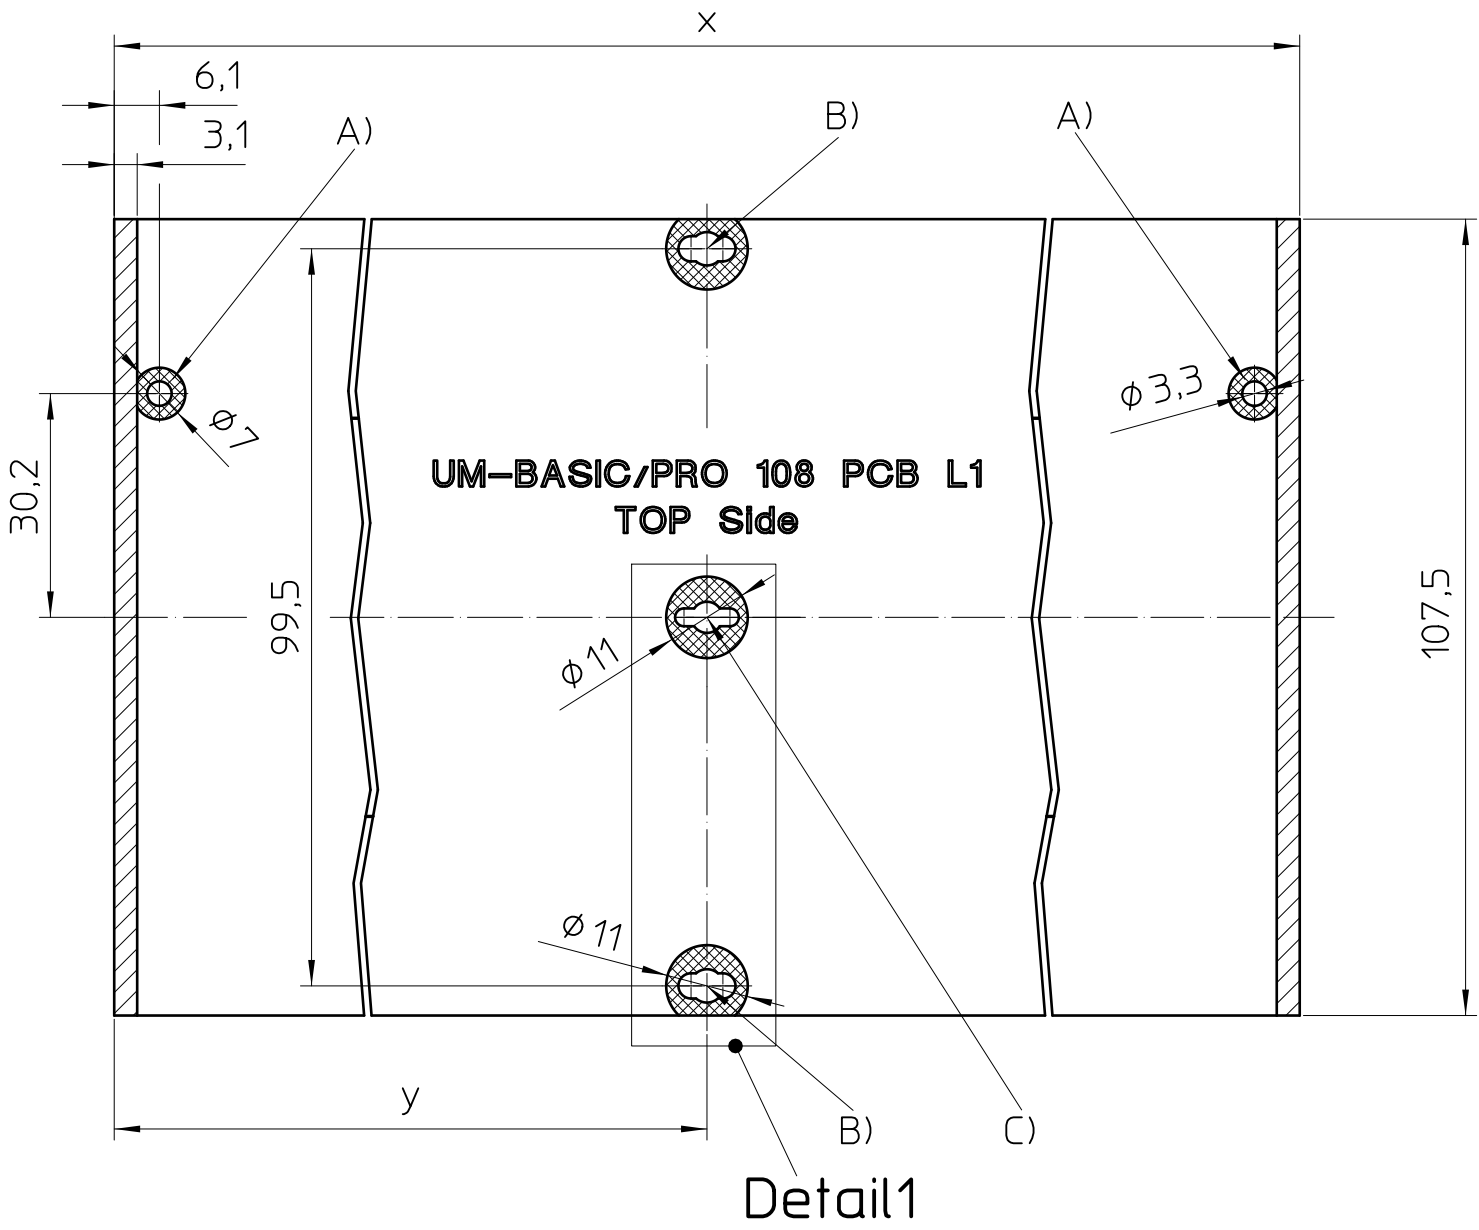

- General Information:
- Simplified representation
 - Document excluded from change process
 - Linear dimensions [mm]
 - Web: www.phoenixcontact.com webcode: #0314 / #0313


- Addition Information
- General tolerances for PCB: dimensions ≤ 30 : $\pm 0,1/R \pm 0,2/\pm 1^\circ$
dimensions > 30 : $\pm 0,15/R \pm 0,2/\pm 1^\circ$
symmetry: 0,2
 -  Restricted area, no components
 -  Restricted area, optional

- Additional Information:
- A) Optional drilling hole, restricted area and recommended Sn-plated pad for UM-PRO PE CONTACT L1
 - B) Optional cutout and restricted area for UM-PRO PCB S-LOCK
 - C) Optional cutout and restricted area for UM-PRO PCB C-LOCK L1
- X: PCB length (profile length=X-16,2 ; module length=X+3,8)
- Y: Position of optional cutouts with restricted areas ; Range: Y=8,6...(X-8,6)

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.



Recommended PCB for: UM-PRO 108 and UM-BASIC 108

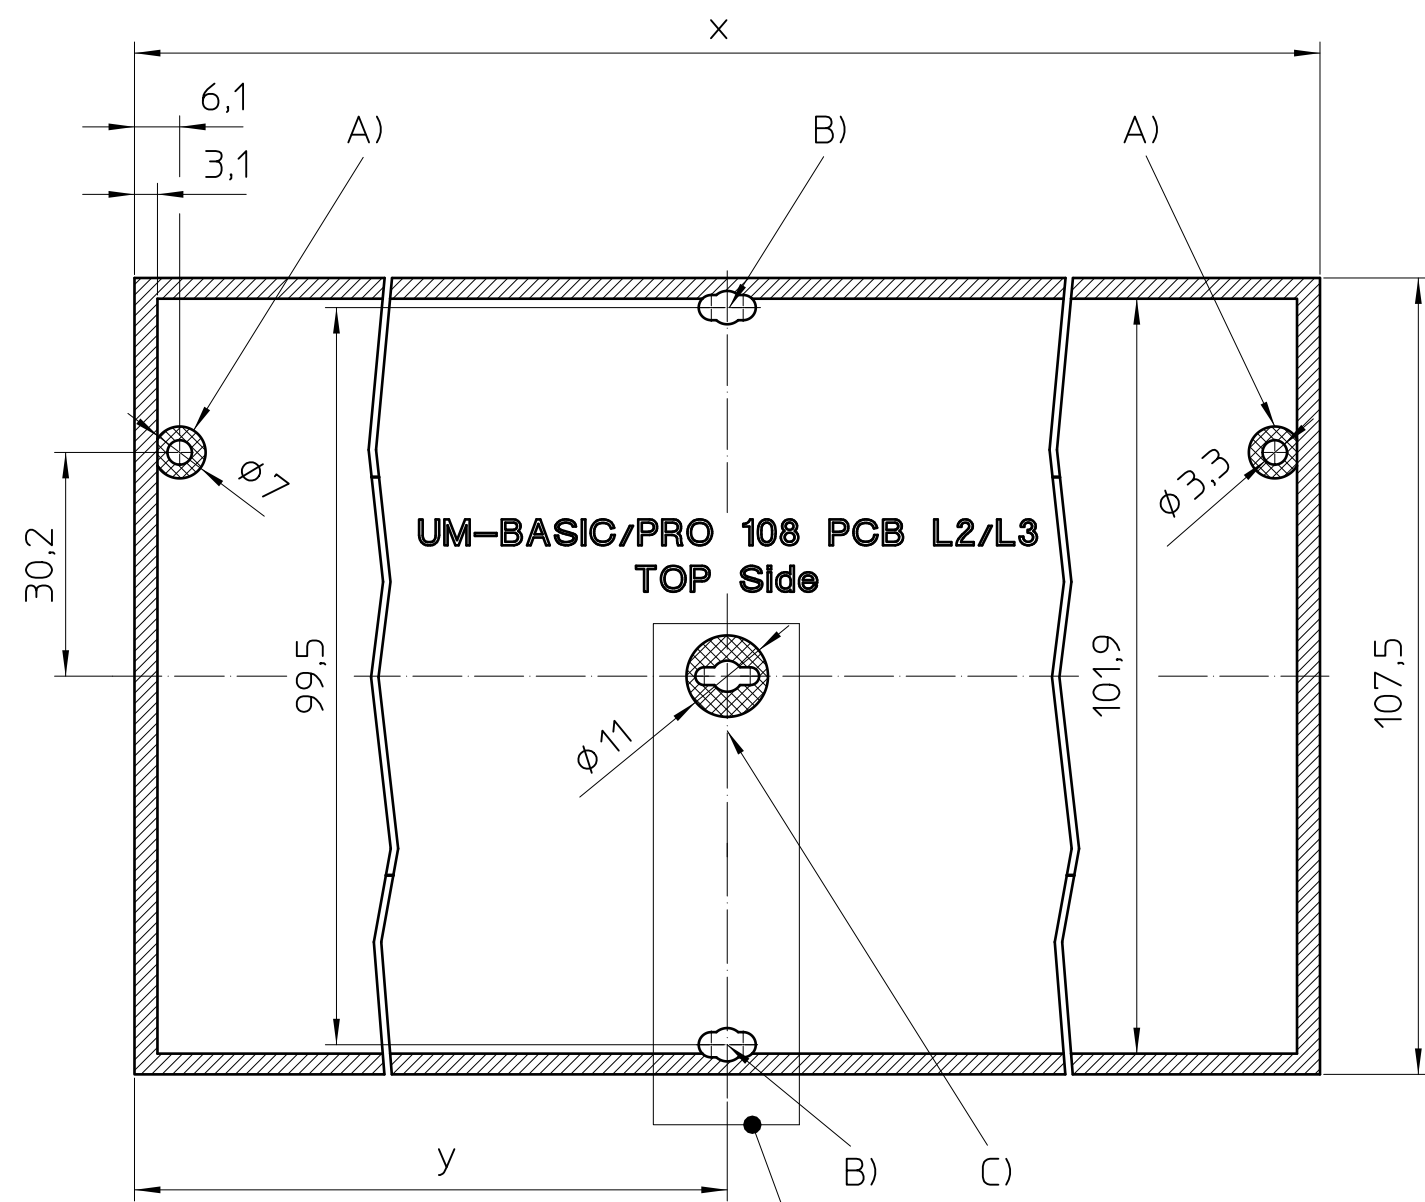

Detail1

Detail1

2:1

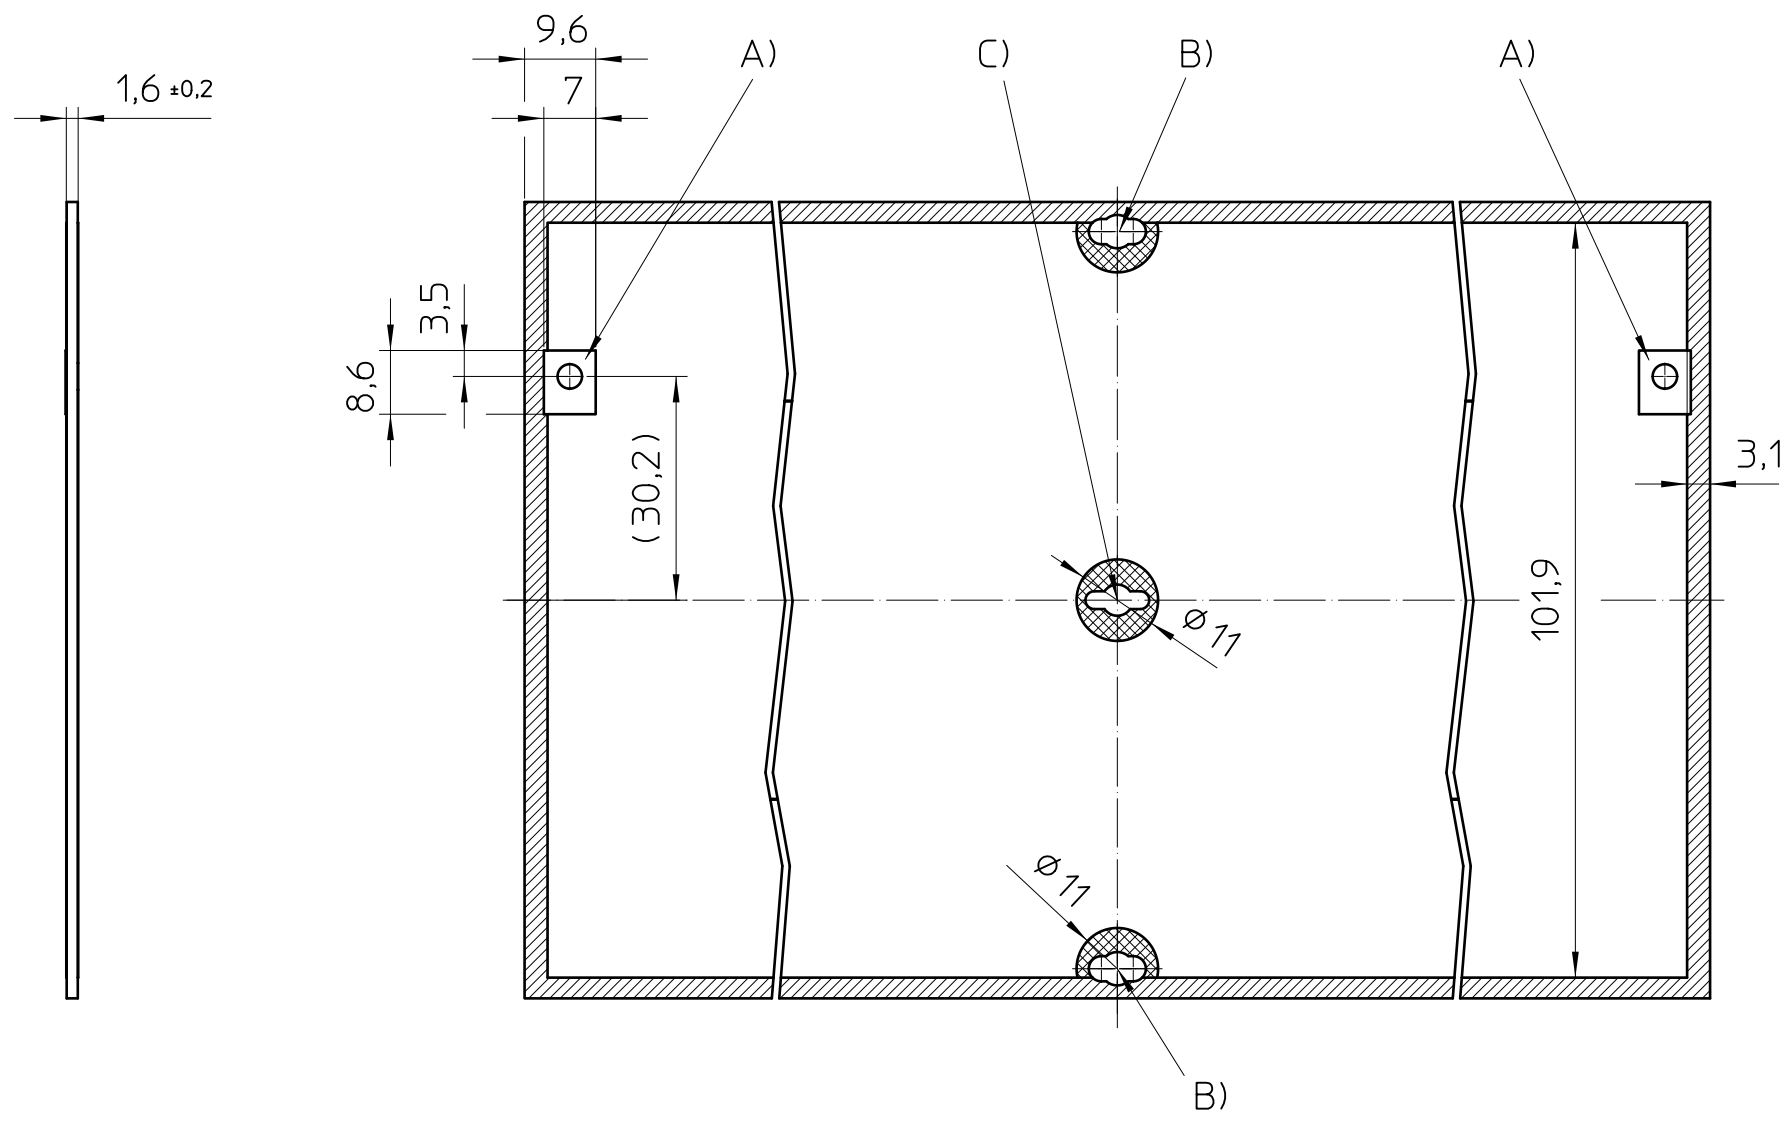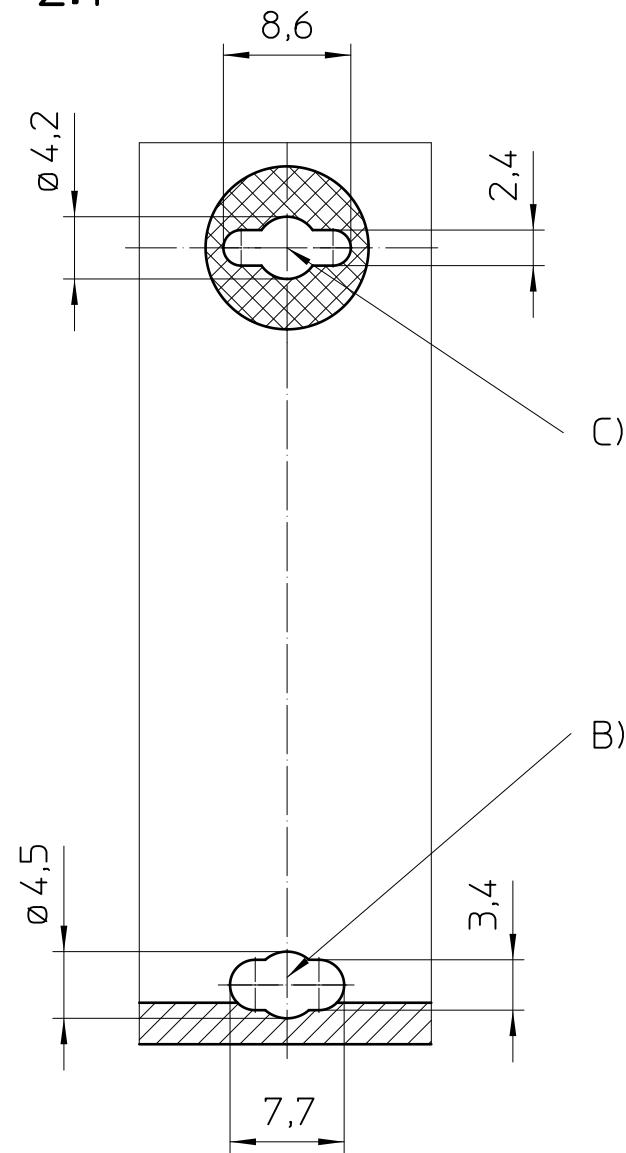


General Information:

- Simplified representation
- Document excluded from change process
- Linear dimensions [mm]
- Web: www.phoenixcontact.com webcode: #0313 / #0314

Addition Information

- General tolerances for PCB: dimensions ≤ 30 : $\pm 0,1/R \pm 0,2/\pm 1^\circ$
dimensions > 30 : $\pm 0,15/R \pm 0,2/\pm 1^\circ$
symmetry: 0,2

-  Restricted area, no components



-  Restricted area, optional

Additional Information:

- A) optional drilling hole, restricted area and recommended Sn-plated pad for UM-PRO PE CONTACT L2/L3
- B) optional cutout and restricted area for UM-PRO PCB S-LOCK
- C) optional cutout and restricted area for UM-PRO PCB C-LOCK L2/L3
- X: PCB length (profile length=x-16,2 ; module length=x+3,8)
- Y: Position of optional cutouts with restricted areas ; Range: $y=8,6...(x-8,6)$

 DIN A2	document-No. / RI 01370802 / 00	date 02.08.2021	scale 1:1
	ident.-No. 1310941	document-type TECDOC 2D_Productdrawing	
page 4 of 6	description UM-PRO-KIT-B108-L100-7035		



Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

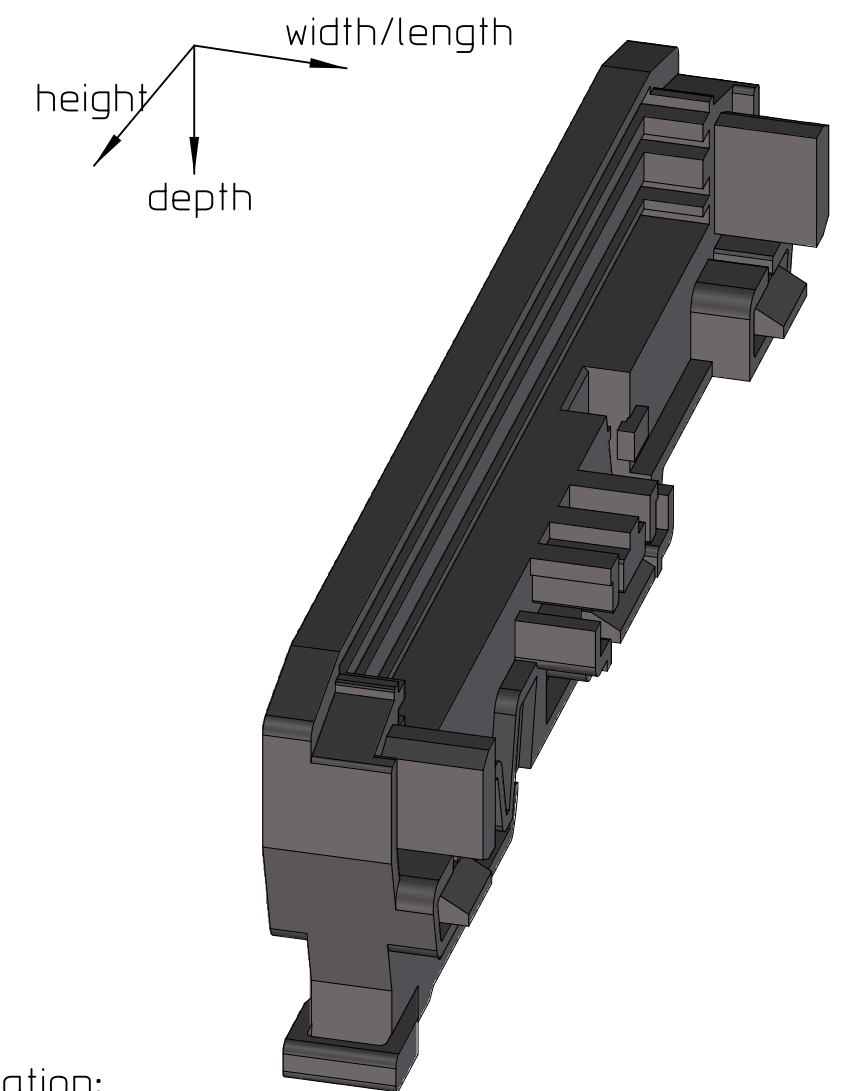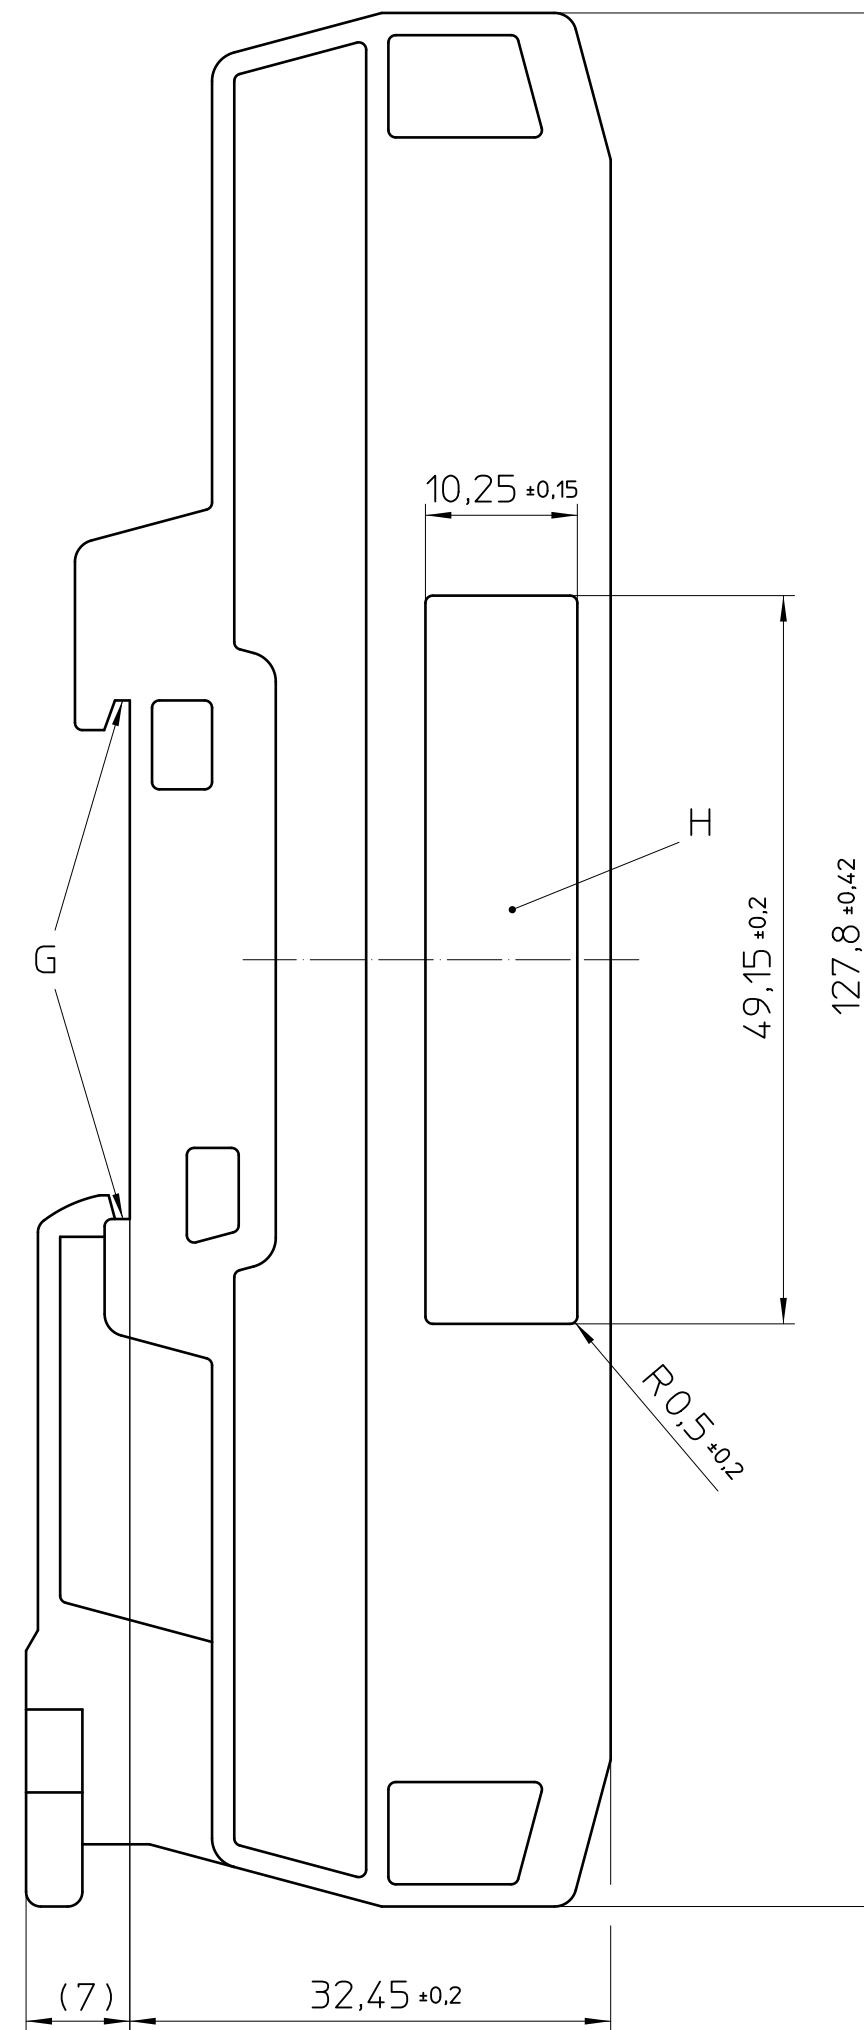

- Simplified representation
- Document excluded from change process
- Linear dimensions [mm]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Workpiece zero point for mechanical processing
- Tolerances for mechanical processing are ISO 2768-mK
- Machining radii min. R1, further on request
- Web: www.phoenixcontact.com webcode: #0313 / #0314

- A) PCB L1
- B) PCB L2
- C) PCB L3
- D) Mounting rail according to DIN EN 60715: TH 35-7,5 or
Mounting rail similar to DIN EN 60715: TH 35-15x1,5
- E) Fix point for UM-PRO PE CONTACT
- F) Fix point for UM-PRO 108 PROFILE
- G) Fix point for UM-PRO MOUNT
- H) Marking area

Pos.	QTY	description		material	F
1	1	LATERAL ELEMENT LEFT		PA	
		document-No. / RI 01370802 / 00		date 02.08.2021	scale 2:1
		ident.-No. 1310941		document-type TECDOC 2D_Productdrawing	
		description UM-PRO-KIT-B108-L100-7035			
page 5		of 6			

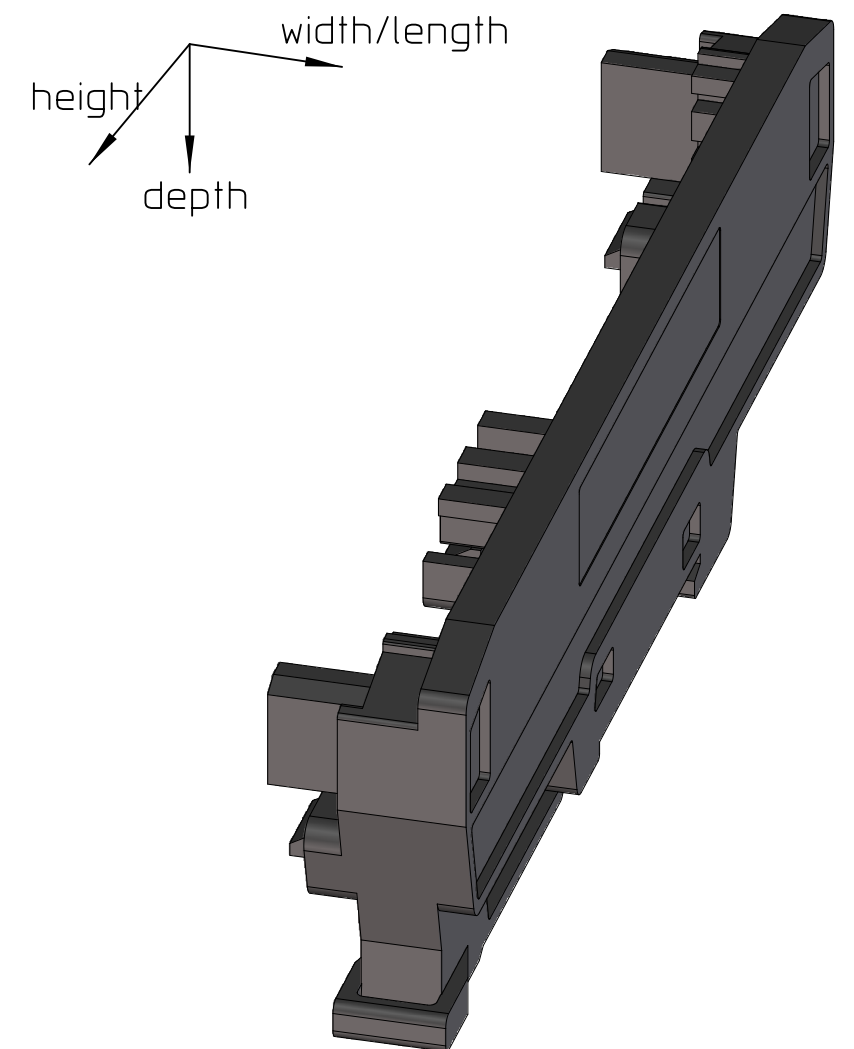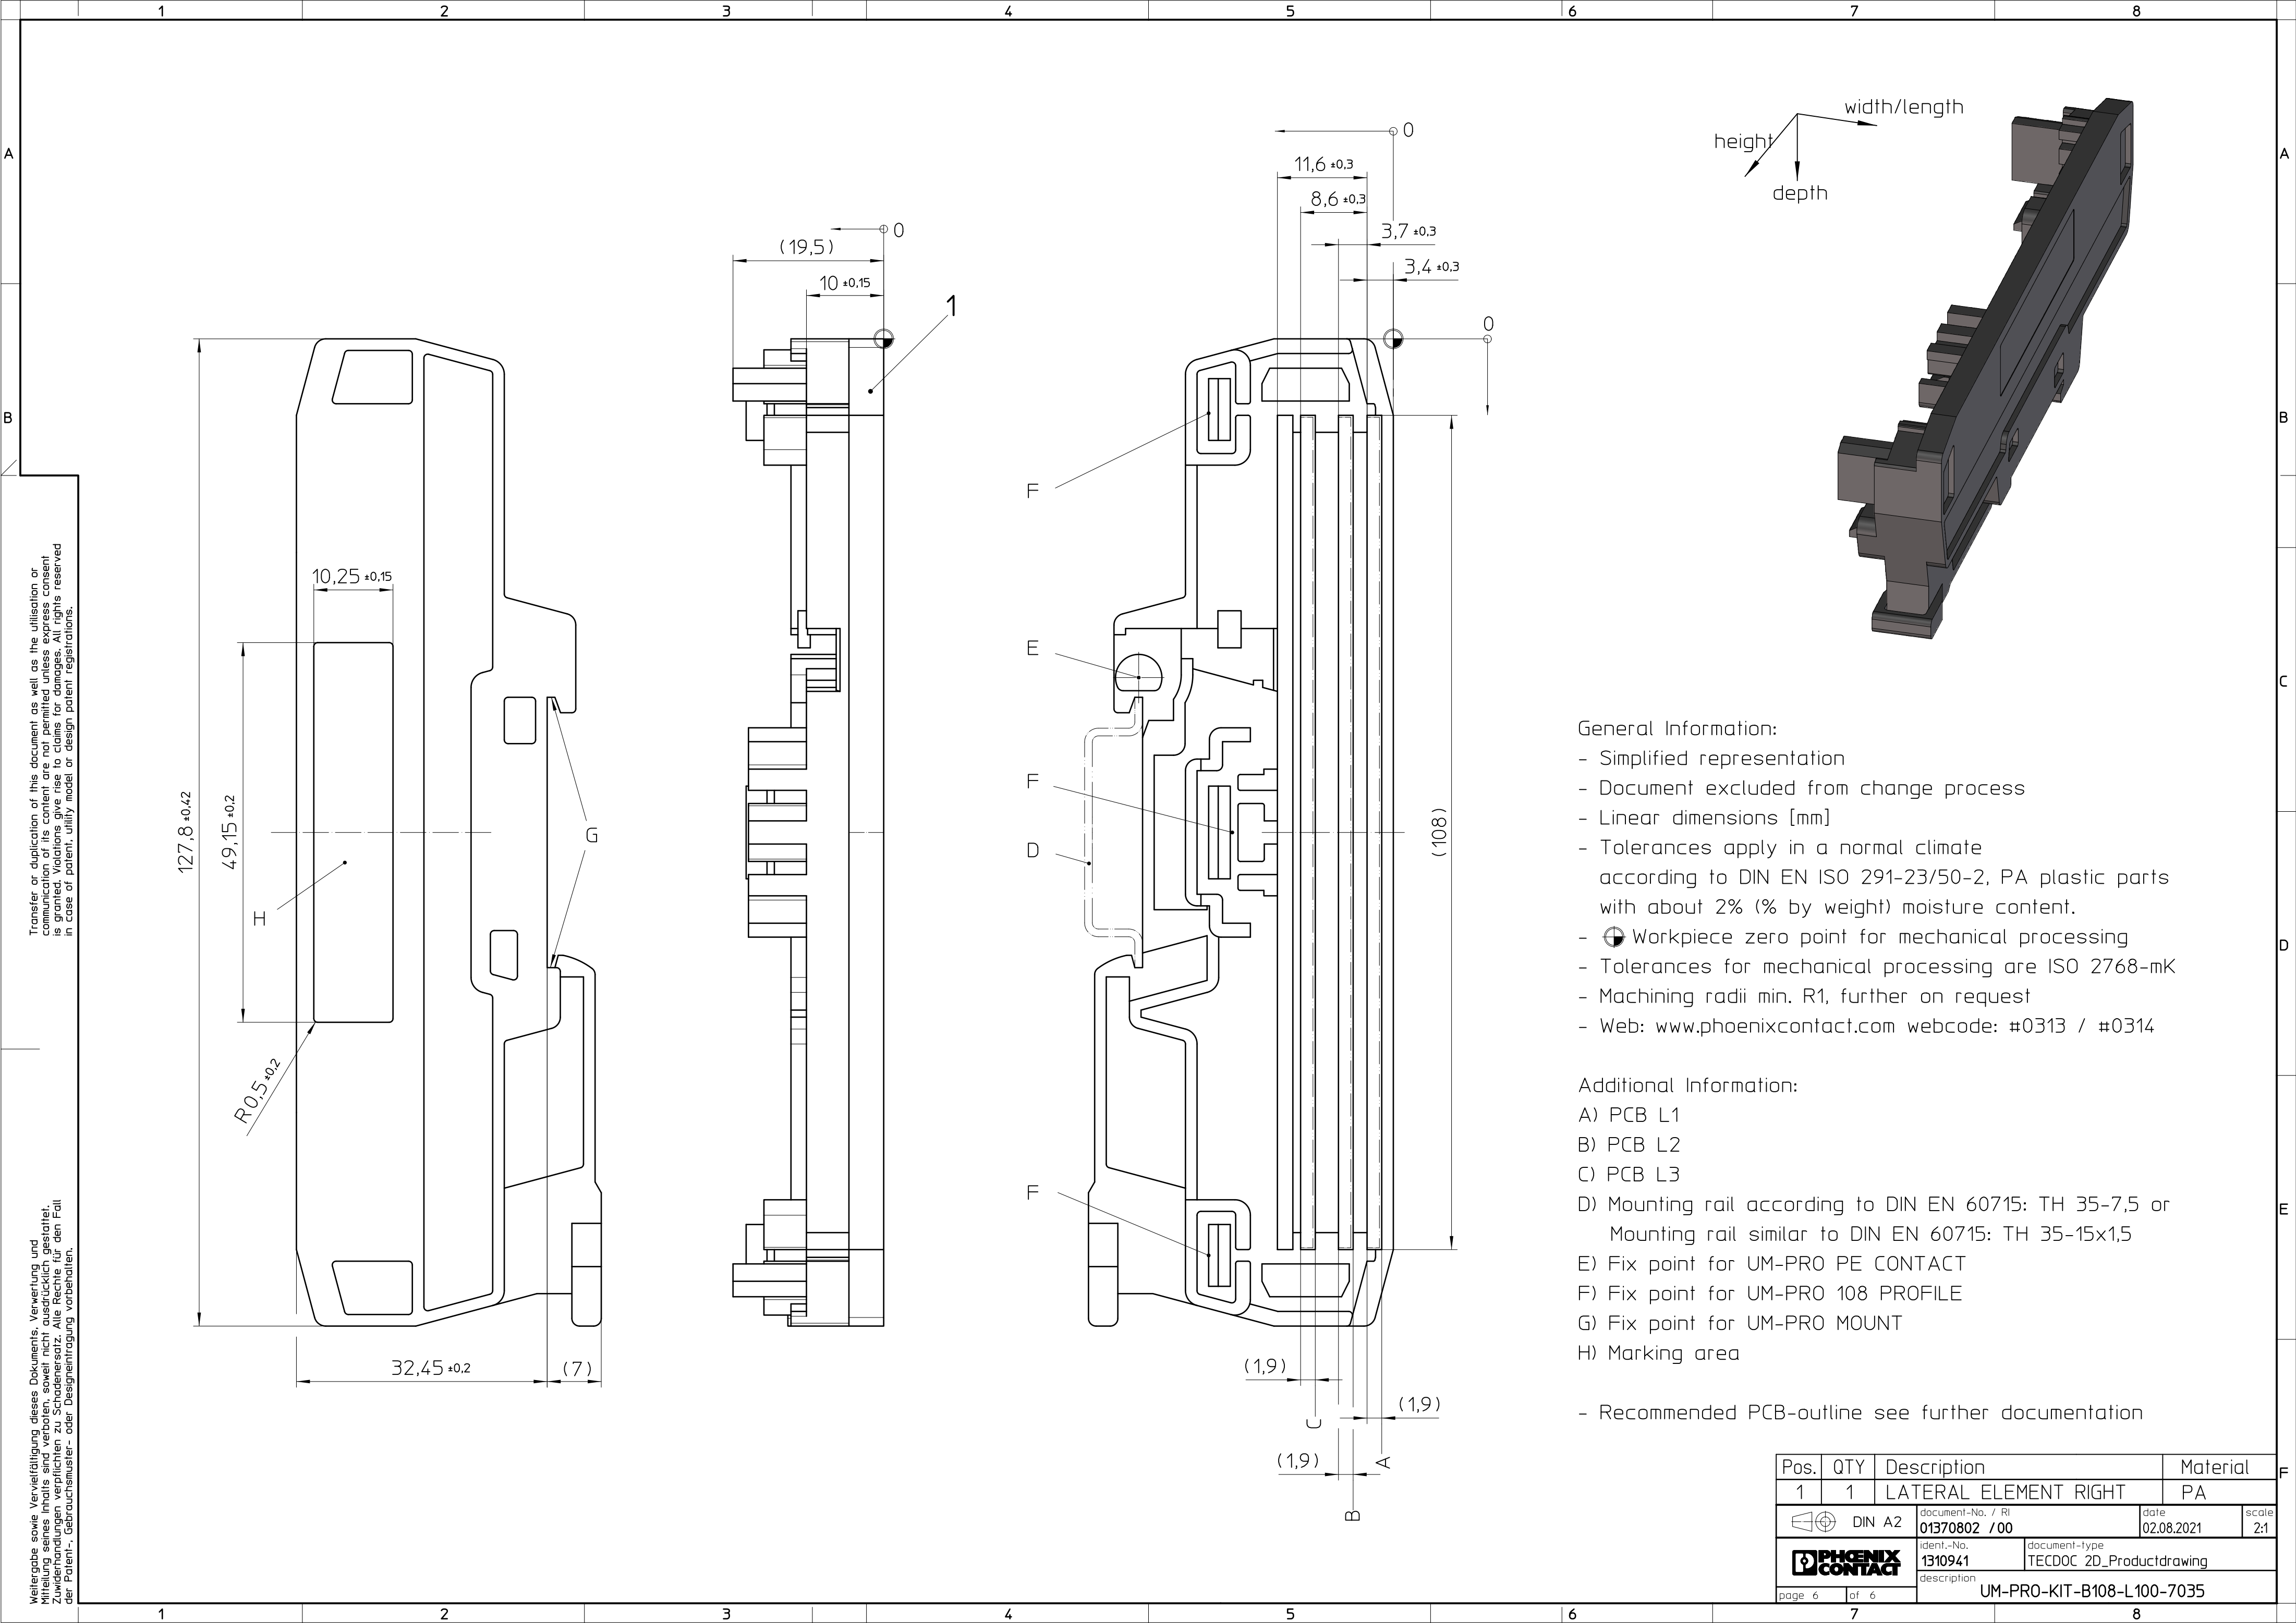

- General Information:
- Simplified representation
 - Document excluded from change process
 - Linear dimensions [mm]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing are ISO 2768-mK
 - Machining radii min. R1, further on request
 - Web: www.phoenixcontact.com webcode: #0313 / #0314

- Additional Information:
- A) PCB L1
 - B) PCB L2
 - C) PCB L3
 - D) Mounting rail according to DIN EN 60715: TH 35-7,5 or Mounting rail similar to DIN EN 60715: TH 35-15x1,5
 - E) Fix point for UM-PRO PE CONTACT
 - F) Fix point for UM-PRO 108 PROFILE
 - G) Fix point for UM-PRO MOUNT
 - H) Marking area

- Recommended PCB-outline see further documentation

Pos.	QTY	Description	Material
1	1	LATERAL ELEMENT RIGHT	PA
DIN A2		document-No. / RI 01370802 / 00	date 02.08.2021
		ident.-No. 1310941	document-type TECDOC 2D_Productdrawing
page 6 of 6		description UM-PRO-KIT-B108-L100-7035	
		scale 2:1	