

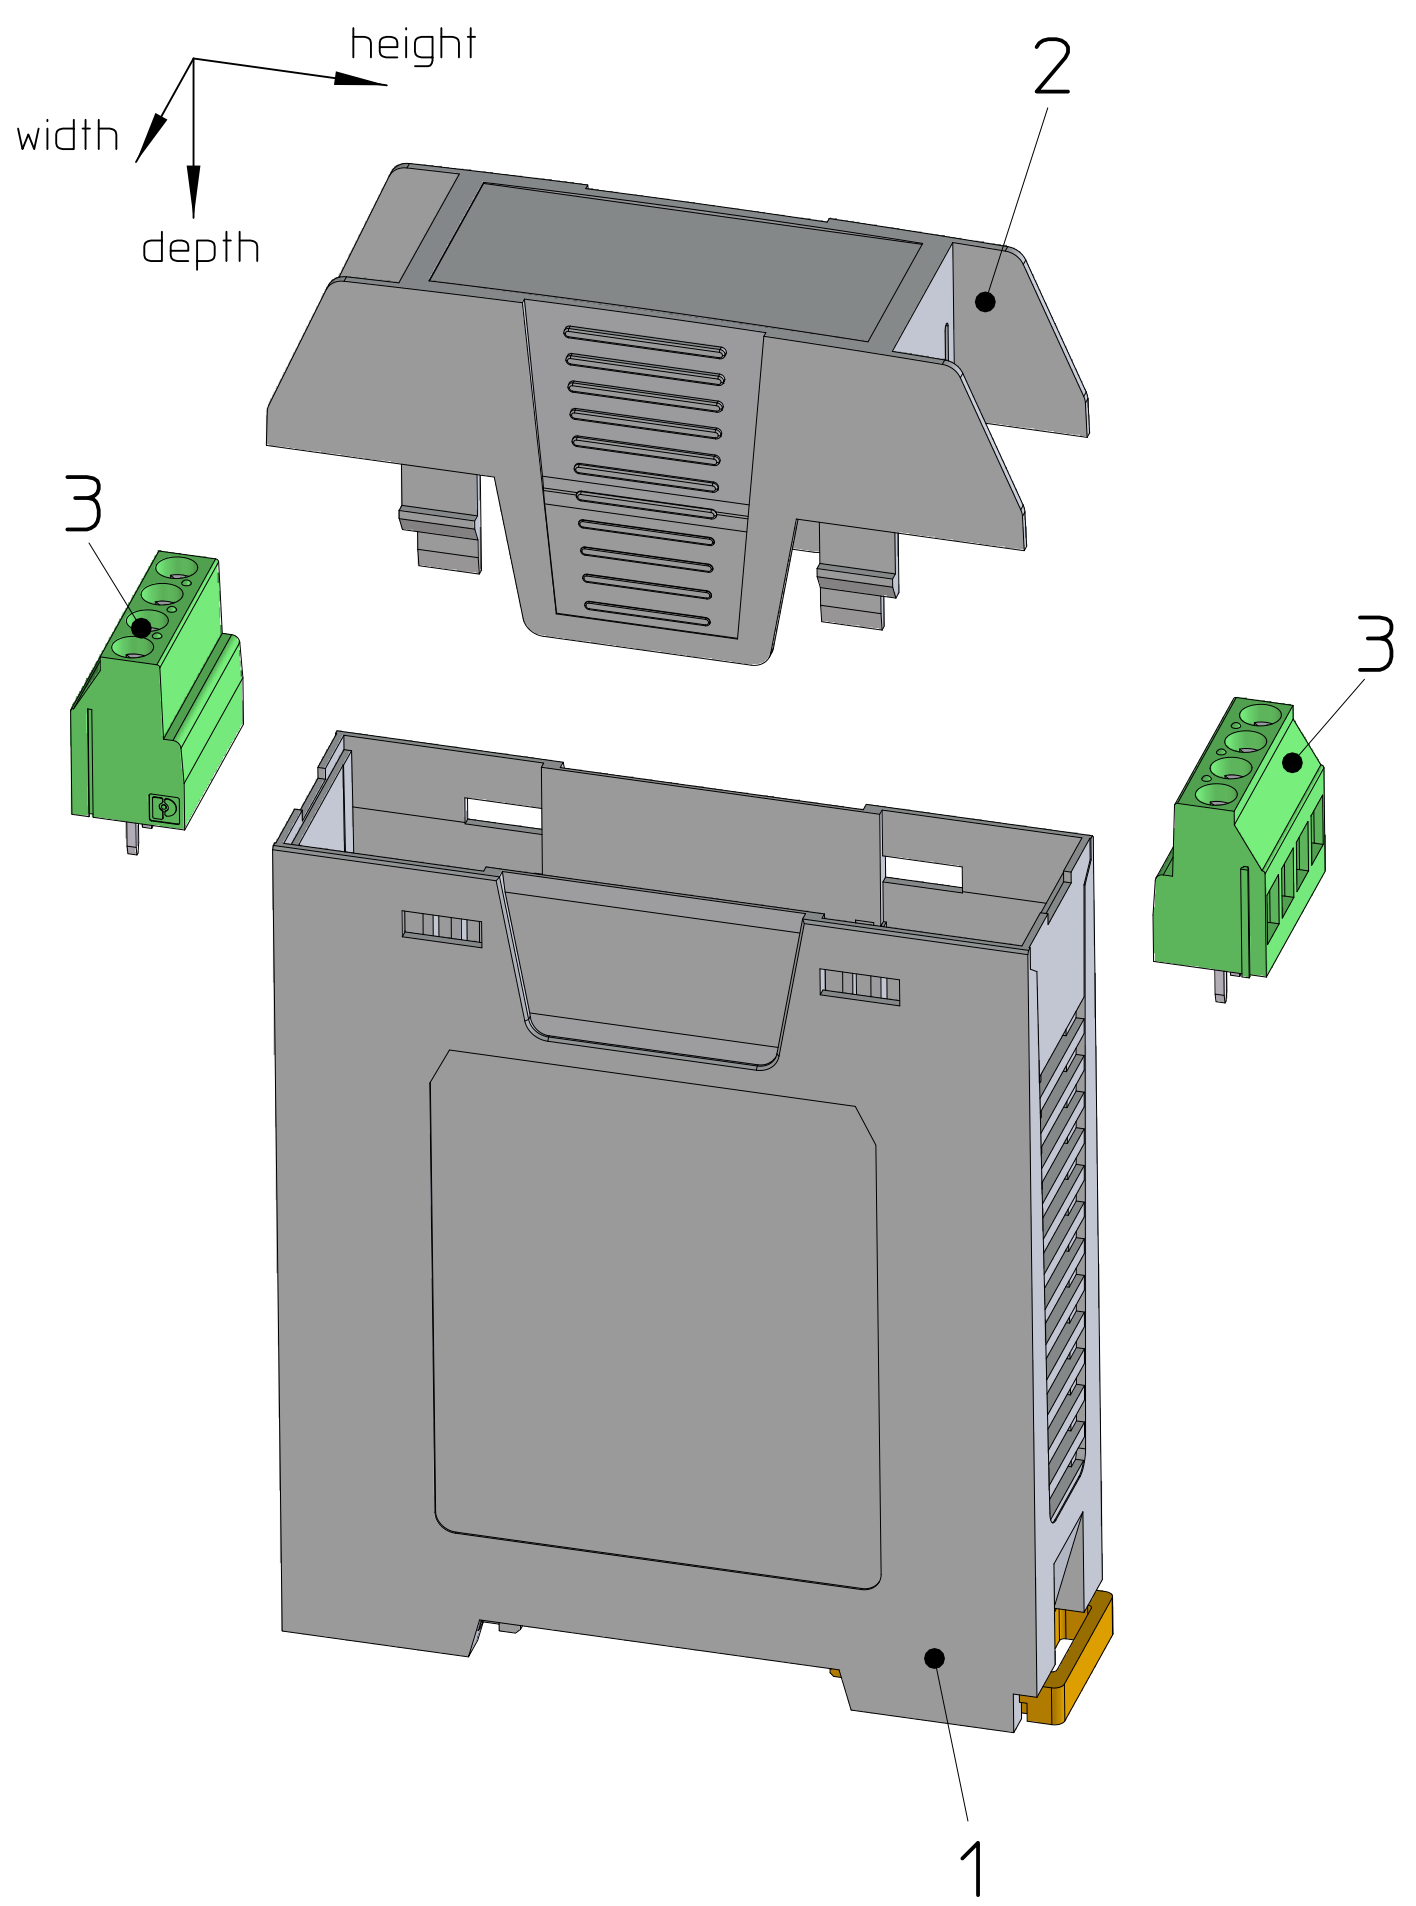


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

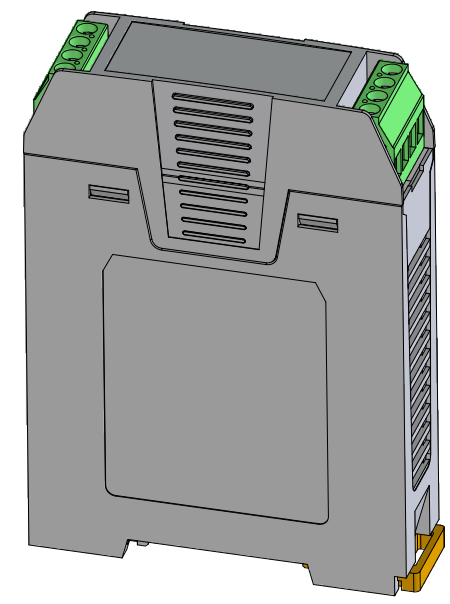

Assembly example

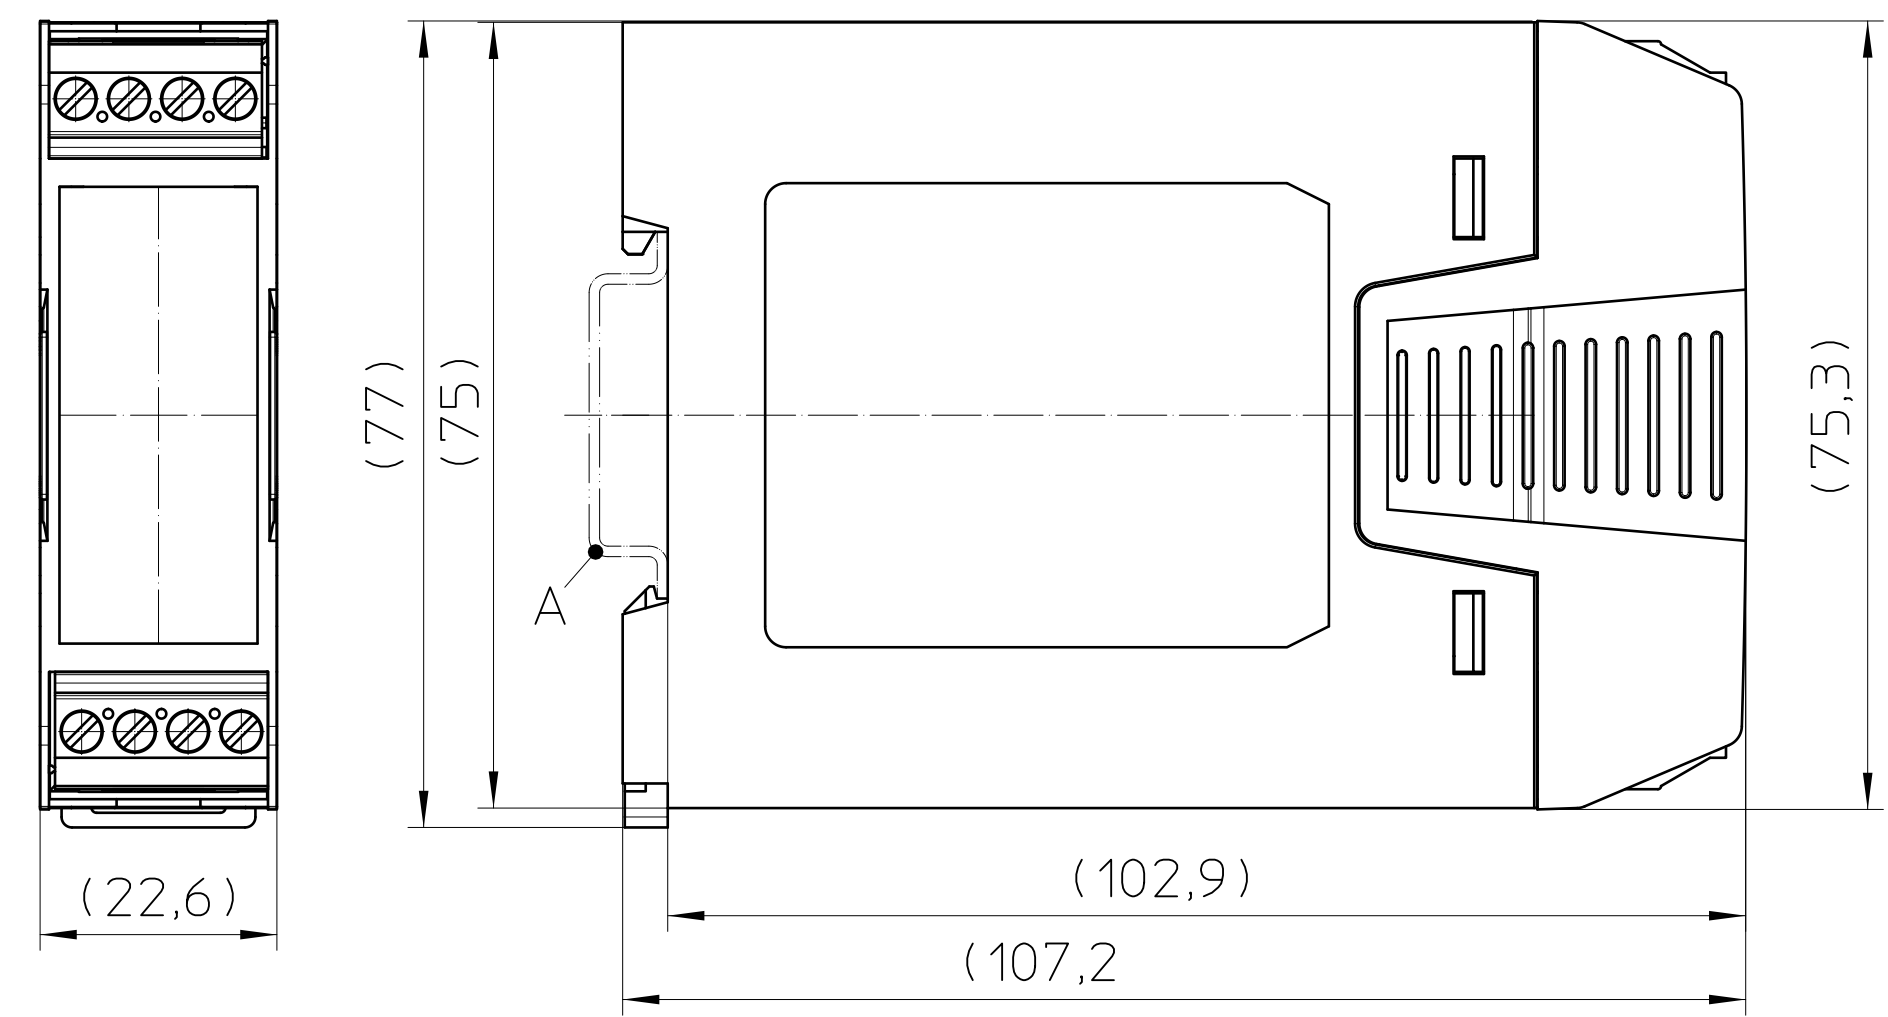

1:2


General Information:

- Simplified representation, exemplary shown in gray.
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2.
- Web: www.phoenixcontact.com webcode:#0551

Additional Information:

A. Mounting rail like EN 60715, TH 35-7,5 or
mounting rail similar to EN 60715, TH 35-15x1,5

KIT (not mounted)				
Pos.	QTY	Description		
1	1	EH 22,5-BASE with EH SNAP LOCK		
2	1	EH 22,5-COVER		
3	2	MKDS 3/ 4-5,08		
 DIN A3		document-No. / RI 01376926 / 01	date 12.07.2021	scale 1:1
		ident.-No. 1311034	document-type TECDOC 2D_Productdrawing	
page 1 of 4		description EH		





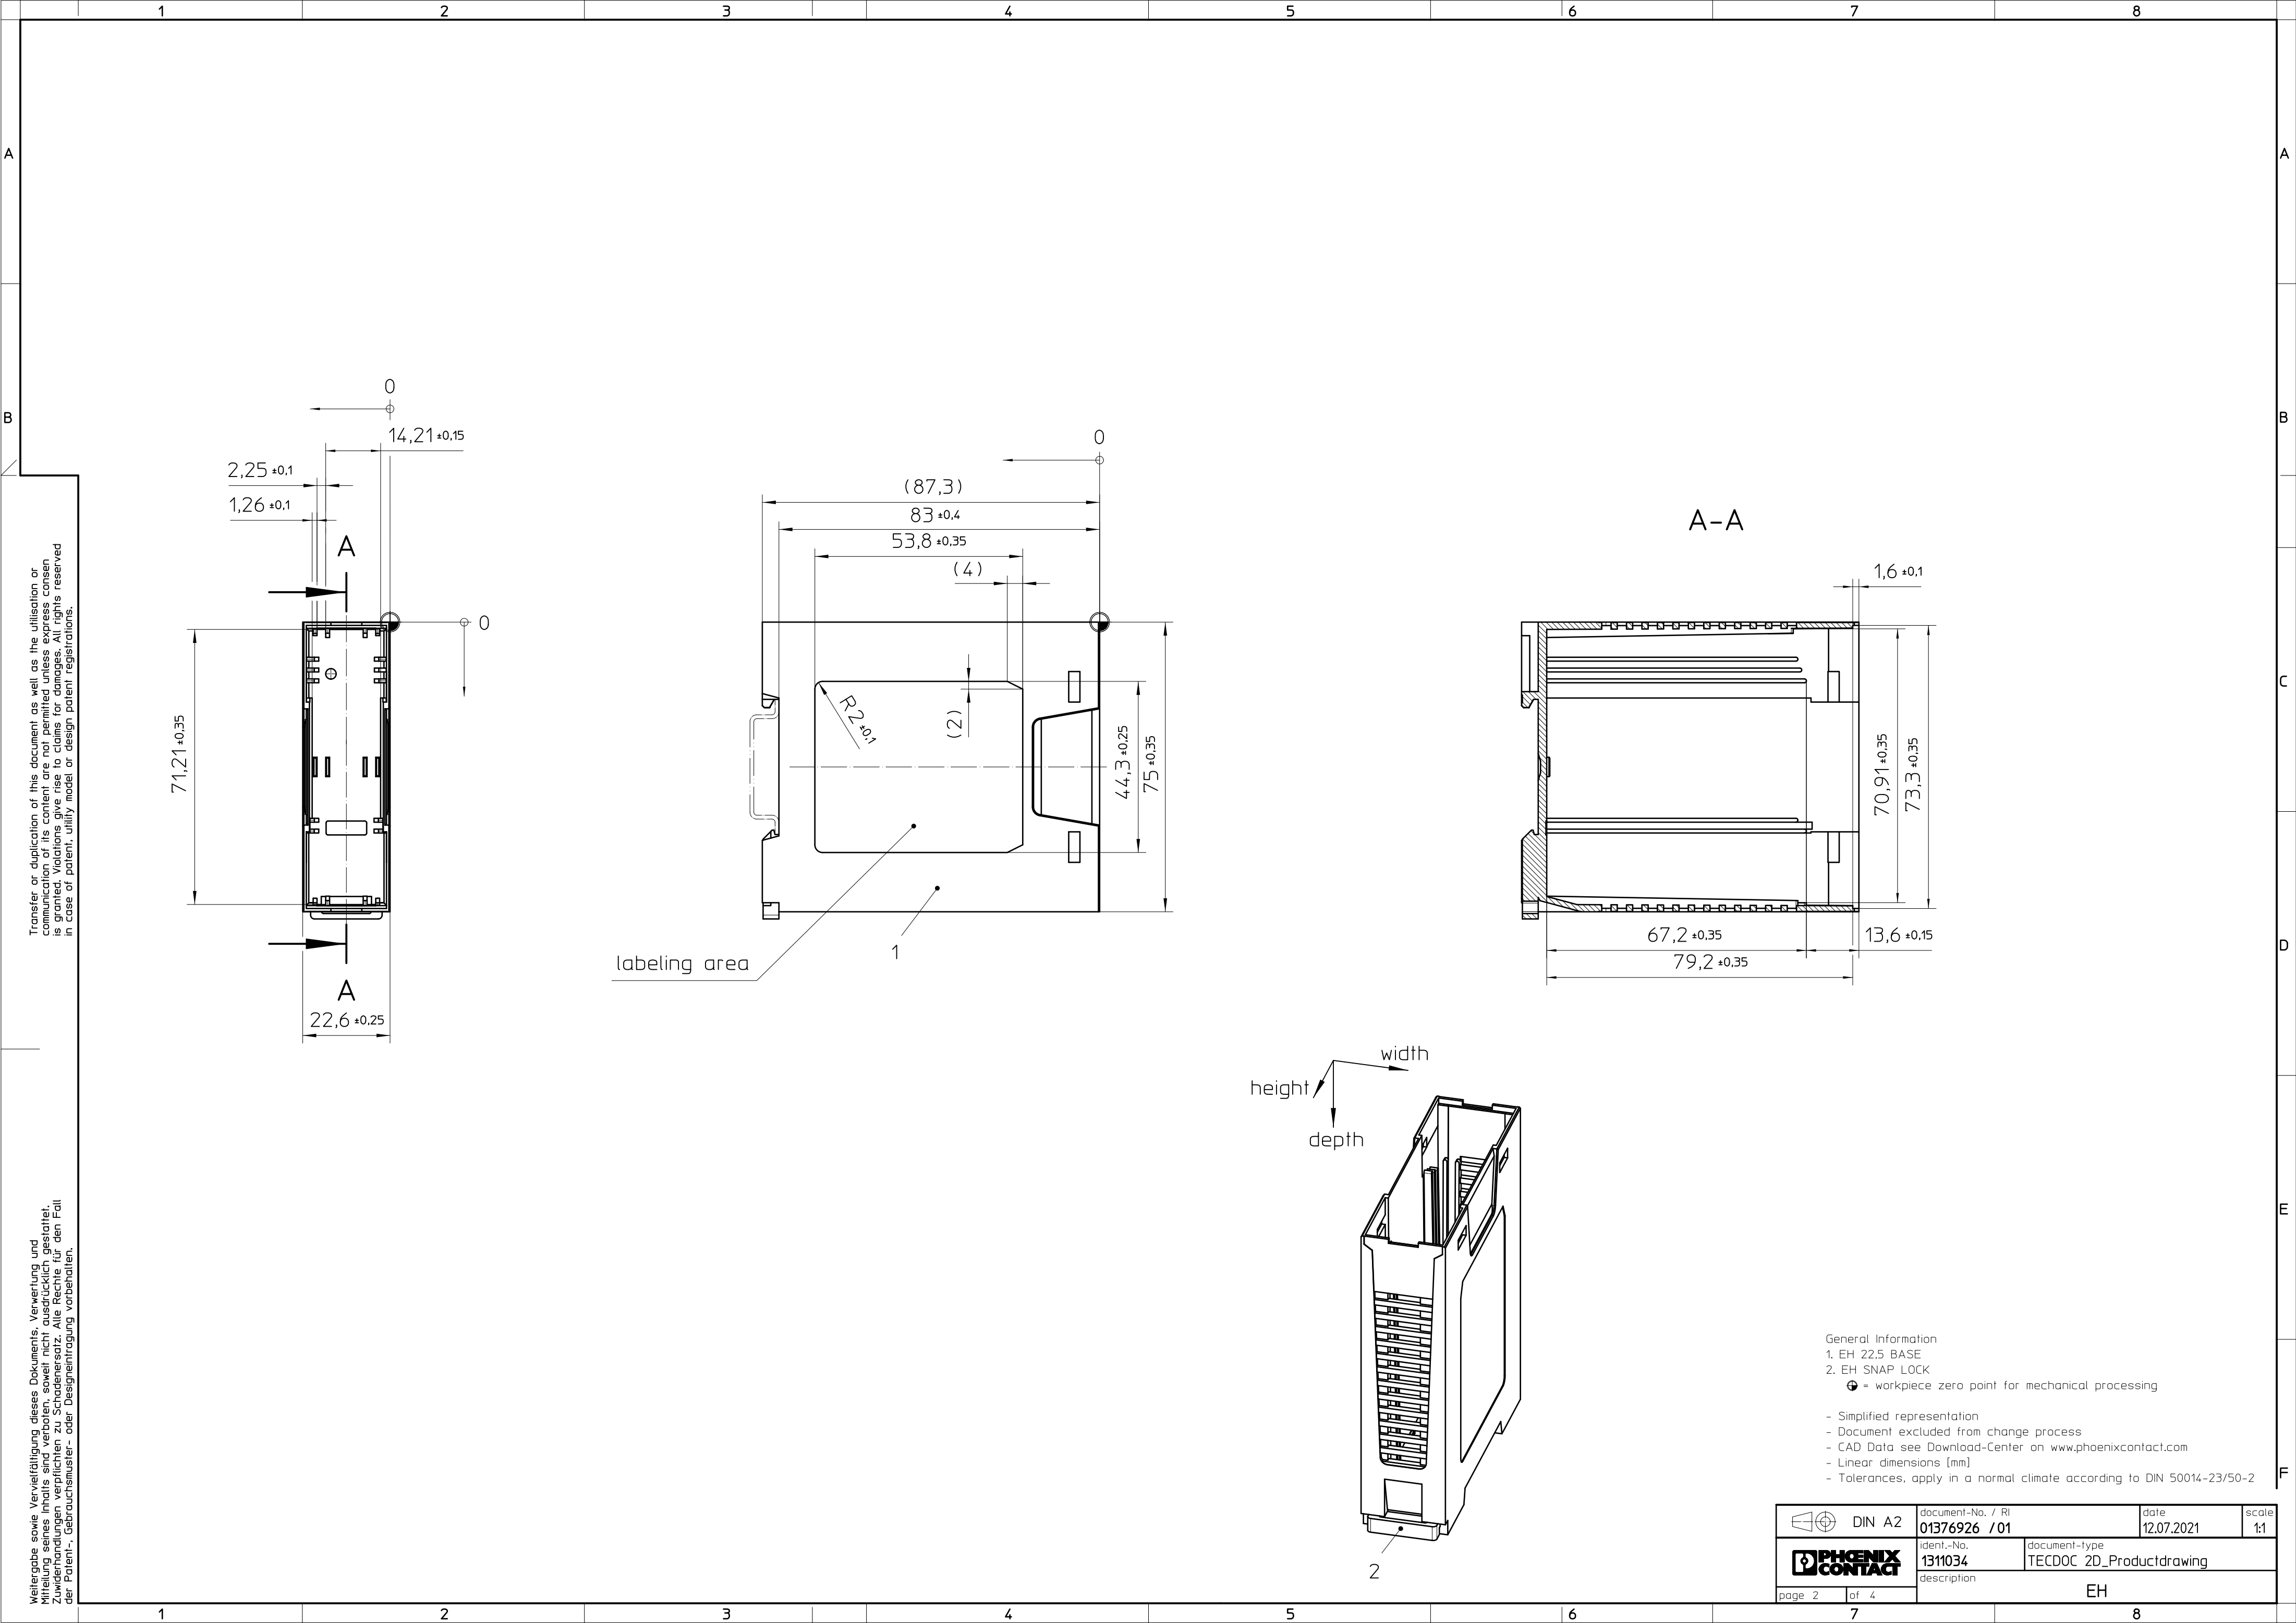


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

- General Information
- 1. EH 22.5 BASE
 - 2. EH SNAP LOCK
 - ⊕ = workpiece zero point for mechanical processing
 - Simplified representation
 - Document excluded from change process
 - CAD Data see Download-Center on www.phoenixcontact.com
 - Linear dimensions [mm]
 - Tolerances, apply in a normal climate according to DIN 50014-23/50-2

	DIN A2	document-No. / RI 01376926 / 01	date 12.07.2021	scale 1:1
	ident.-No. 1311034	document-type TECDOC 2D_Productdrawing		
page 2 of 4		description EH		

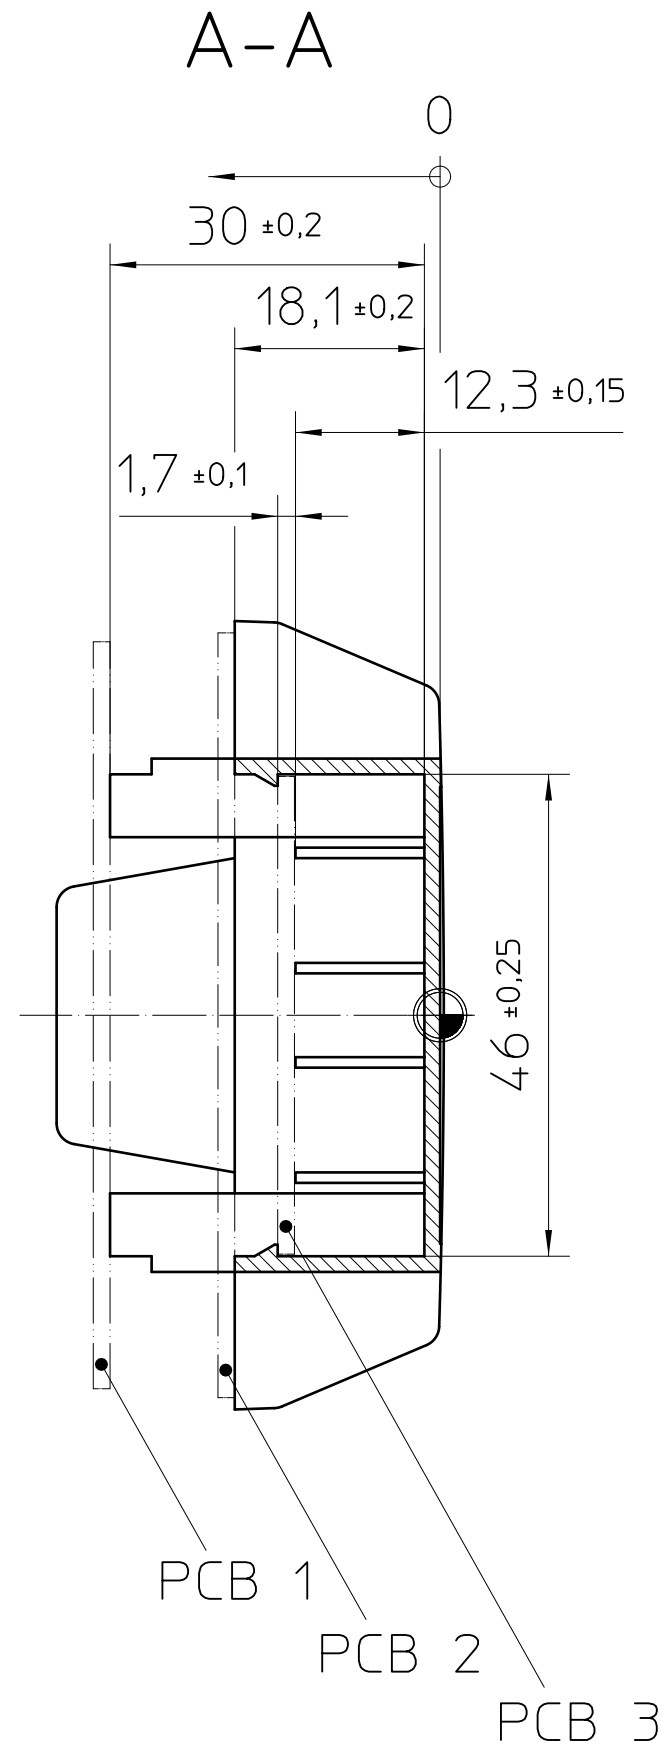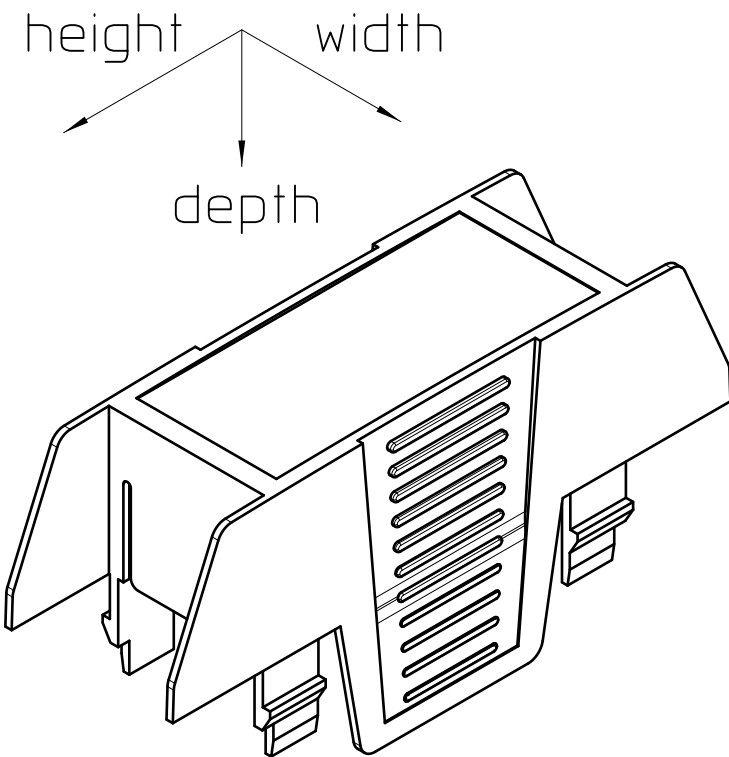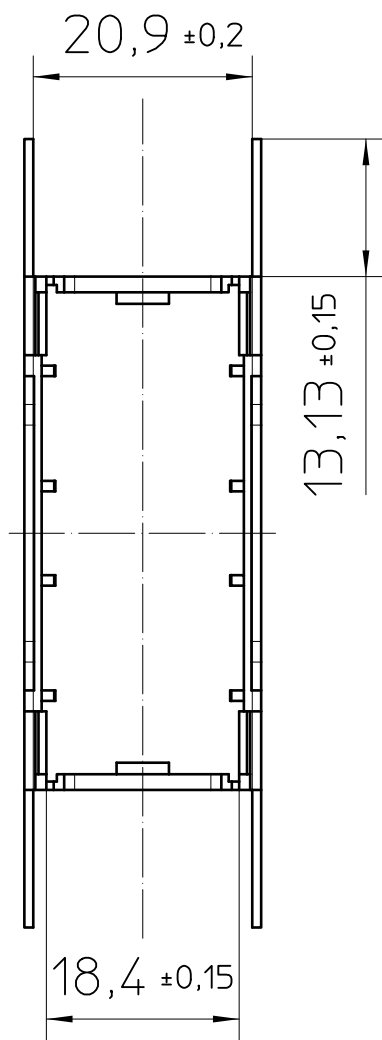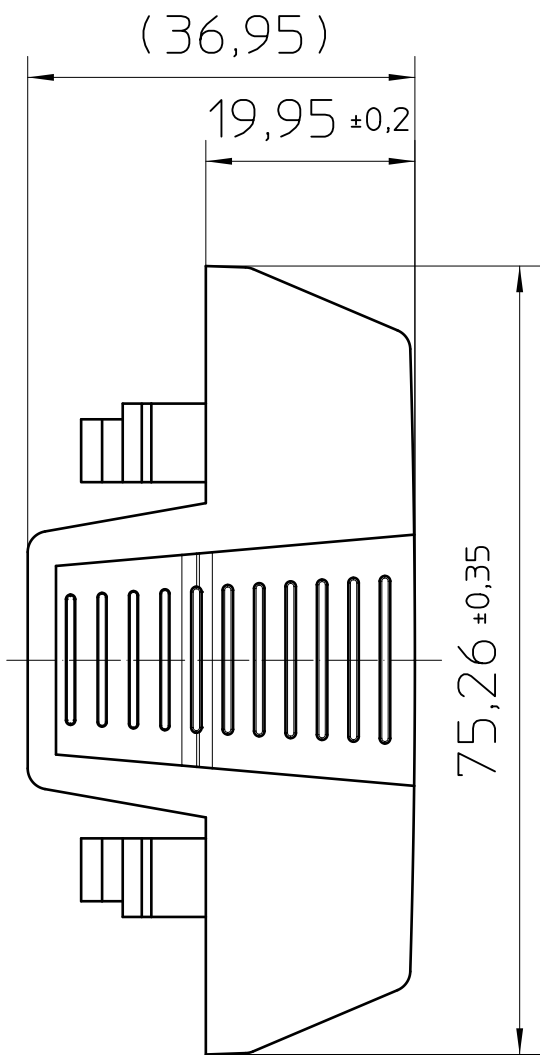
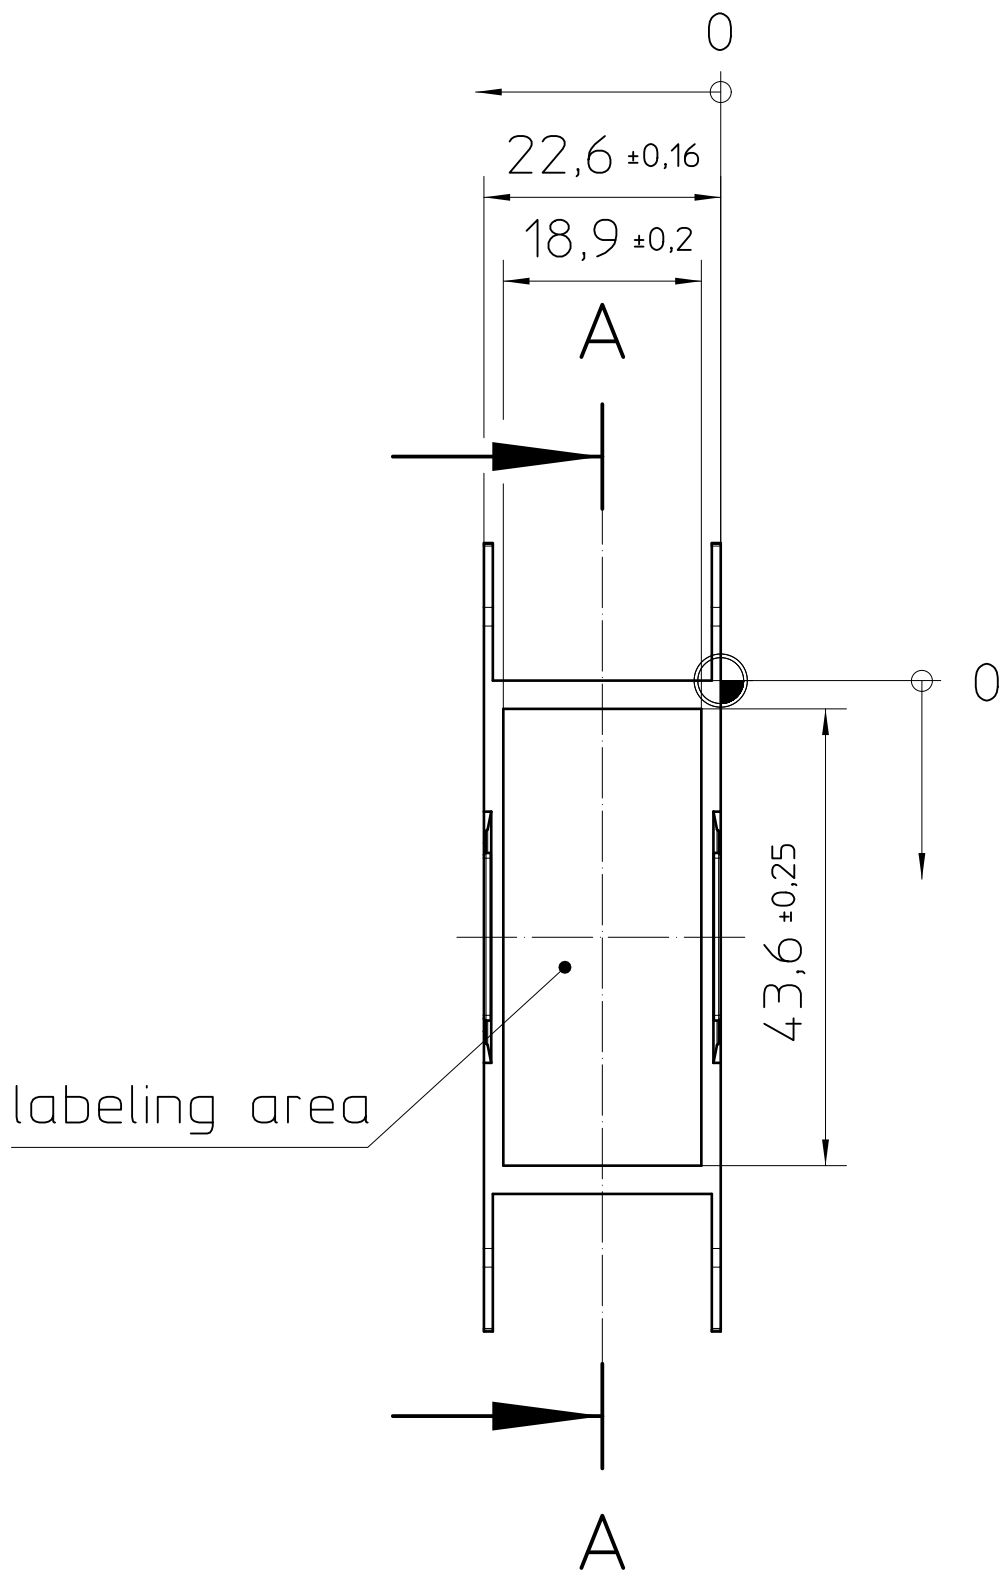


- General Information
- ⊕ = workpiece zero point for mechanical processing
 - Simplified representation
 - Document excluded from change process
 - CAD Data see Download-Center on www.phoenixcontact.com
 - Linear dimensions [mm]
 - Tolerances, apply in a normal climate according to DIN 50014-23/50-2


 DIN A3		document-No. / RI 01376926 / 01	date 12.07.2021	scale 1:1
		ident.-No. 1311034	document-type TECDOC 2D_Productdrawing	
		description EH		
page 3 of 4				

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

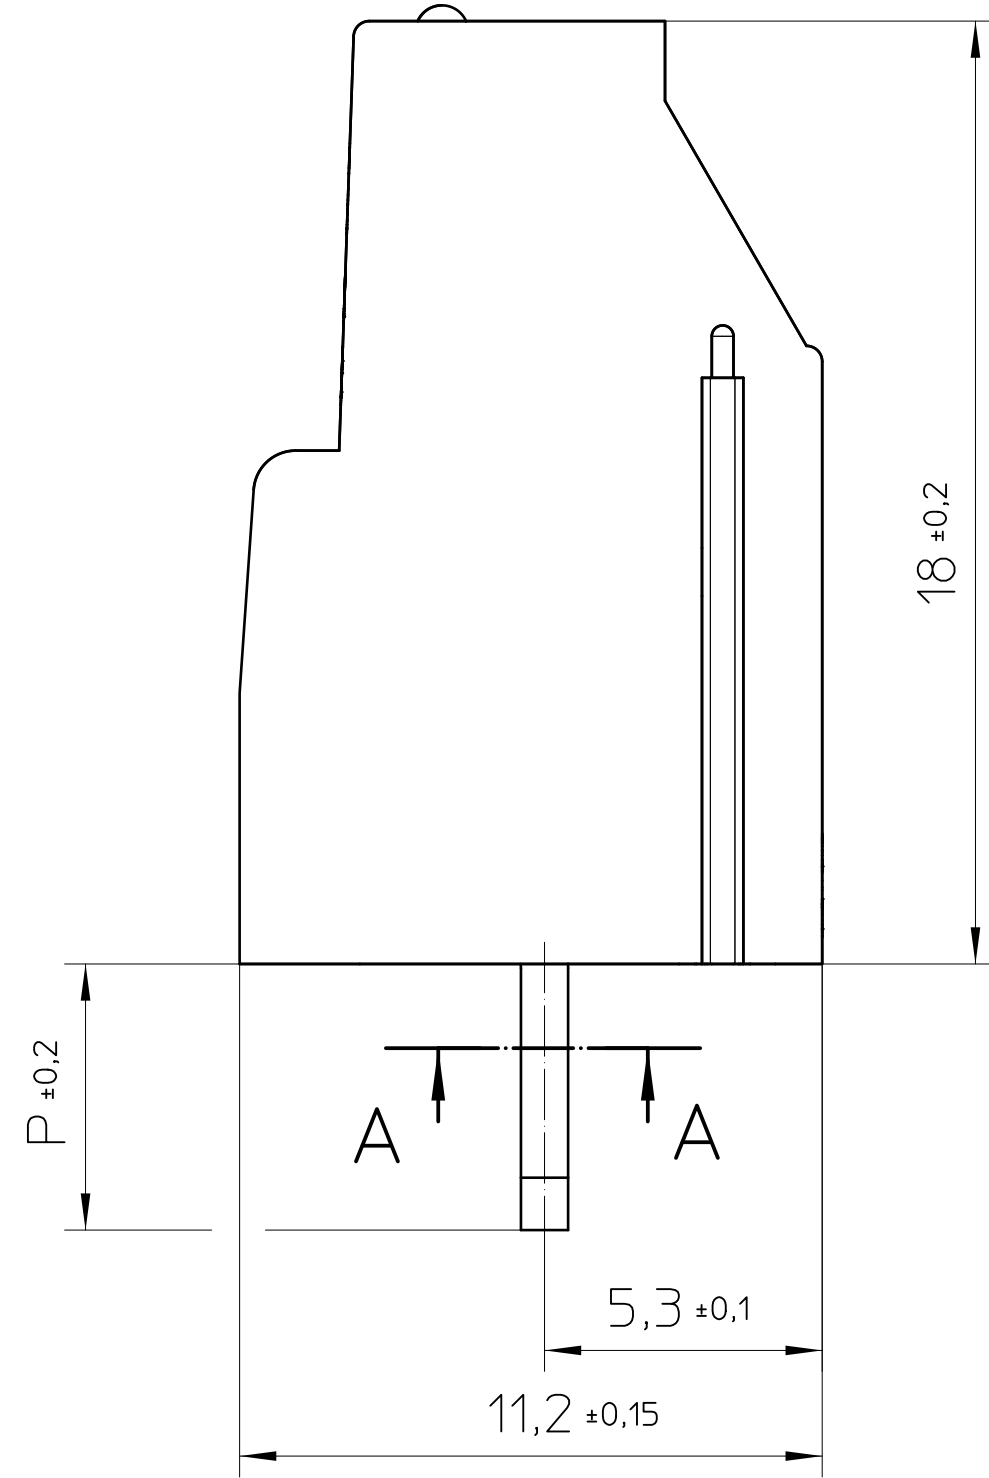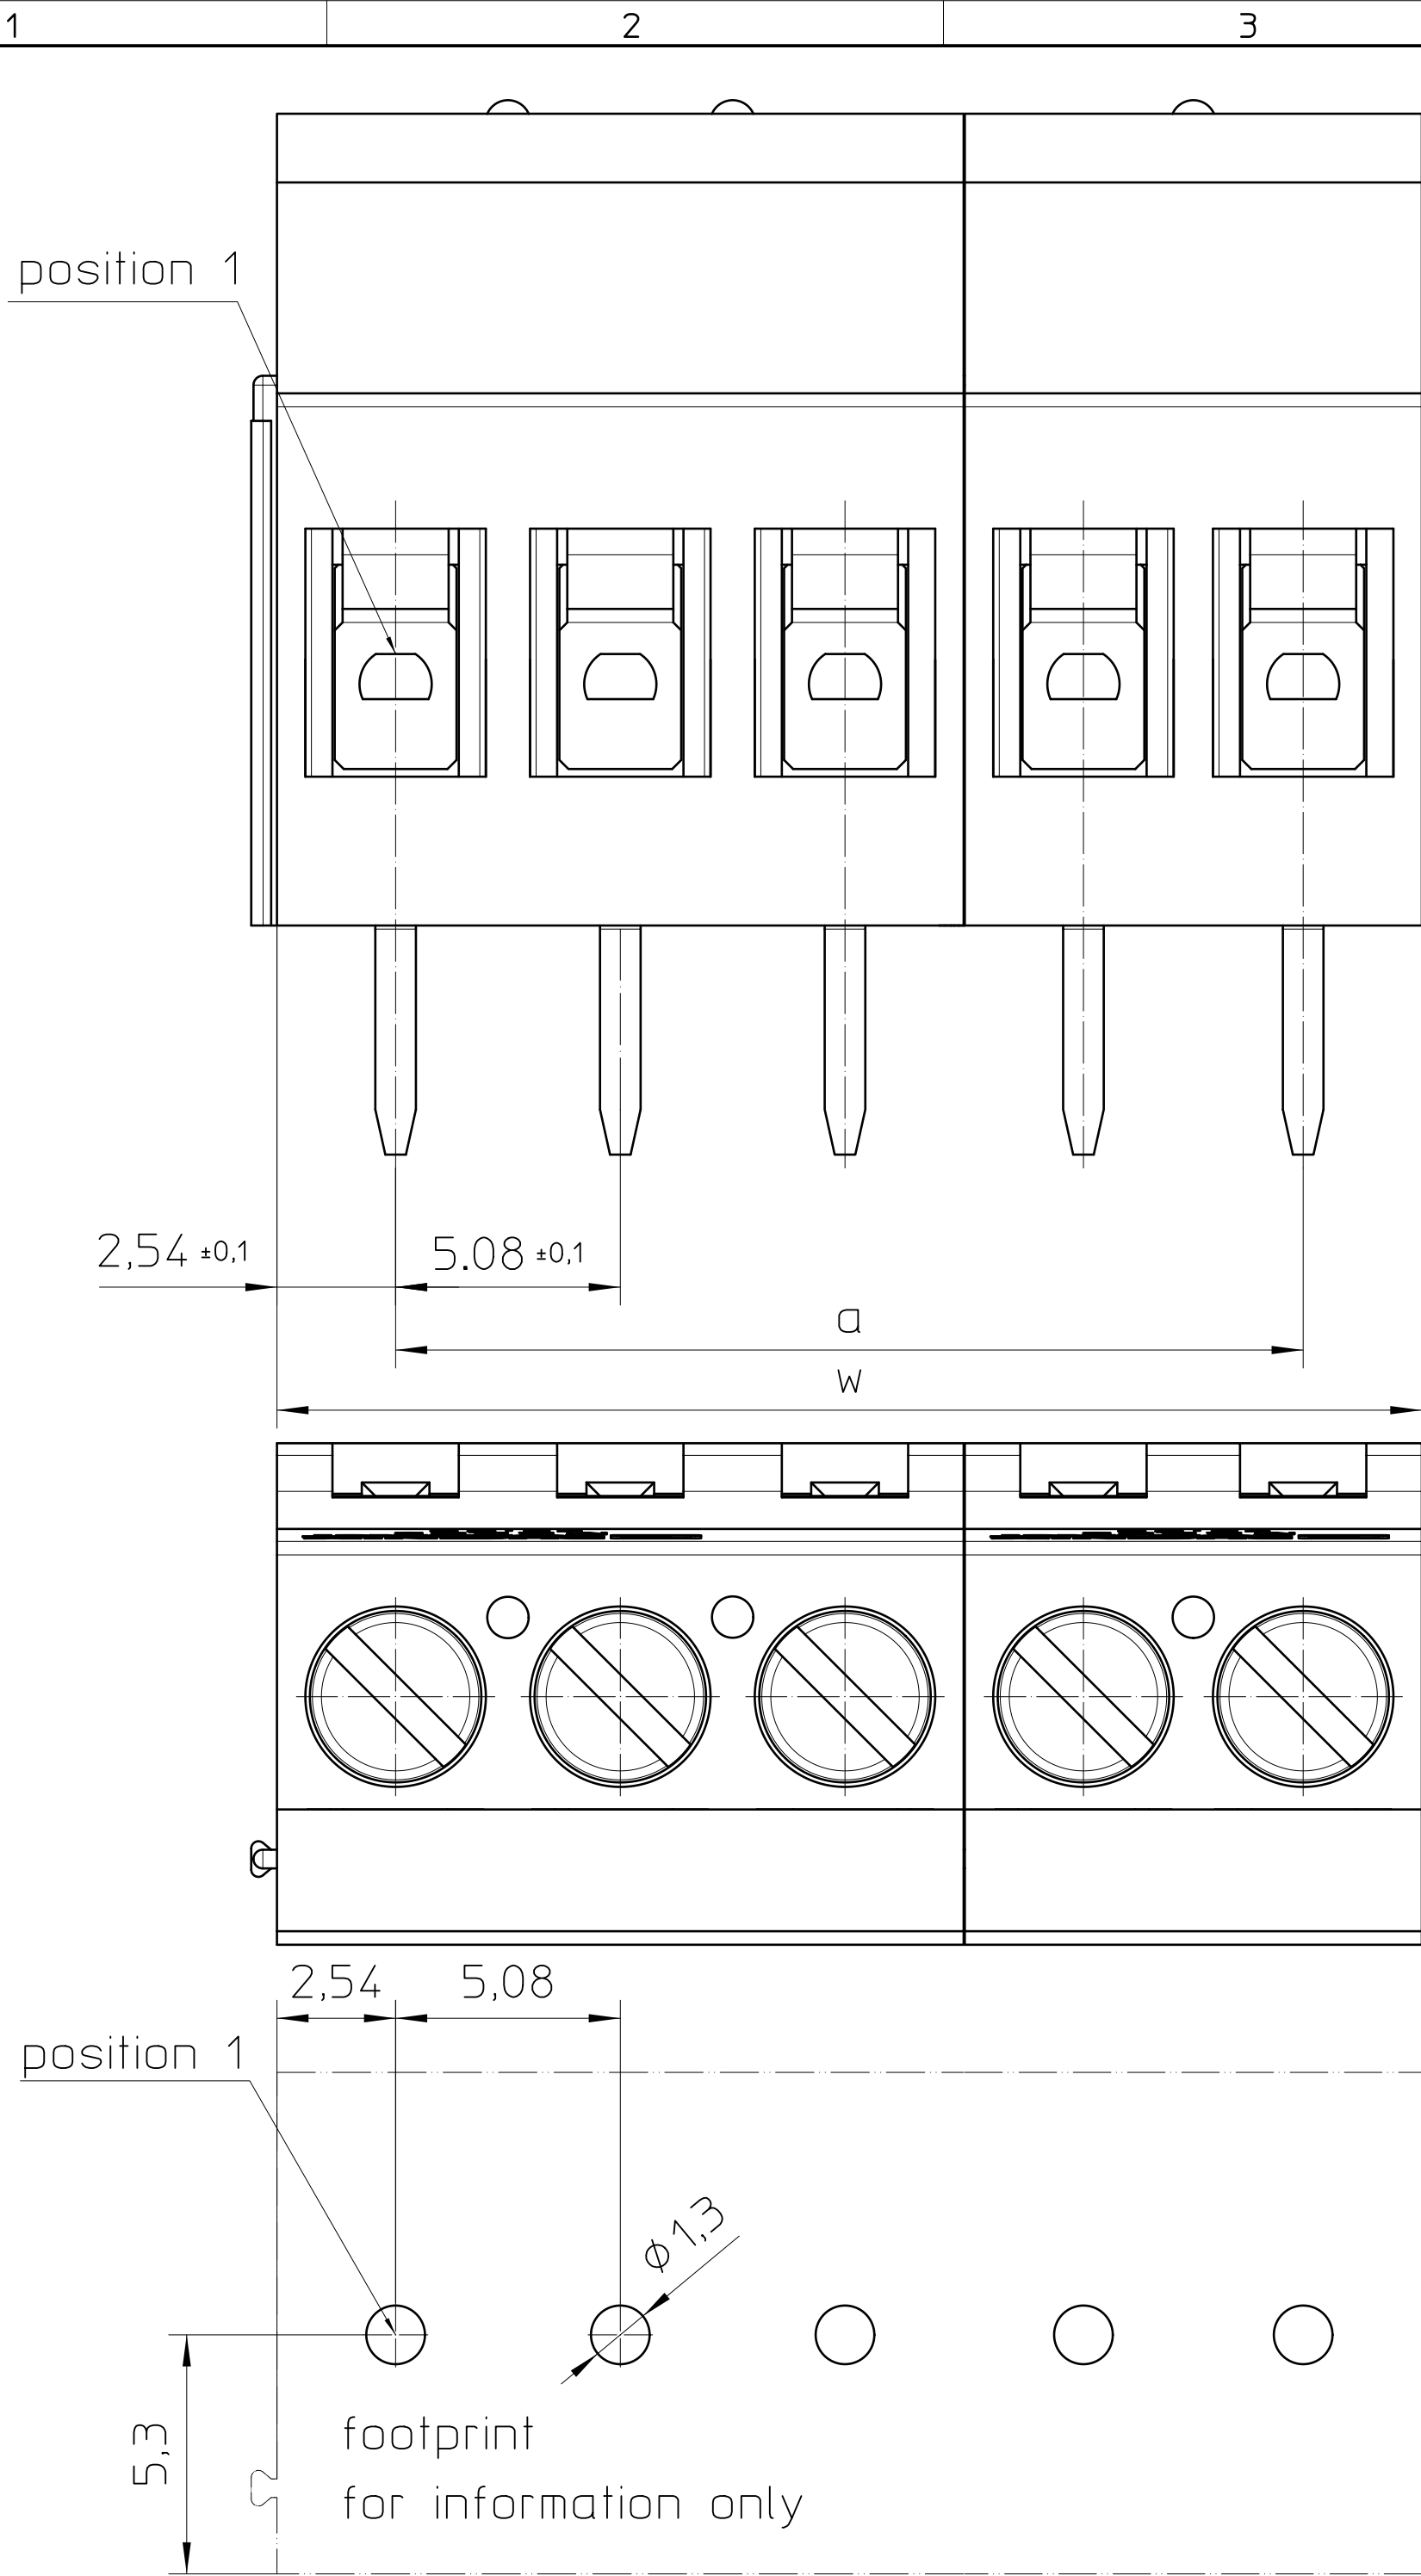

A-A
10:1

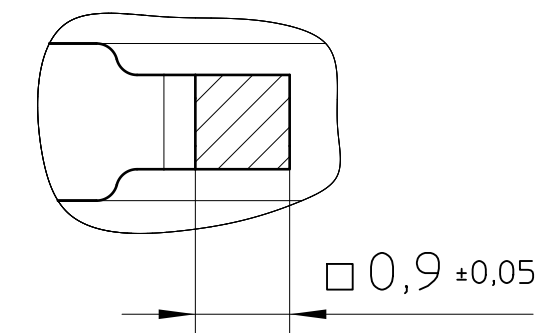

pos.	dim. a	dim. w	
2	5,08 ±0,10	10,16 ±0,15	A
3	10,16 ±0,15	15,24 ±0,15	
4	15,24 ±0,15	20,32 ±0,20	
5	20,32 ±0,20	25,40 ±0,20	
6	25,40 ±0,20	30,48 ±0,20	
7	30,48 ±0,20	35,56 ±0,20	B
8	35,56 ±0,20	40,64 ±0,20	
9	40,64 ±0,20	45,72 ±0,20	
10	45,72 ±0,20	50,80 ±0,25	
11	50,80 ±0,25	55,88 ±0,25	
12	55,88 ±0,25	60,96 ±0,25	C
13	60,96 ±0,25	66,04 ±0,25	
14	66,04 ±0,25	71,12 ±0,25	
15	71,12 ±0,25	76,20 ±0,25	
16	76,20 ±0,25	81,28 ±0,40	
17	81,28 ±0,40	86,36 ±0,40	D
18	86,36 ±0,40	91,44 ±0,40	
19	91,44 ±0,40	96,52 ±0,40	
20	96,52 ±0,40	101,60 ±0,40	
21	101,60 ±0,40	106,68 ±0,40	
22	106,68 ±0,40	111,76 ±0,40	E
23	111,76 ±0,40	116,84 ±0,40	
24	116,84 ±0,40	121,92 ±0,50	
25	121,92 ±0,50	127,00 ±0,50	
26	127,00 ±0,50	132,08 ±0,50	
27	132,08 ±0,50	137,16 ±0,50	
28	137,16 ±0,50	142,24 ±0,50	
29	142,24 ±0,50	147,32 ±0,50	
30	147,32 ±0,50	152,40 ±0,50	