
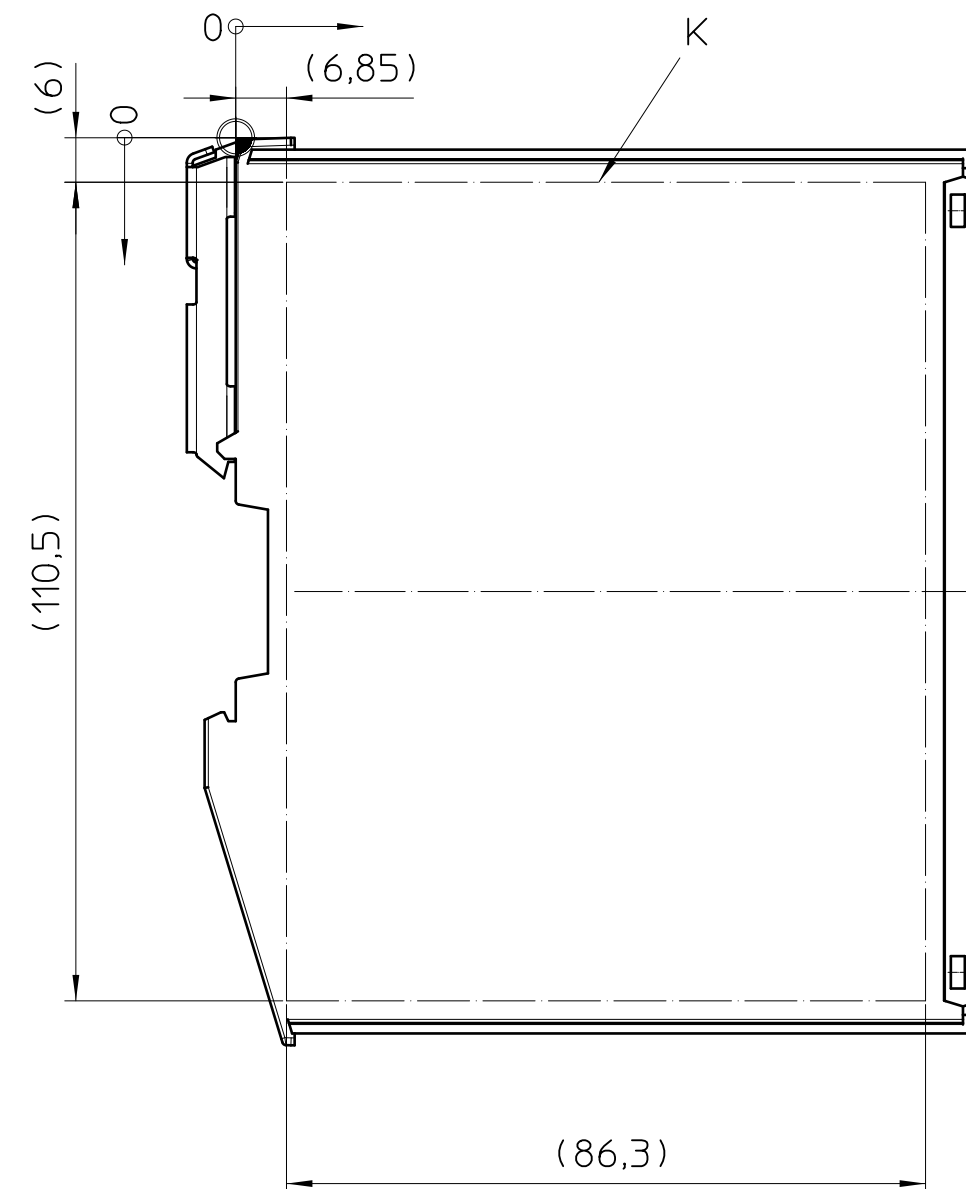
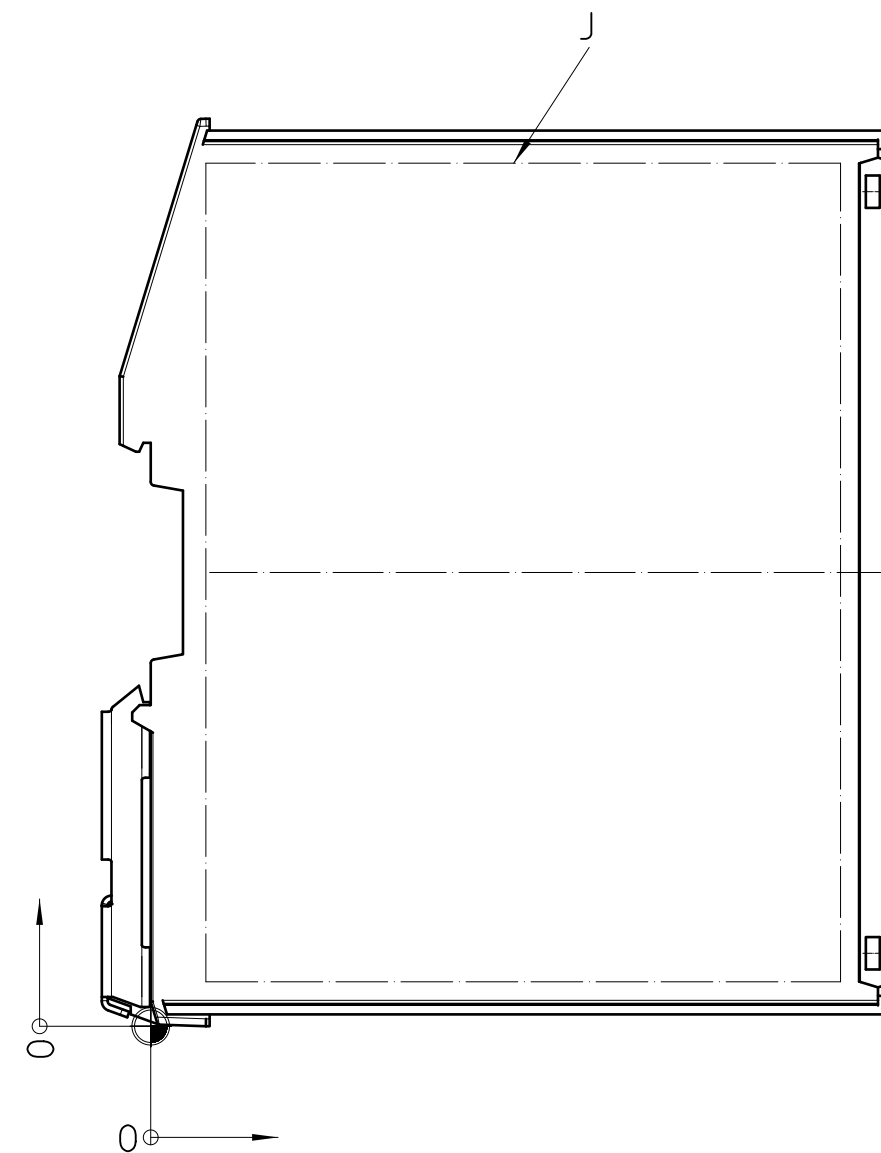
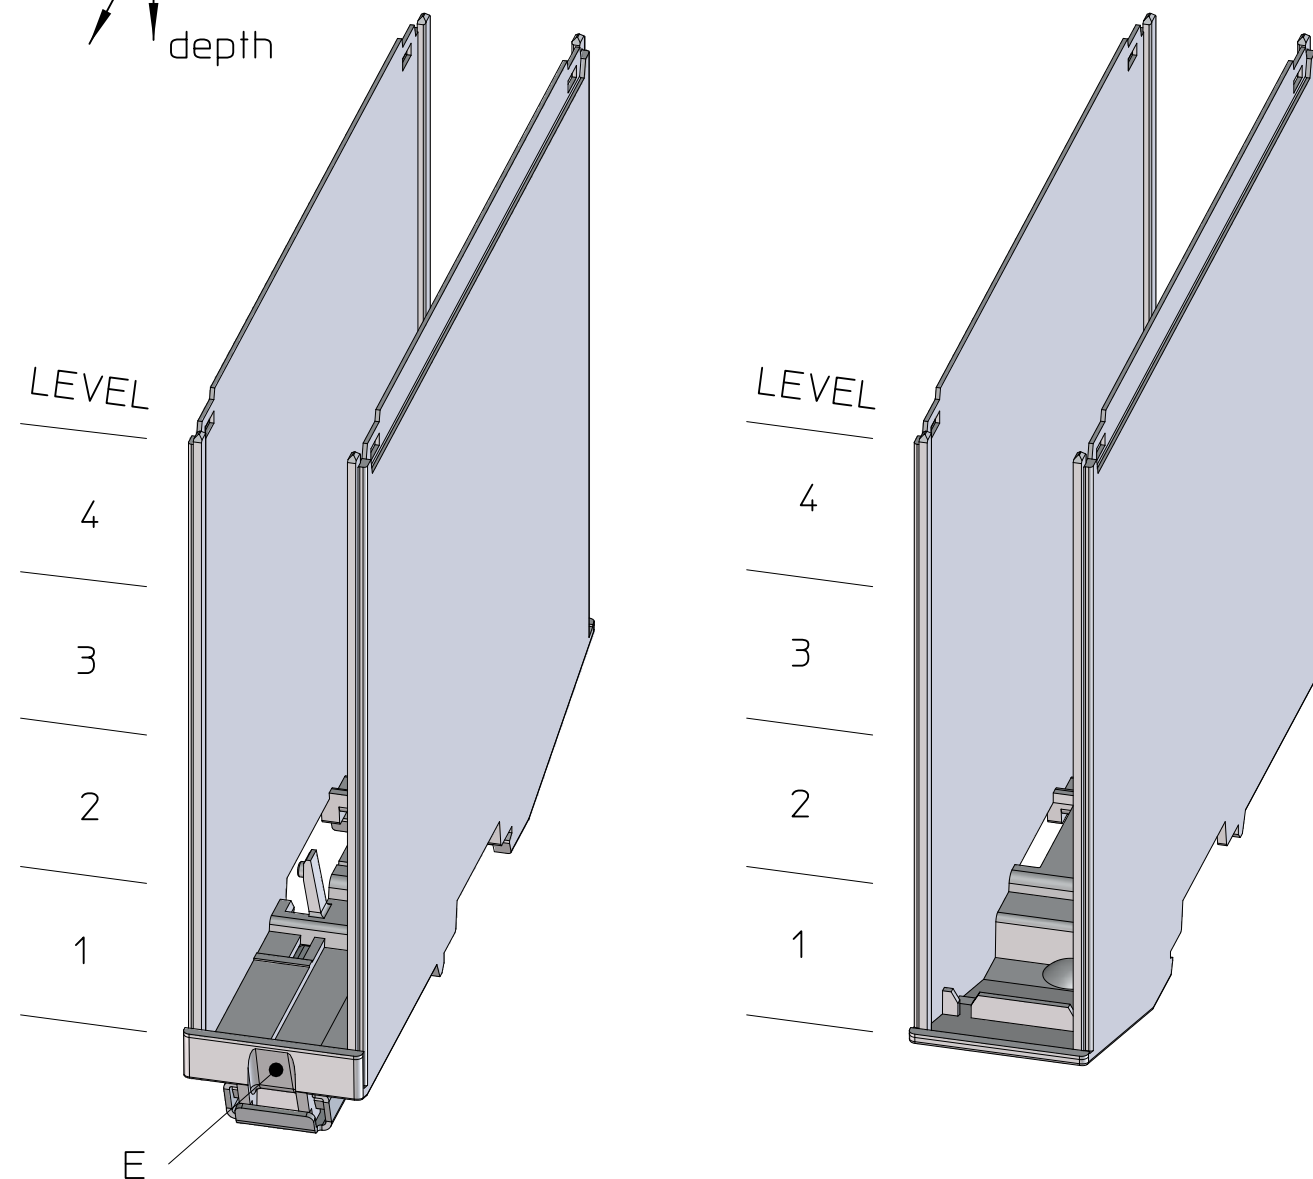



BOTTOM PART

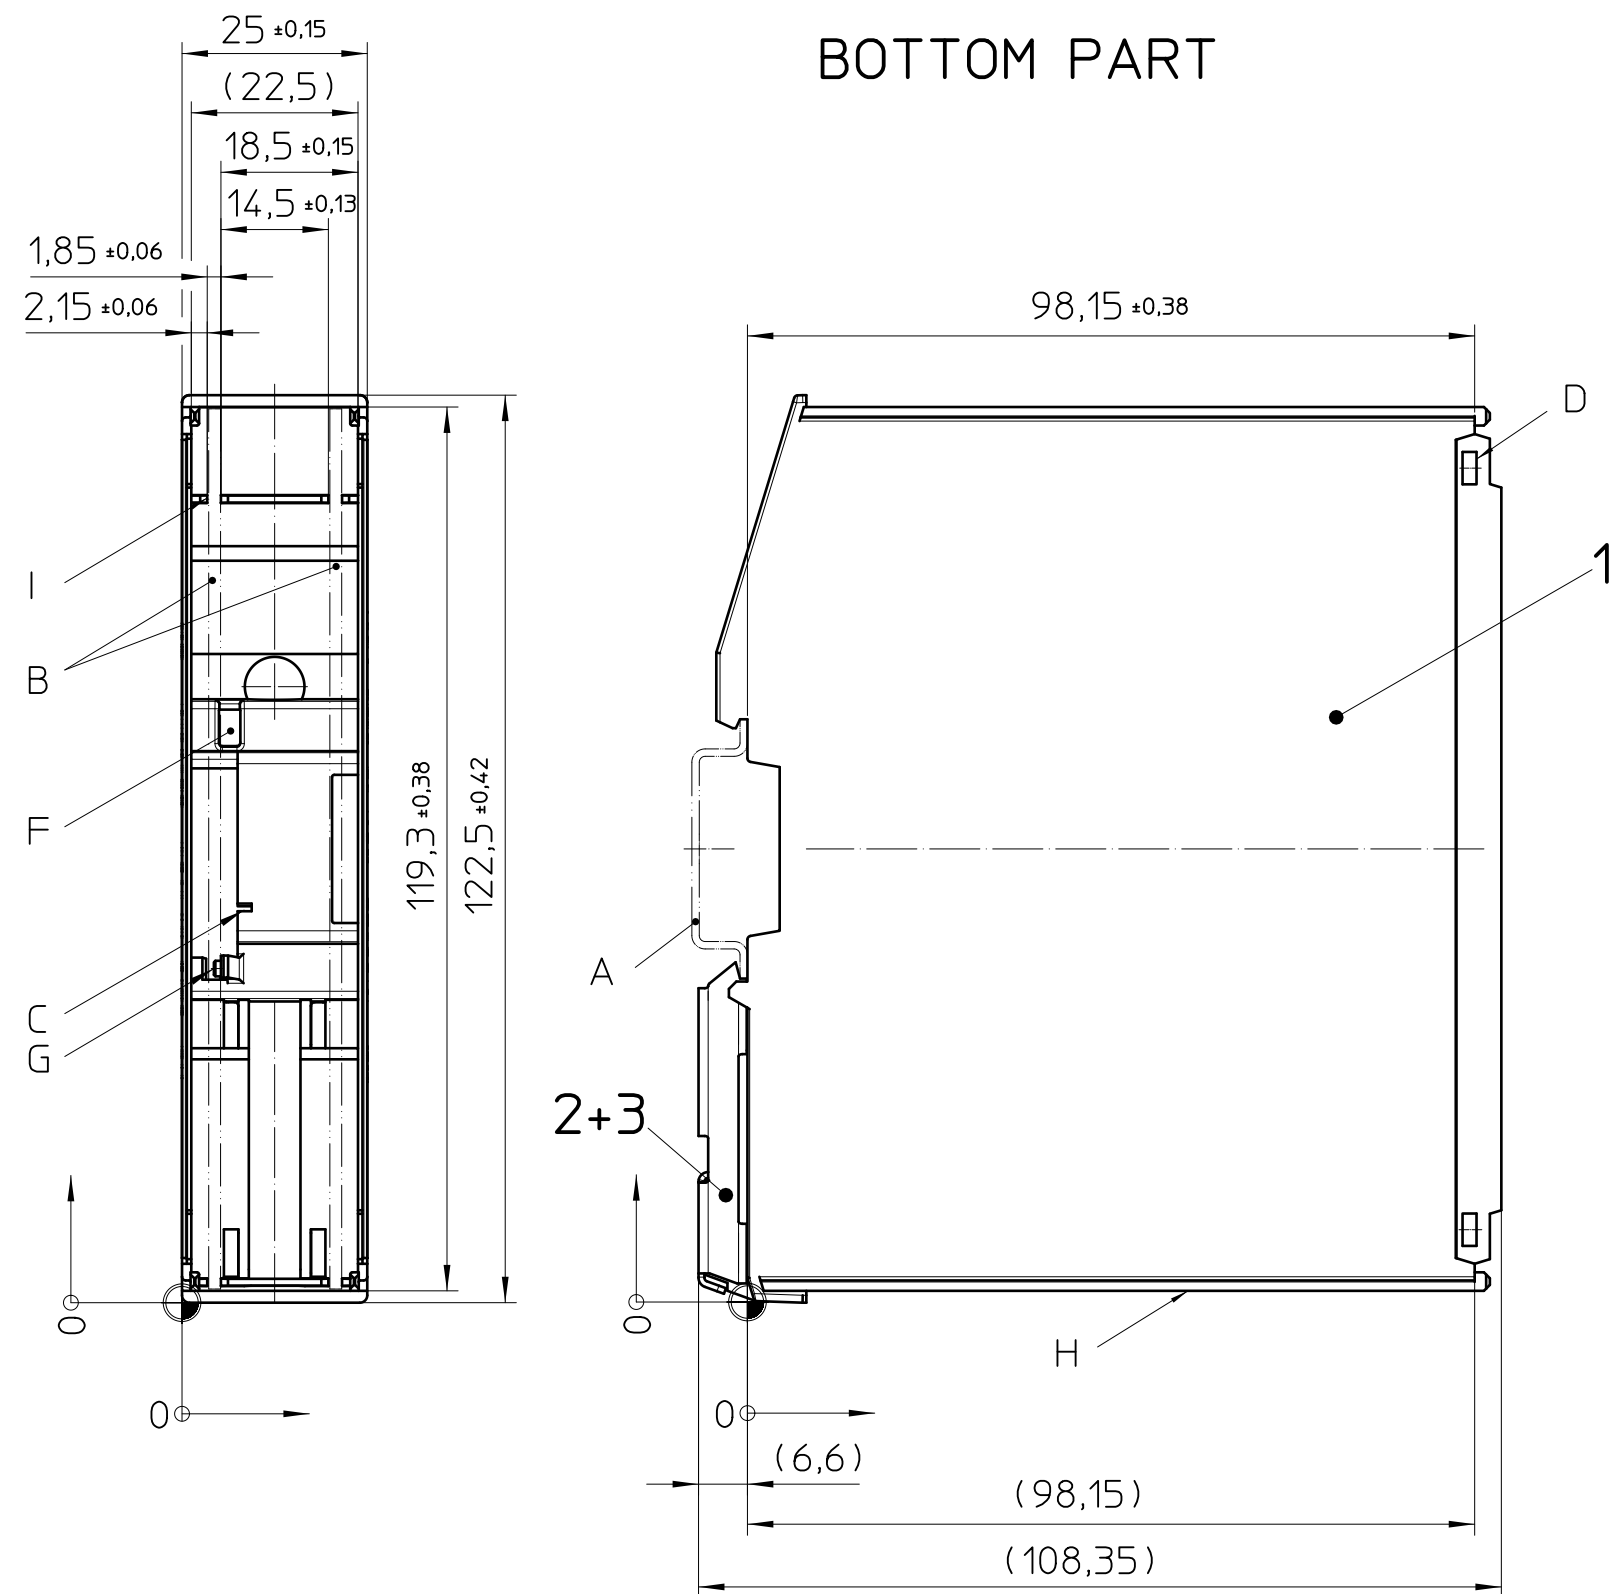

General Information:

- Simplified representation, exemplary shown in gray.
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
-  Workpiece zero point for mechanical processing
- Tolerances for printing DIN ISO 2768-m
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:

- A. Mounting rail like EN 60715, TH 35-7,5 or mounting rail similar to EN 60715, TH 35-15x1,5
- B. PCB $t=1,6\pm0,2$
- C. Guidance slot for TBUS8 . . .
- D. Opening for fixing ICS25-C122 . . . or ICS25-TL122 . . .
- E. Notch for locking release, by screw driver
- F. Opening for ICS-FE-CONTACT
- G. Fixing PCB
- H. Guidance for ICS25-F . . . or ICC25 . . .
- I. PCB guidance
- J. Max. marking area left, with standard printing process, other printing processes on request.
- K. Max. marking area right, with standard printing process, other printing processes on request.

Pos.	QTY	Description	Material
1	1	BOTTOM PART	PA
2	1	FOOT CATCH	STL
3	1	SPRING	STL

 DIN A2		document-no. / n° 01387500 / 01	article-no. 1355955	scale 1:1	- Simplified representation - Document excluded from change process - Linear dimensions (mm)
		date 29.08.2024	document-type TECDOC 2D_Productdrawing		
page 1 of 1		description ICS25-B122X98-0-1018			