


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

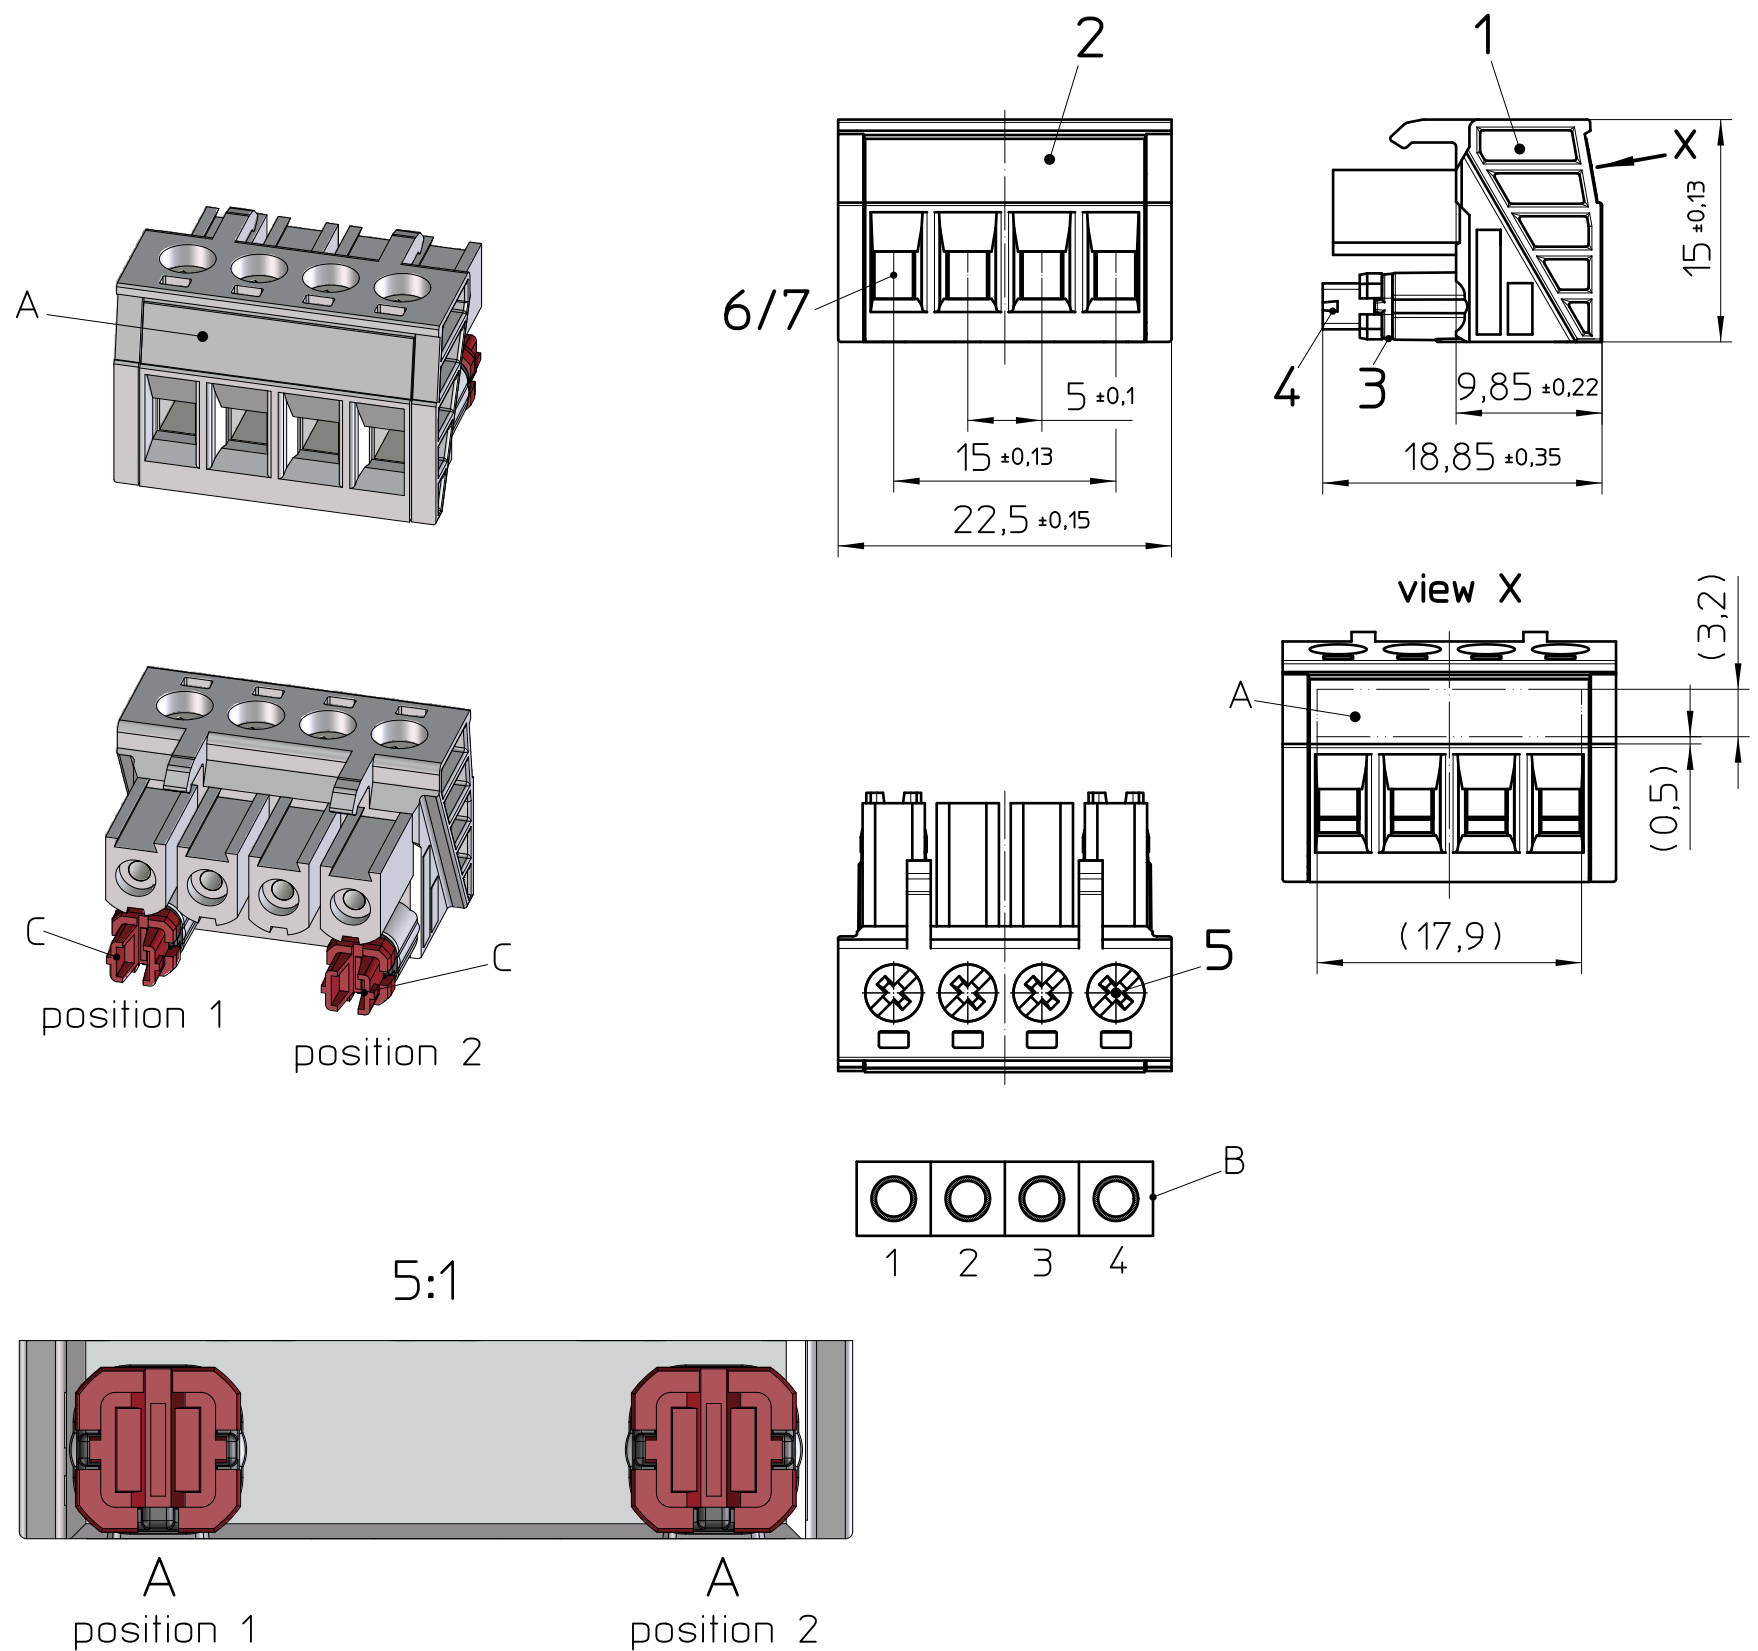

Pos.	QTY	Description	Material
1	1	HOUSING	PA
2	1	COVER	PA
3	2	CODING-PLUG	PA
4	2	CODING-HEADER	PA
5	4	SCREW	Cu alloy
6	4	CLAMPING SLEEVE	Cu alloy
7	4	CURRENT BAR	Cu alloy

General Information:


- Corresponding header ICC25-H/4L/R5,0
- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:

- A) Marking area
B) Contact type

schematic symbol	description	electrical symbol
	single contact	
	without contact	

C) Coding adjustment with screwdriver
e.g. 1205037 - SZS 0,4X2,5 VDE

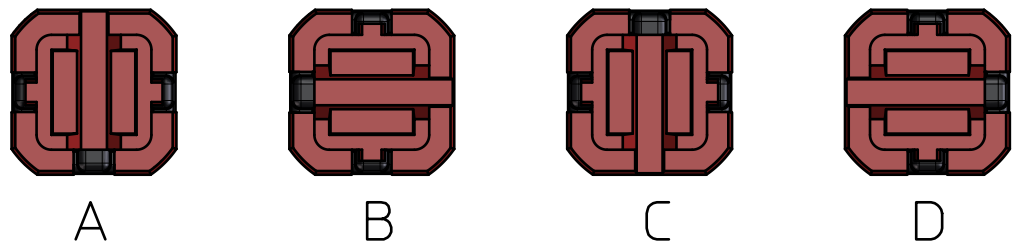

Example: ICC25-PSC2,5/4-5,0-CB

position 1 position 2

 DIN A3		document-no. / ri 01251548 / 07		article-no. 1428287	scale 2:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		date 07.05.2025	document-type TECDOC 2D_Productdrawing			
page 1 of 1		description ICC25-PSC2,5/4-5,0-AA-9005				