
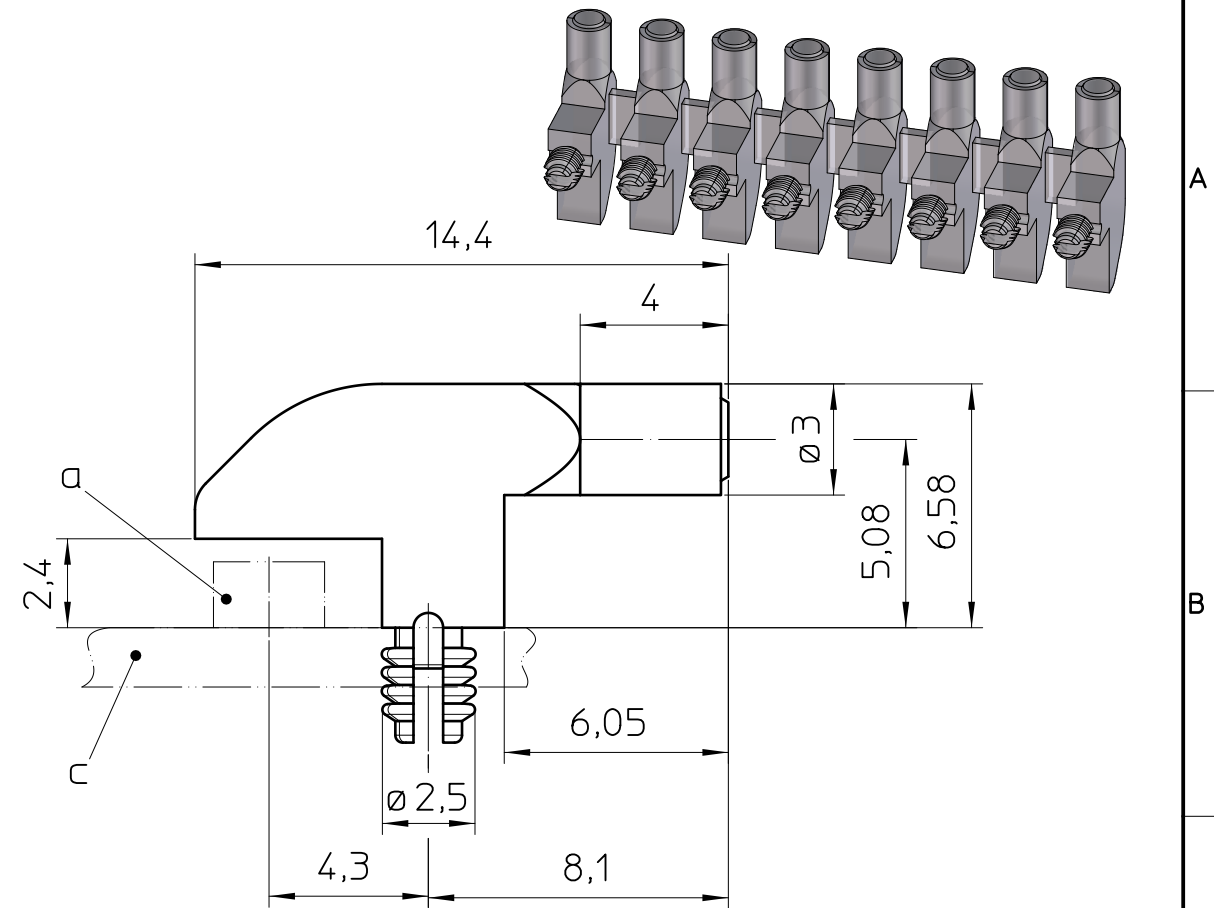


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

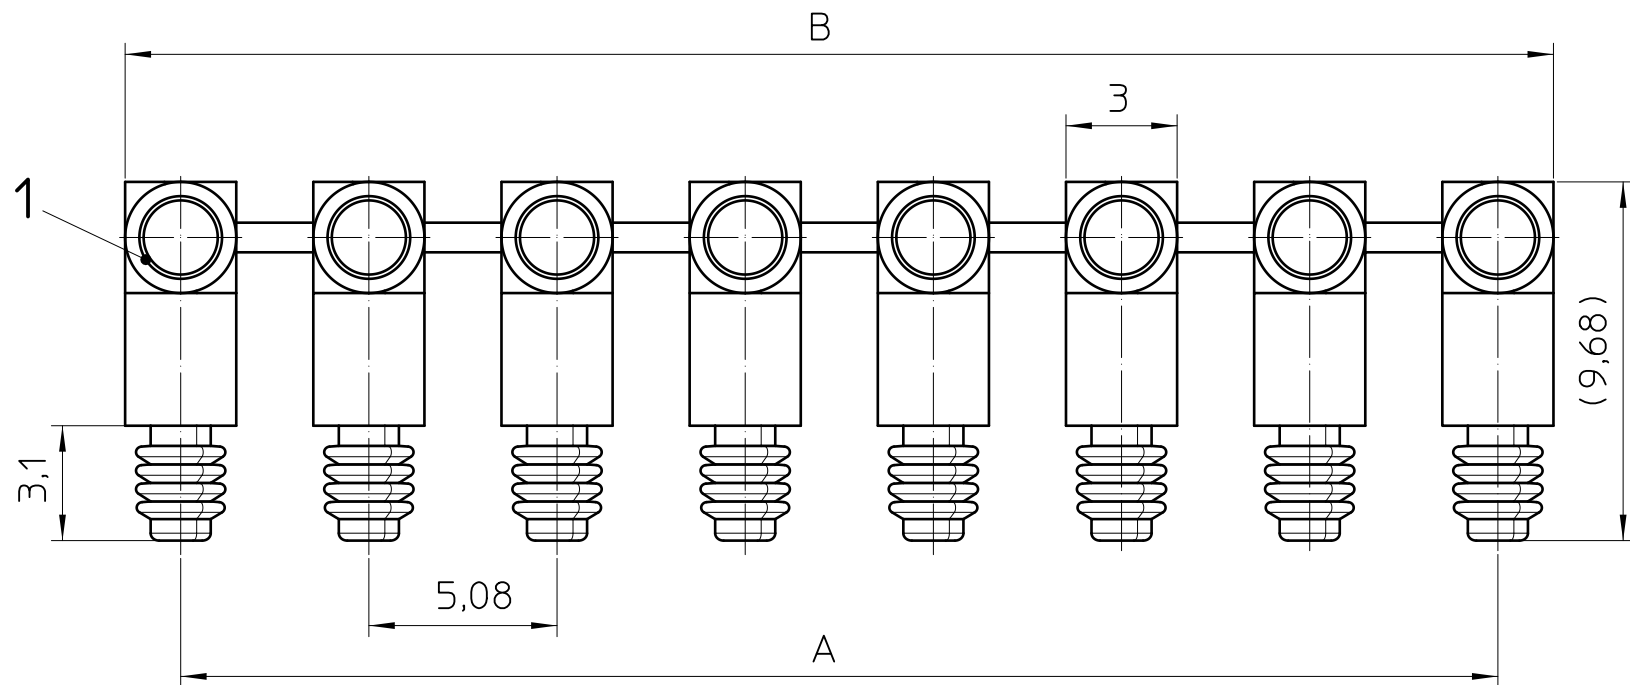

Number of lightpoints	A	B	Item-nr:	Description
2	5,08	8,08	1474372	HS LC-H-D3PL/ R1XC2
3	10,16	13,16	1474381	HS LC-H-D3PL/ R1XC3
4	15,24	18,24	1474382	HS LC-H-D3PL/ R1XC4
6	25,4	28,4	1474384	HS LC-H-D3PL/ R1XC6
8	35,56	38,56	1474386	HS LC-H-D3PL/ R1XC8


General information:

- a. LED
- b. Pad for SMD-LED
- c. PCB

LED-types: LS T670; LSG T670; LY T676

Web: www.phoenixcontact.com webcode: #1638

recommended PCB layout
view: component side

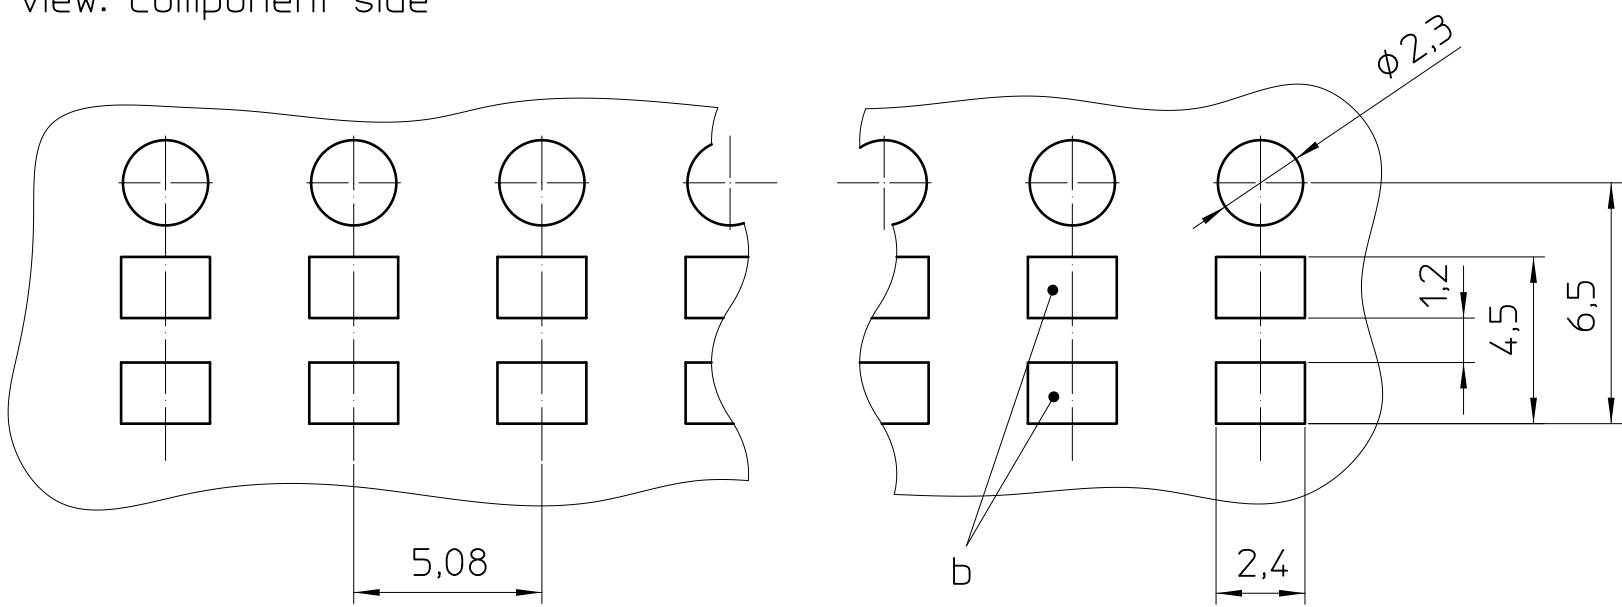

Pos.	QTY	Description	Material
1	1	LIGHT CONDUCTOR	PC

	DIN A3	document-no. / ri	article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		01483641 / 01	1474382	5:1	
	date	document-type			
16.11.2022	TECDOC 2D_Productdrawing				
page 1 of 1		description			
		HS LC-H-D3PL/ R1XC4			