


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

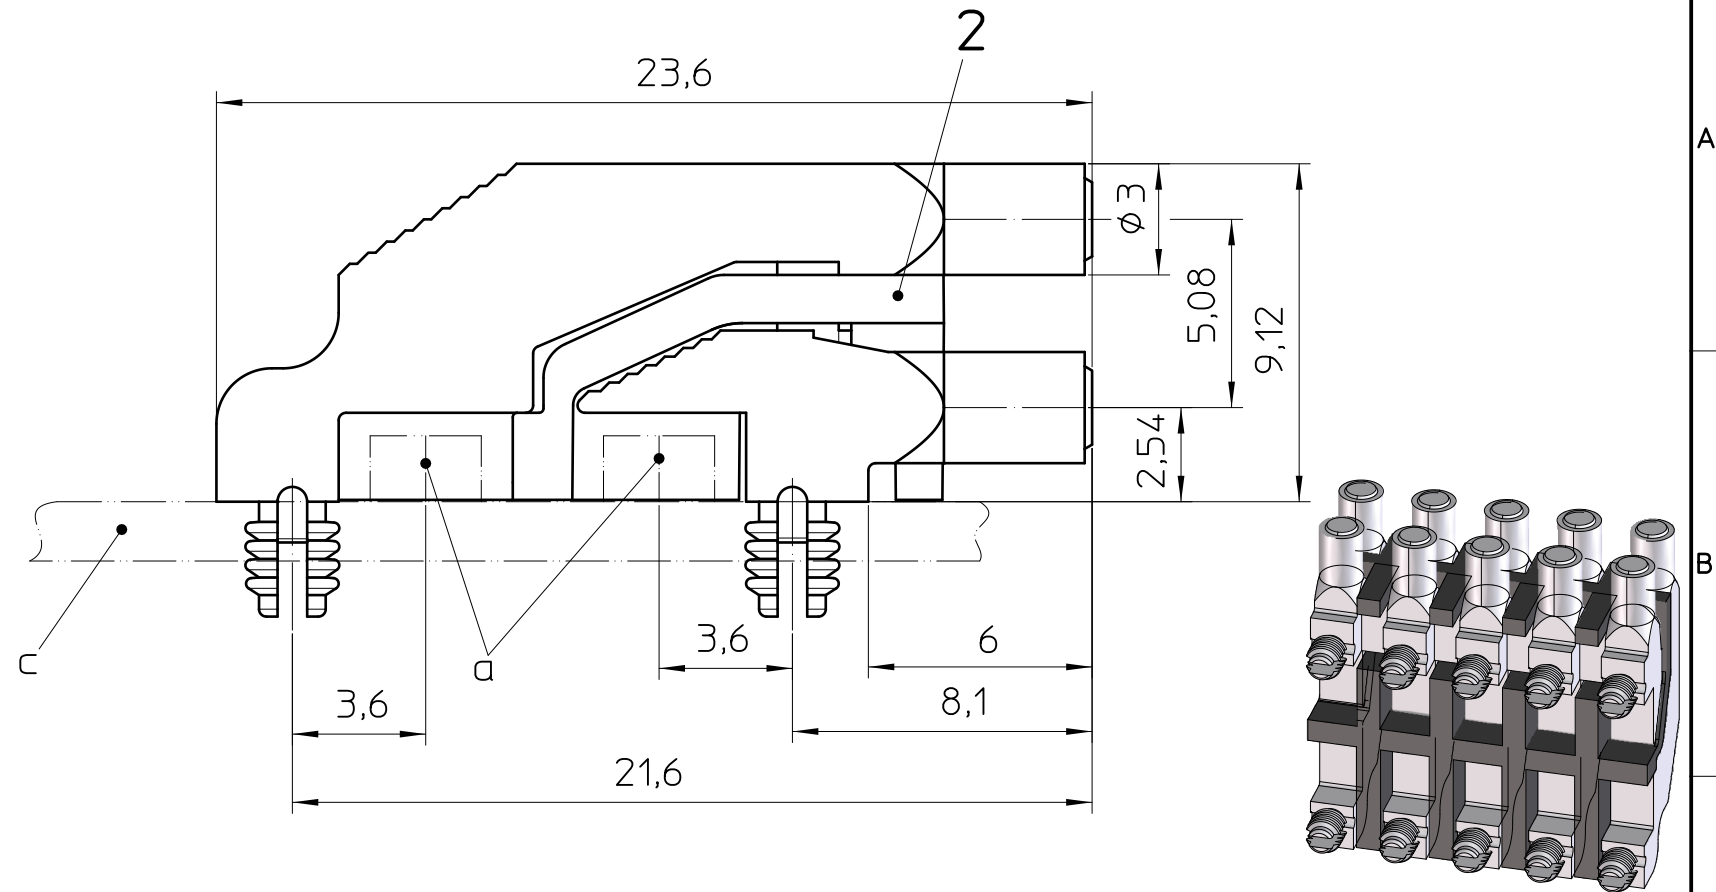

Technical drawing of a mechanical part, showing two views: a front view (left) and a side view (right).

Front View (Left):

- Overall width: 5,08
- Distance from left edge to center of the left circular feature: 1,65
- Width of the central rectangular slot: 2,4
- Two circular features at the ends, each with a diameter of $\phi 2,4$.

Side View (Right):

- Overall height: 13,5
- Distance from the bottom edge to the center of the central rectangular slot: 3,55
- Two circular features at the ends, each with a diameter of $\phi 2,4$.

Detail View D (Bottom Right):

- Shows a circular feature with a diameter of $\phi 2,4$.

number of lightpoints	A	B	Item-nr:	Description
4	5,08	8,46	1474395	HS LC-H-D3PL/ R2XC2-5,08
6	10,16	13,54	1474396	HS LC-H-D3PL/ R2XC3-5,08
8	15,24	18,64	1474397	HS LC-H-D3PL/ R2XC4-5,08
10	20,32	23,72	1474399	HS LC-H-D3PL/ R2XC5-5,08

- LED
- Pad for SMD-LED
- PCB

Web: www.phoenixcontact.com webcode: #1638

Pos.	QTY	Description	Material
1	1	LIGHT CONDUCTOR	PC
2	1	DIAPHRAGM	PBT

 DIN A3		document-no. / ri 01485004 / 01		article-no. 1474399		scale 5:1		- Simplified representation - Document excluded from change process - Linear dimensions [mm]	
		date 16.11.2022		document-type TECD0C 2D_Productdrawing					
page 1 of 1		description HS LC-H-D3PL/ R2XC5-5,08							