



L	Item-nr:	Description
50	1474419	HS LC-F-SP-5,2X2-50
80	1474448	HS LC-F-SP-5,2X2-80
150	1474449	HS LC-F-SP-5,2X2-150


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

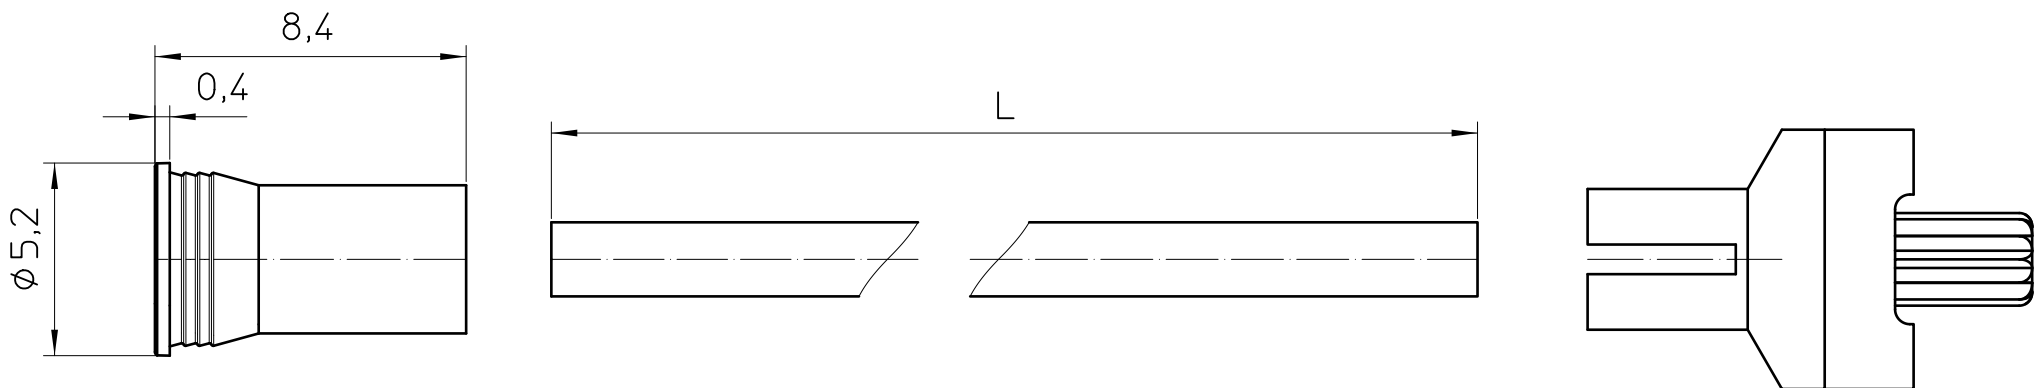

L	Item-nr:	Description
50	1474451	HS LC-F-CS-5,2X2-50
80	1474452	HS LC-F-CS-5,2X2-80
150	1474453	HS LC-F-CS-5,2X2-150

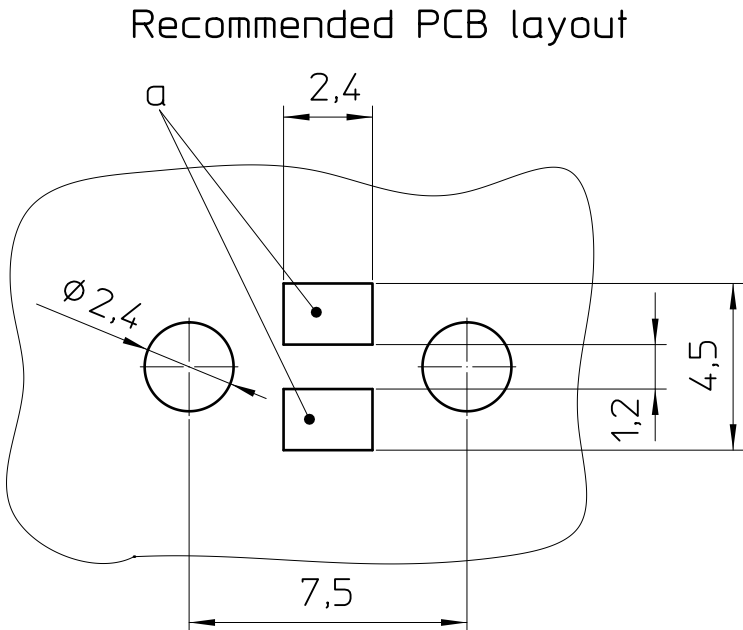


Tolerances for PCB:
dimensions ≤ 30 : $\pm 0,10$ / $R \pm 0,2$ / $\pm 1^\circ$
dimensions > 30 : $\pm 0,15$ / $R \pm 0,2$ / $\pm 1^\circ$
symmetry: 0,2

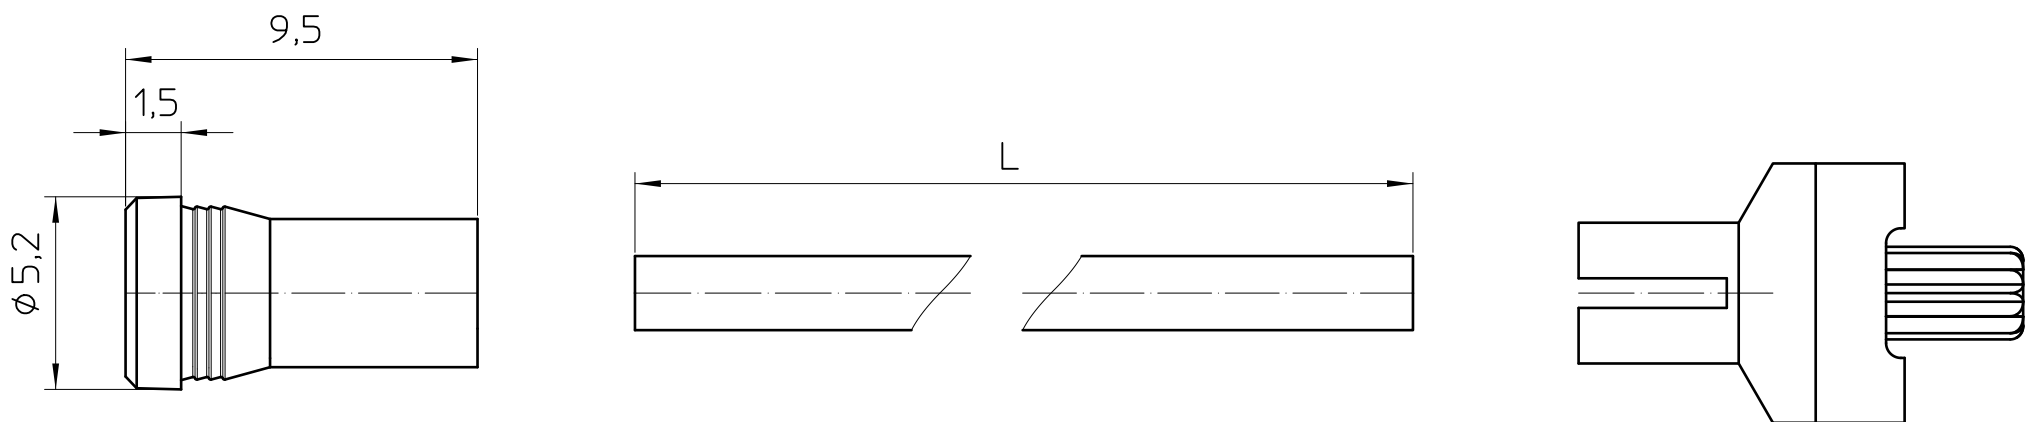

L	Item-nr:	Description
50	1474459	HS LC-F-PL-5,2X2-50
80	1474461	HS LC-F-PL-5,2X2-80
150	1474463	HS LC-F-PL-5,2X2-150

Mounting example

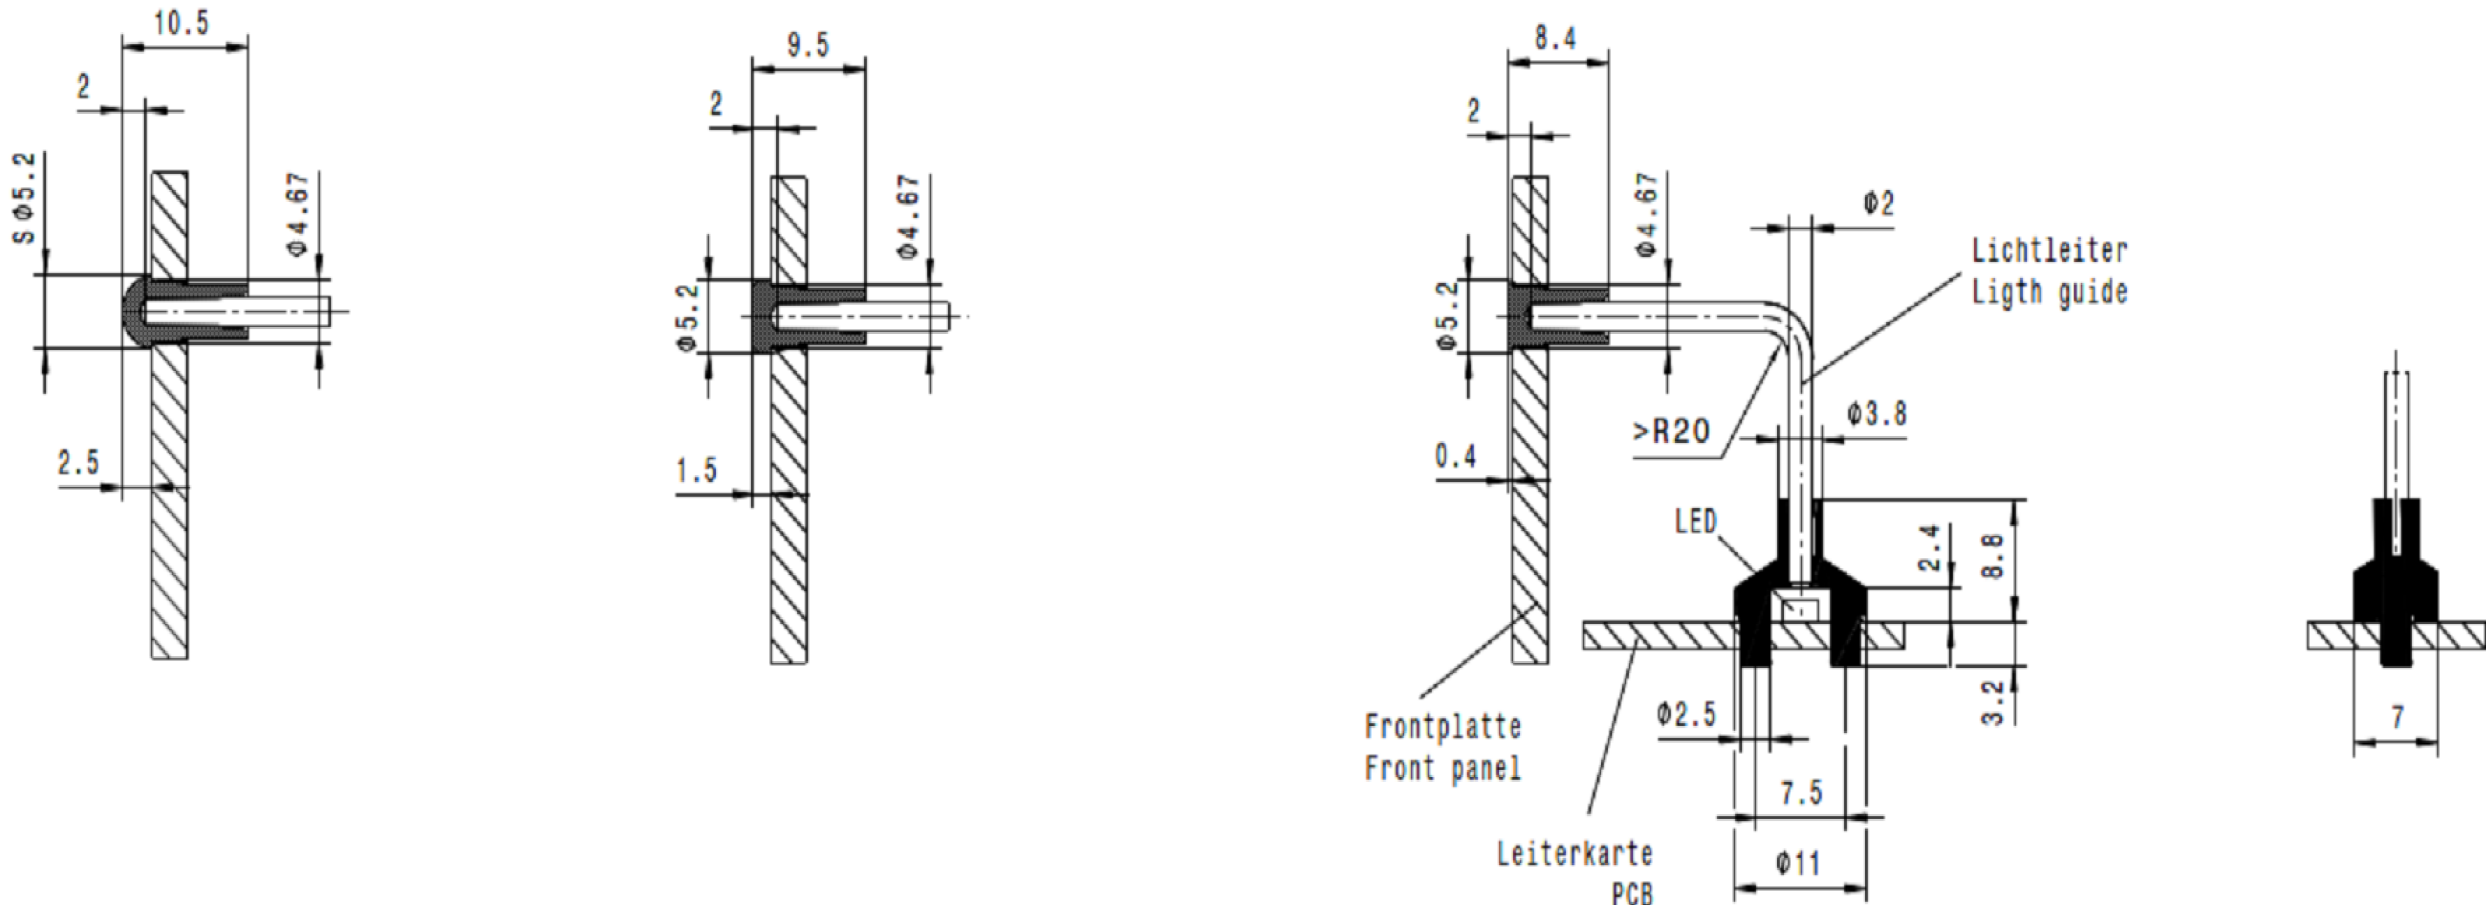

General Information:
IP protection class: IP68
Web: www.phoenixcontact.com webcode:#1638

Additional information:
a. Pad for SMD-LED
(max. LED height 2,1mm)
Thickness of front panel: ≥ 1

LED types: LS T670; LSG T670; LY T676

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	LENS	PC
2	1	LIGHT CONDUCTOR	PUMMA
3	1	HOUSING	PC
document-no. / article-no.		scale	Simplified representation - Document excluded from change process - Linear dimensions [mm]
01485811 / 001474449		5:1	
date		document-type	
14.10.2022		TECDOC 2D_Productdrawing	
description		HS LC-F-SP-5,2X2-150	
page 1	of 1		