


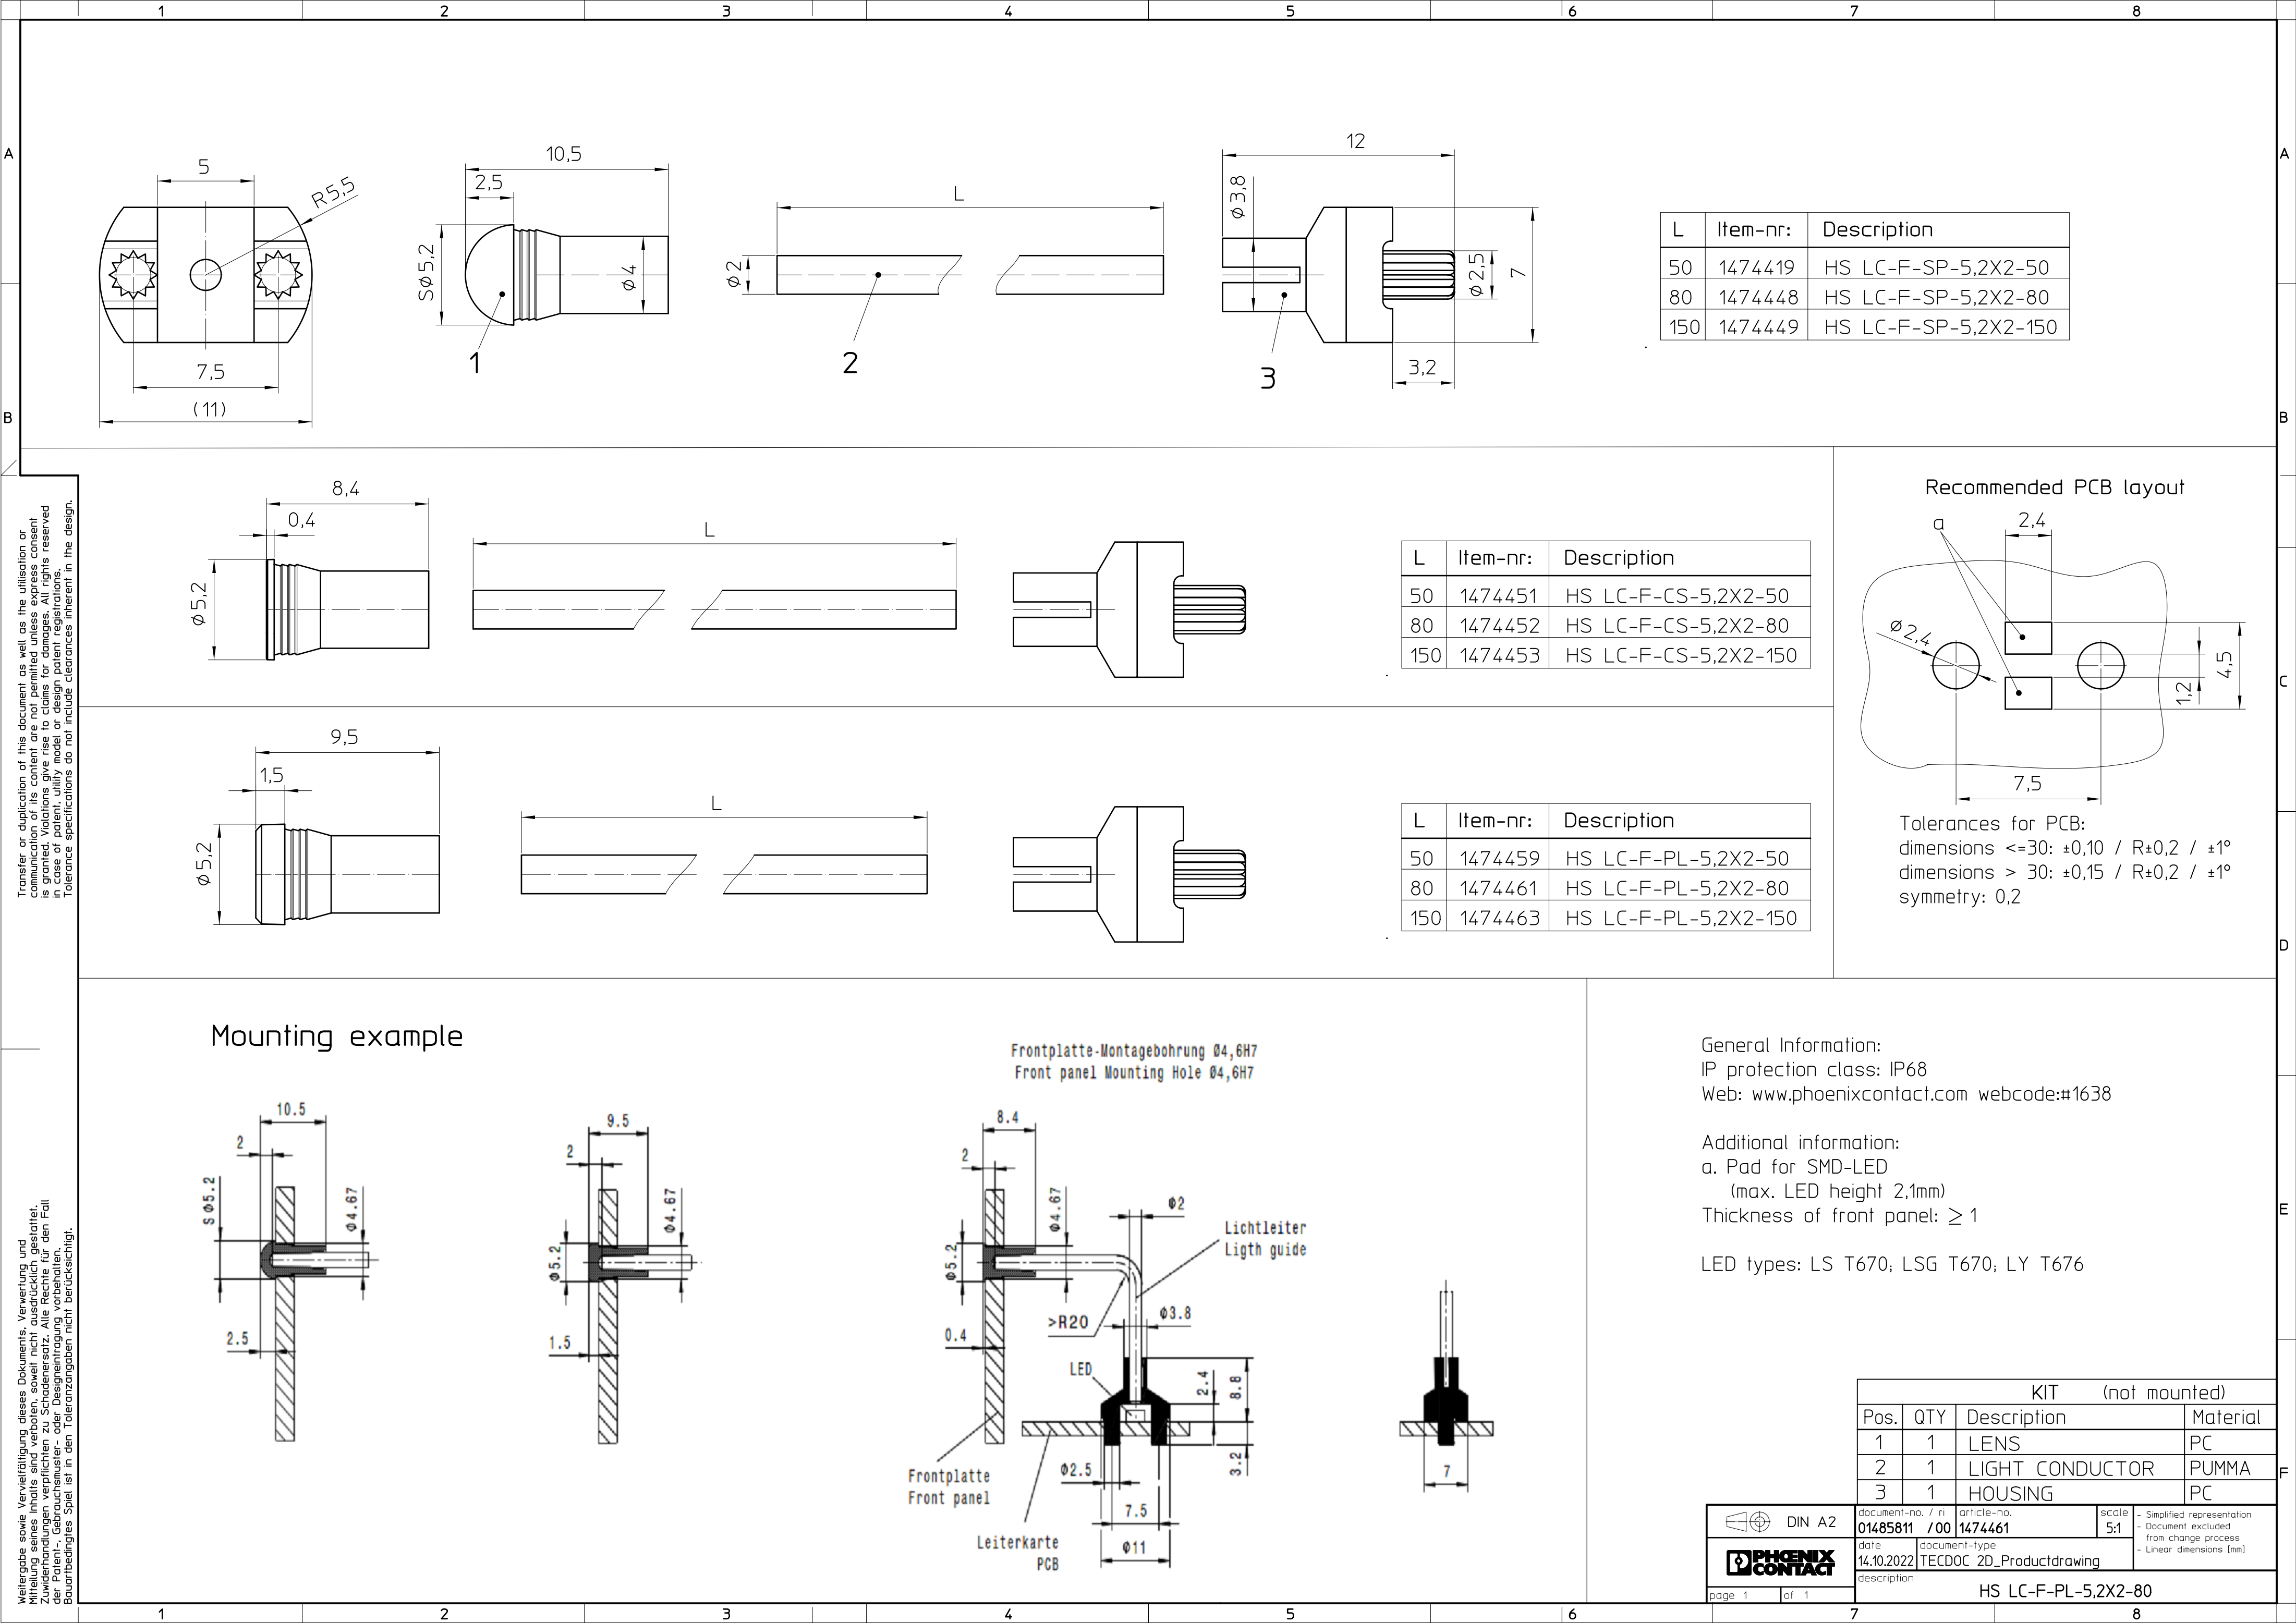

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

General Information:
IP protection class: IP68
Web: www.phoenixcontact.com webcode:#1638

Additional information:
a. Pad for SMD-LED
(max. LED height 2,1mm)
Thickness of front panel: ≥ 1

LED types: LS T670; LSG T670; LY T676

KIT (not mounted)					
Pos.	QTY	Description	Material		
1	1	LENS	PC		
2	1	LIGHT CONDUCTOR	PUMMA		
3	1	HOUSING	PC		
 DIN A2		document-no. / ri	article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		01485811 / 00	1474461	5:1	
		date	document-type		
		14.10.2022	TECDOC 2D_Productdrawing		
page 1		description			
of 1		HS LC-F-PL-5,2X2-80			