

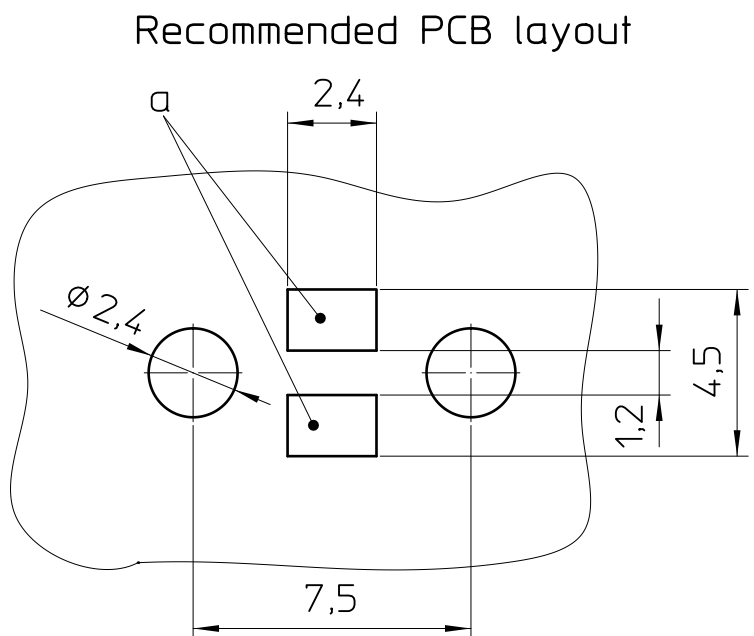
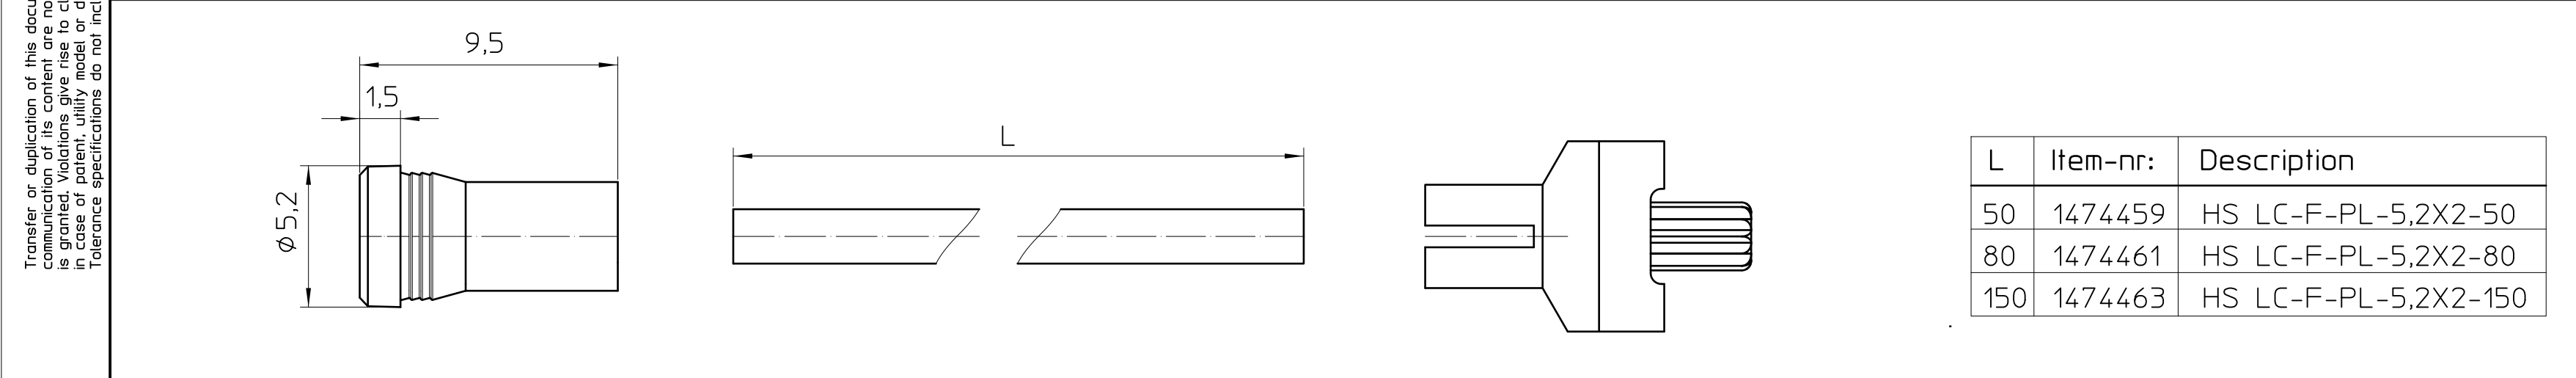
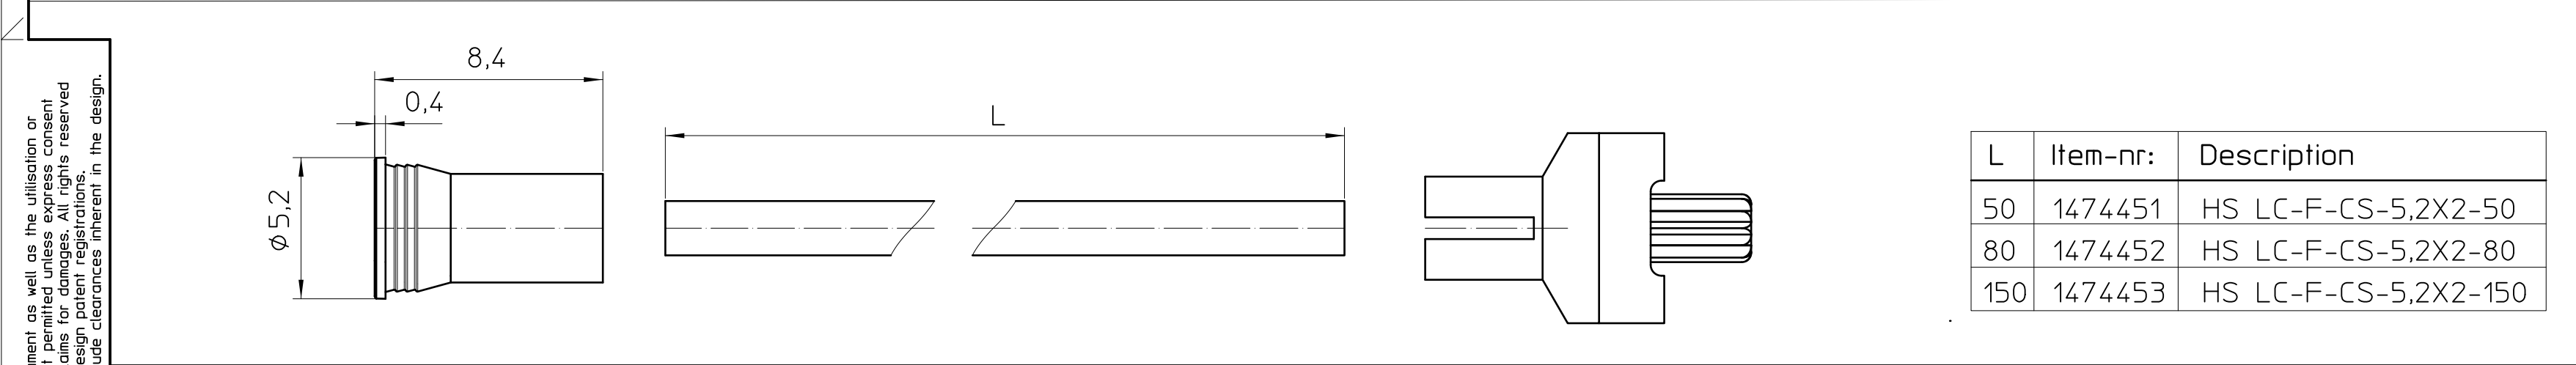


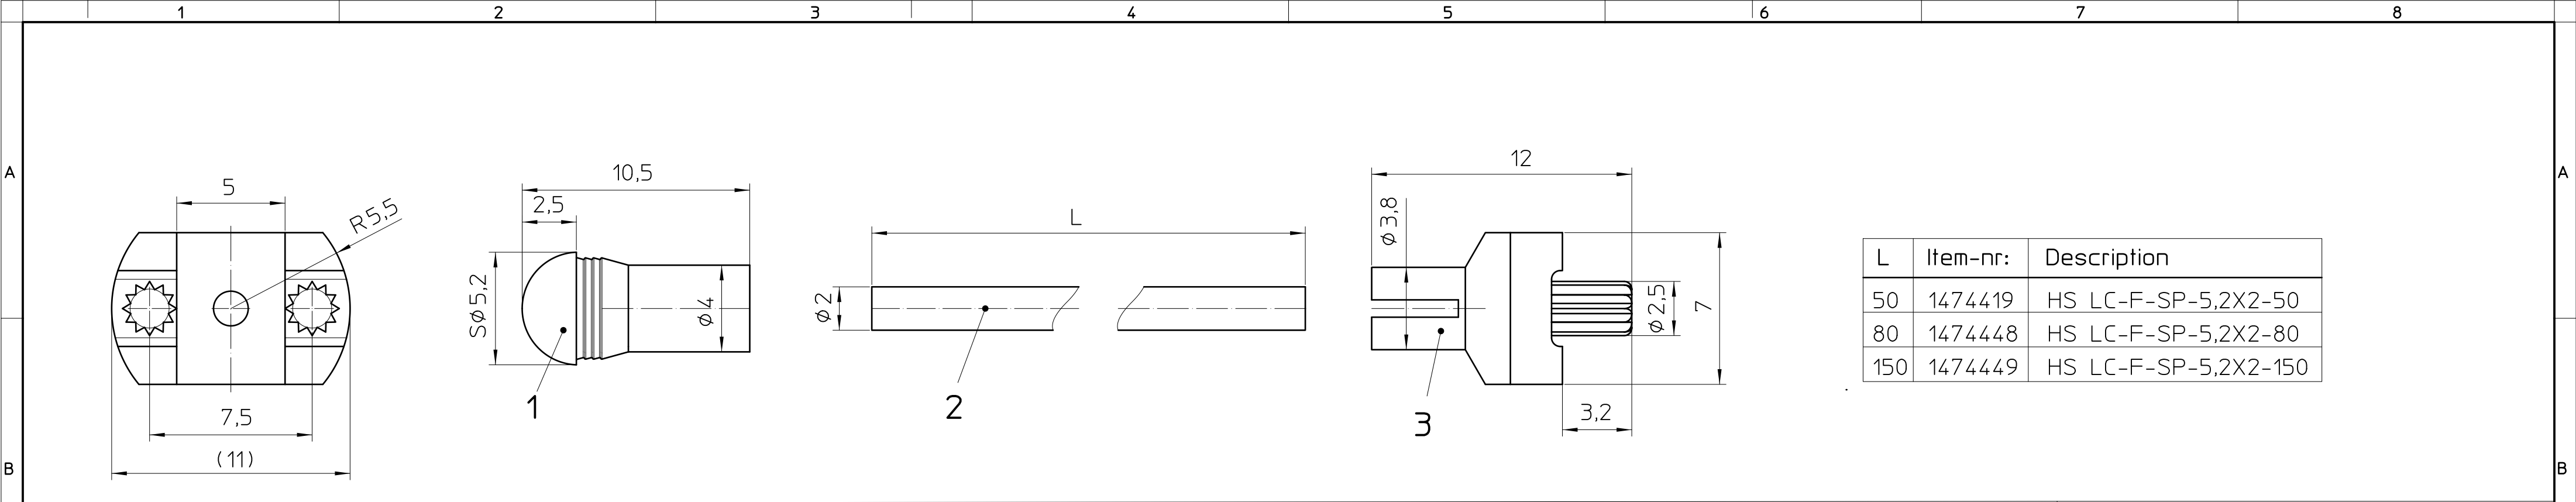

Tolerances for PCB:
dimensions <=30: ±0,10 / R±0,2 / ±1°
dimensions > 30: ±0,15 / R±0,2 / ±1°
symmetry: 0,2

Mounting example

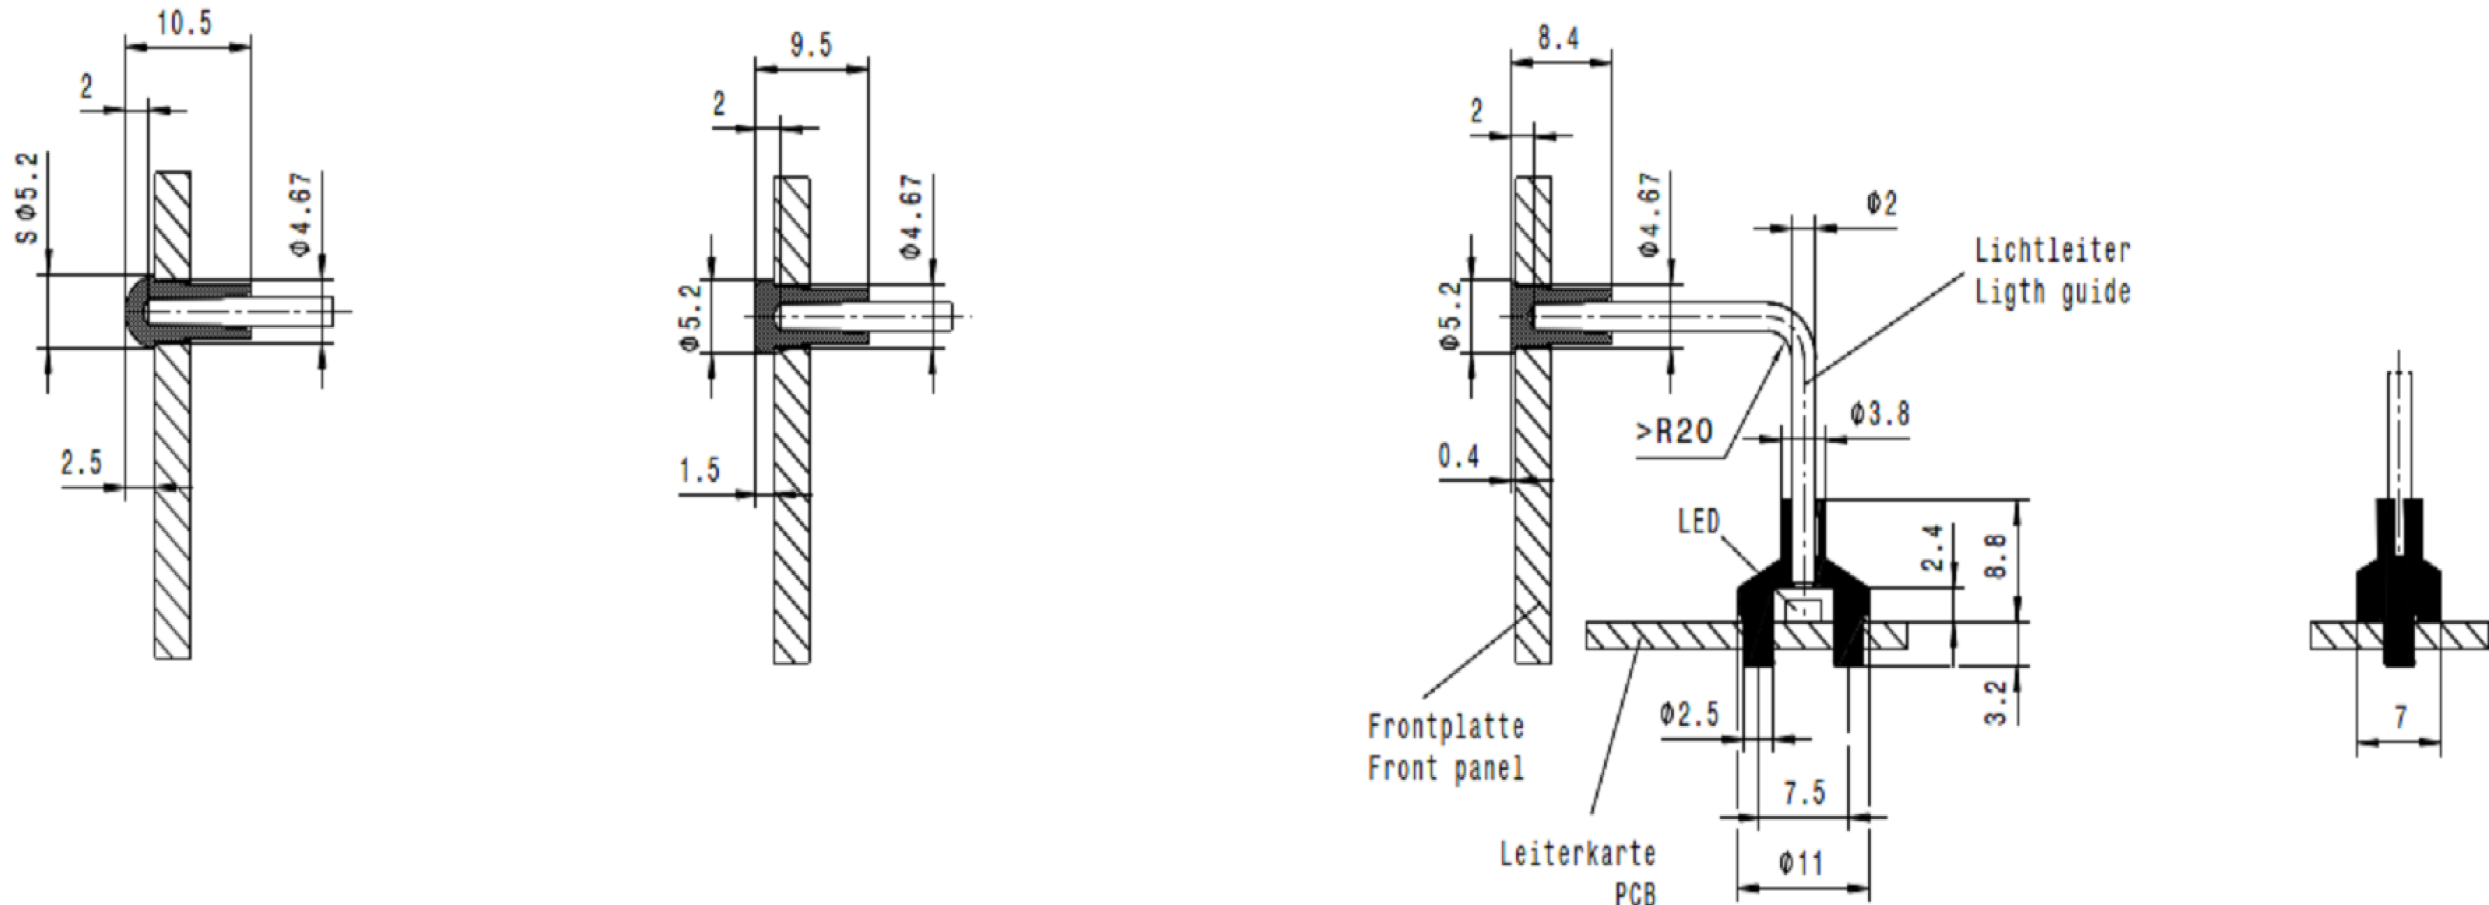

General Information:
IP protection class: IP68
Web: www.phoenixcontact.com webcode:#1638

Additional information:
a. Pad for SMD-LED
(max. LED height 2,1mm)
Thickness of front panel: ≥ 1

LED types: LS T670; LSG T670; LY T676

KIT (not mounted)				
Pos.		QTY	Description	Material
1		1	LENS	PC
2		1	LIGHT CONDUCTOR	PUMMA
3		1	HOUSING	PC
 DIN A2		document-no. / ri article-no. 01485811 / 00 1474463		scale 5:1
		date document-type 14.10.2022 TECDOC 2D_Productdrawing		- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		description		
page 1 of 1		HS LC-F-PL-5,2X2-150		