
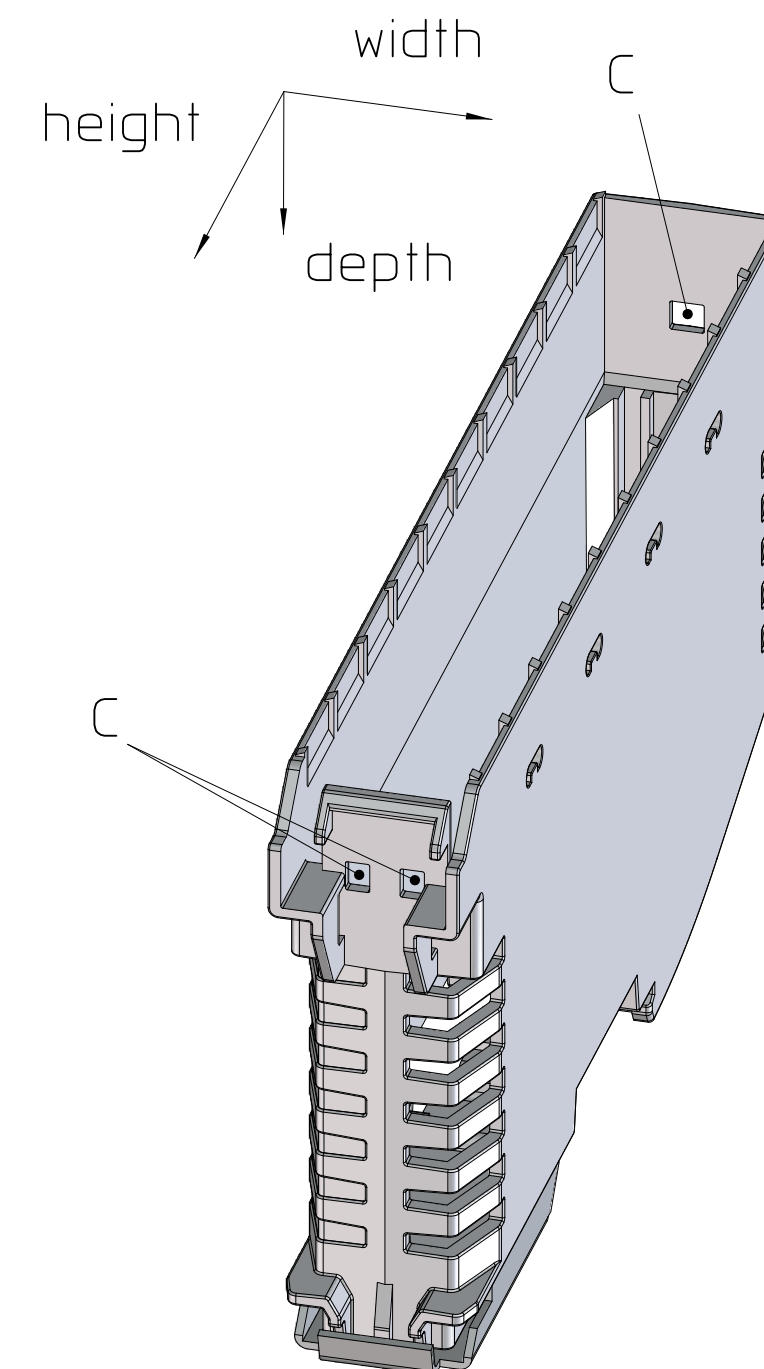


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts, sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

Bearbeitungsgang

Beurteilungsbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

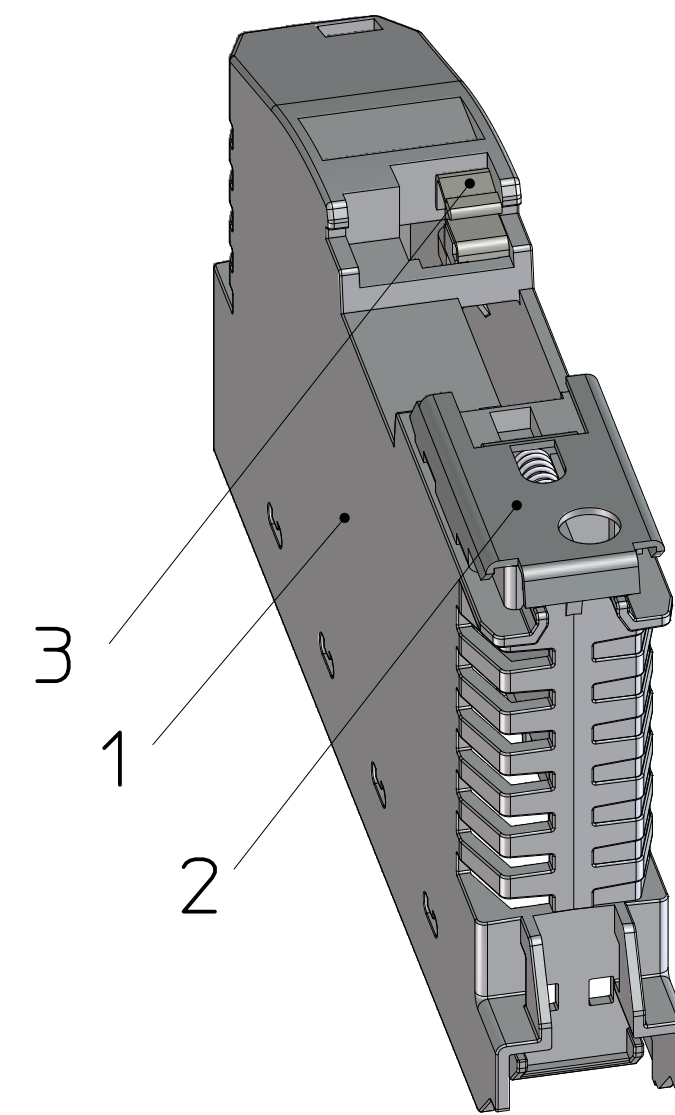

- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2 PA plastic parts with about 2% (% by weight) moisture content.
- In case of distortion there is no functional impact of the single part in the application.
- Web: www.phoenixcontact.com webcode: #0308

- A. PCB $t=1,6\pm0,2$
- B. Mounting rail like EN 60715: TH 35-7,5 or mounting rail TH 35-15x1,5 similar to EN 60715
- C. Opening for fixing ME-I/O Cover...
- D. Guidance slot for TBUS..
- E. PCB Fixing

 = Workpiece zero point for mechanical processing

Pos.	QTY	description	material	 DIN A3 	document-no. / ri 00907928 / 04		article-no. 1486138	scale 1:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]	
1	1	HOUSING	PA		date 28.04.2025	document-type TECDOC 2D_Productdrawing				
2	1	FOOT CATCH with SPRING	St, X12CrNi		description					
3	1	FE CONTACT	Cu alloy		page 1	of 2	ME-IO 18,8 B/FE 10U TBUS 5015			

Pos.	QTY	description	material	 DIN A3 	document-no. / ri 00907928 / 04		article-no. 1486138	scale 1:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]	
1	1	HOUSING	PA		date 28.04.2025	document-type TECDOC 2D_Productdrawing				
2	1	FOOT CATCH with SPRING	St, X12CrNi		description					
3	1	FE CONTACT	Cu alloy		page 1	of 2	ME-IO 18,8 B/FE 10U TBUS 5015			

A

B

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

A

B


C

D


E

F

Marking area

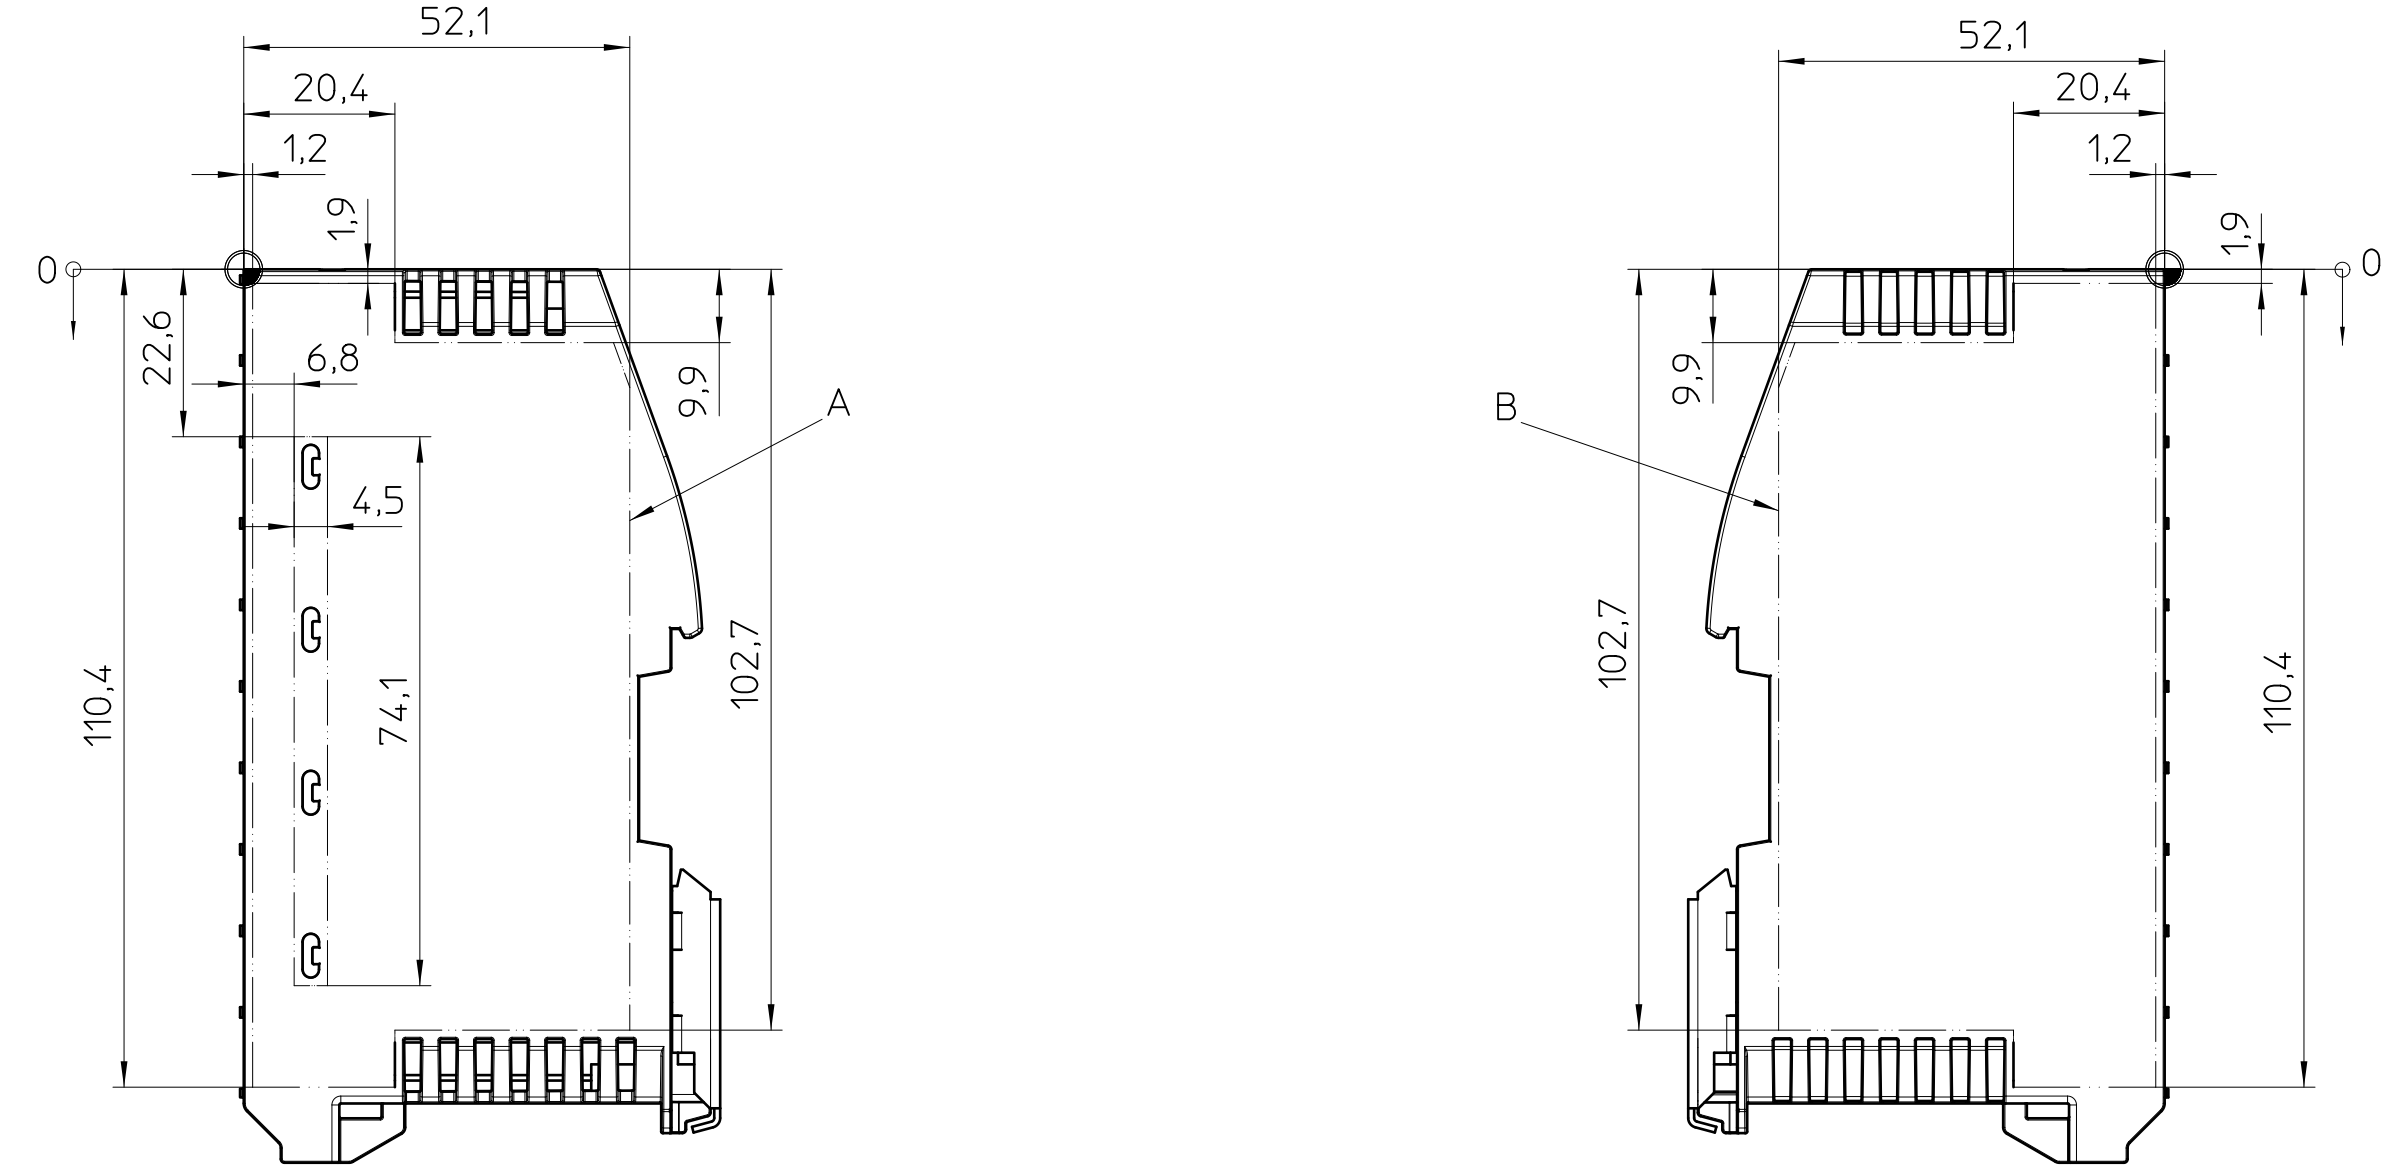

Machining area

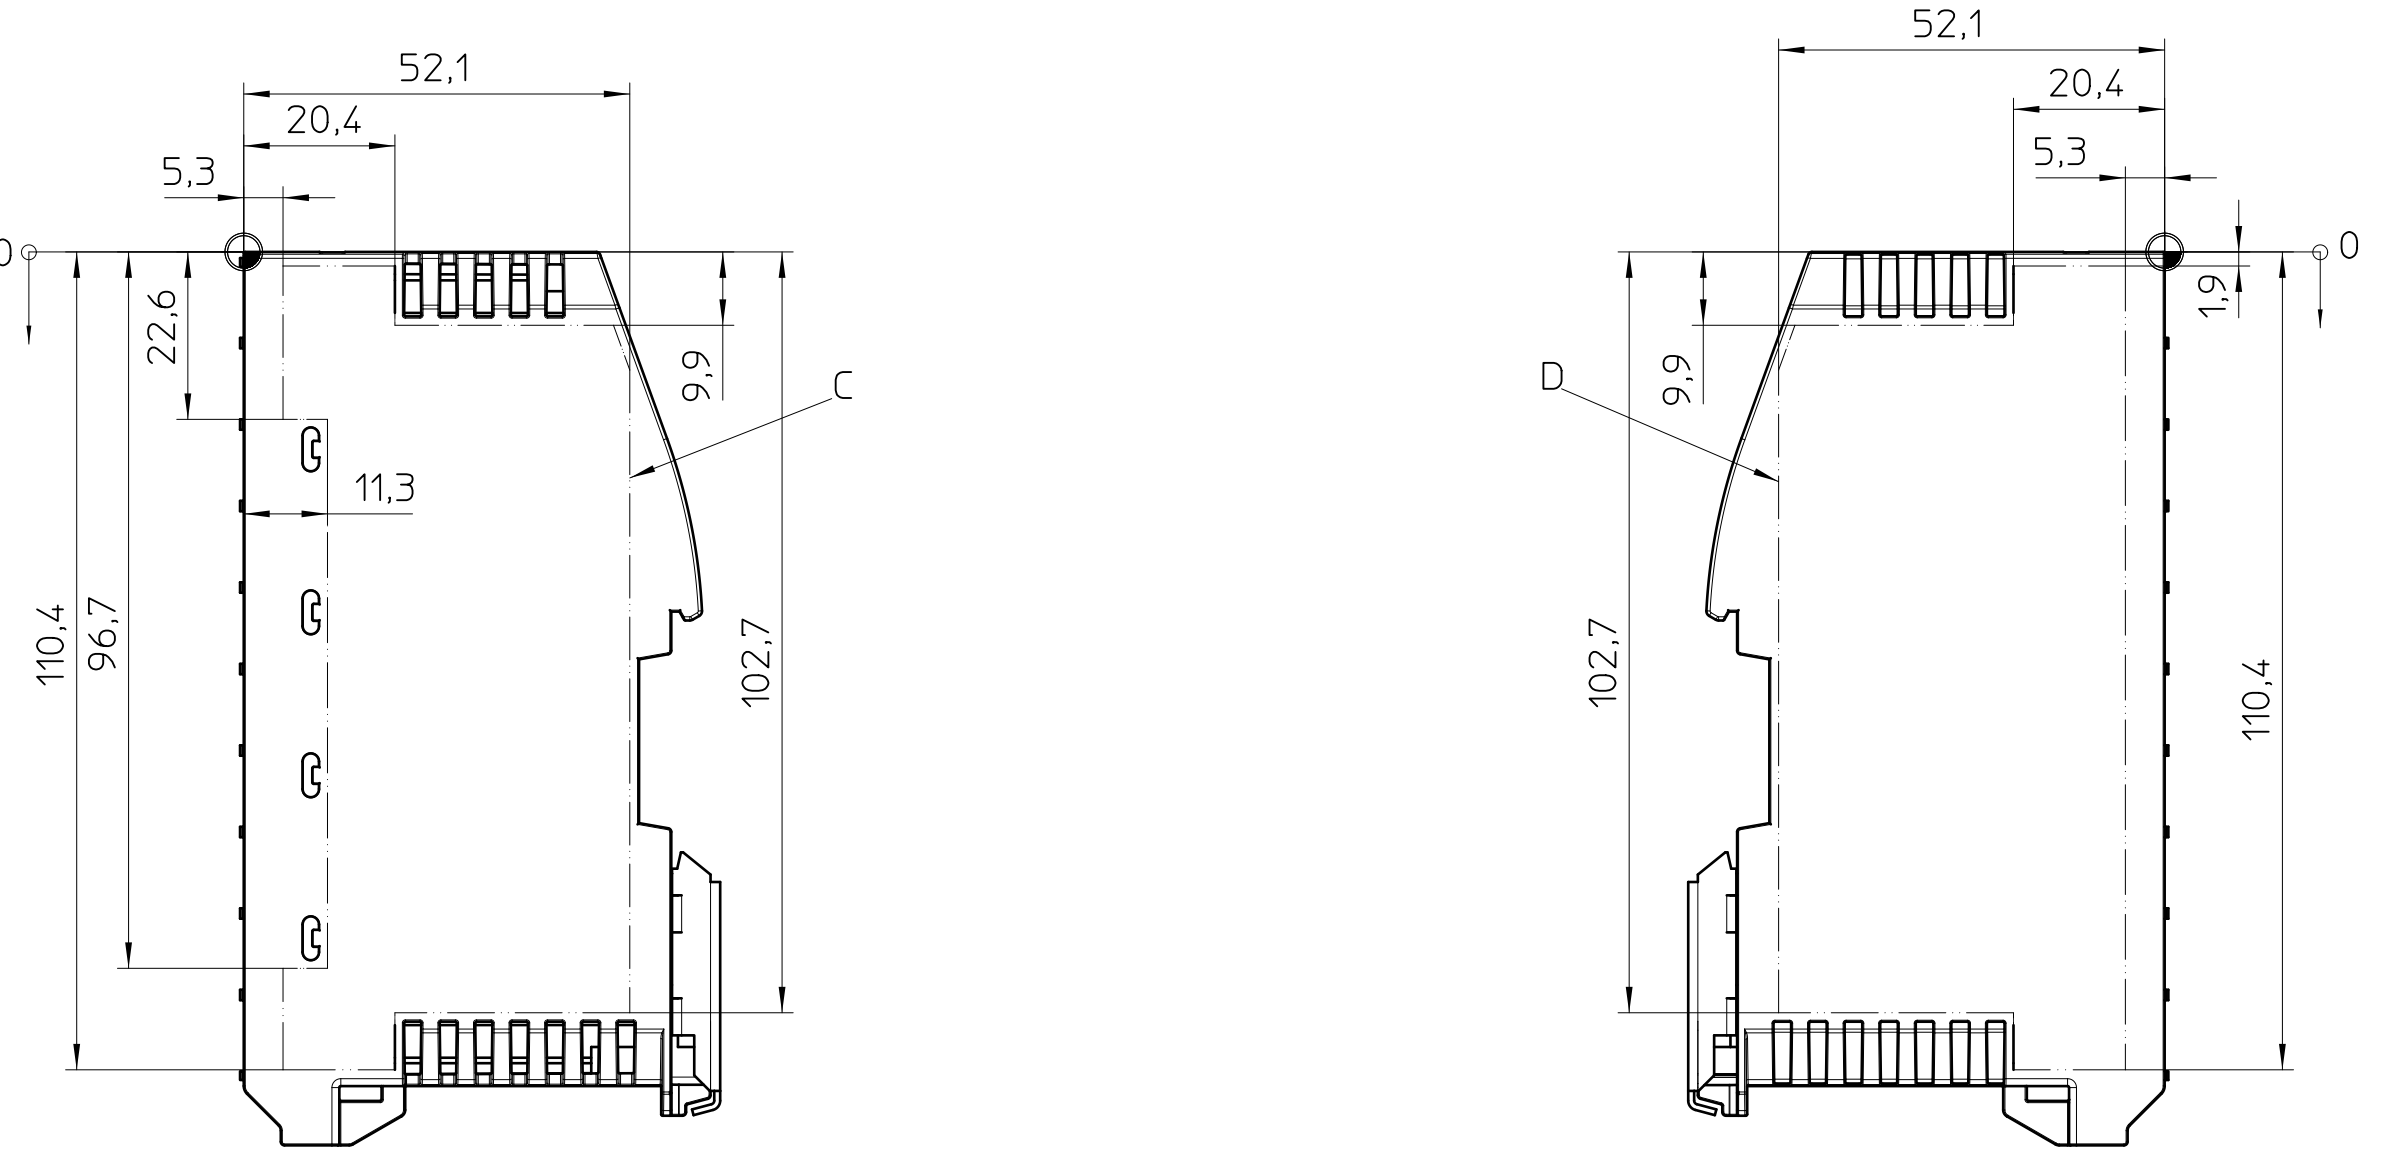

- General Information:
- Simplified representation
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 -  Workpiece zero point for mechanical processing
 - Tolerances for marking and machining DIN ISO 2768-m
 - For milling > 50% of the machining area, the machinability should be verified.
 - In case of distortion there is no functional impact of the single part in the application.
 - Web: www.phoenixcontact.com webcode: #1635

- Additional Information:
- A. Max. marking area right
 - B. Max. marking area left
 - C. Max. machining area right
 - D. Max. machining area left

 DIN A2	document-No. / RI 00907928 / 04	date 28.04.2025	scale 1:1
	ident.-No. 1486138	document-type TECDOC 2D_Productdrawing	
page 2 of 2	description ME-IO 18,8 B/FE 10U TBUS 5015		