

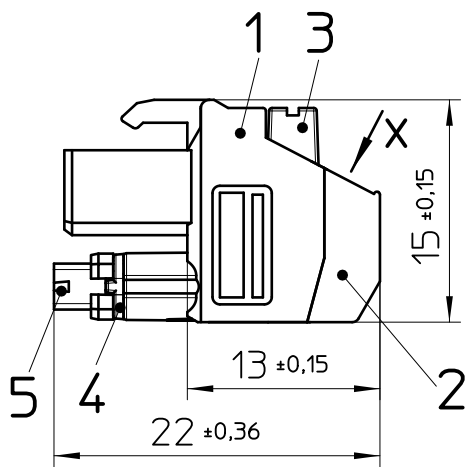
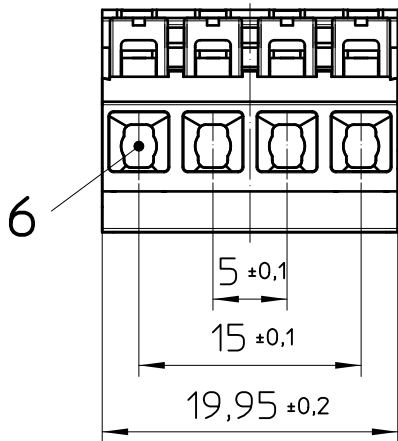
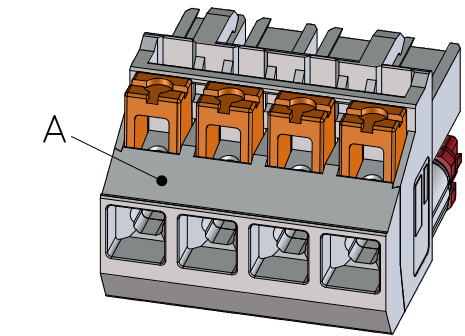
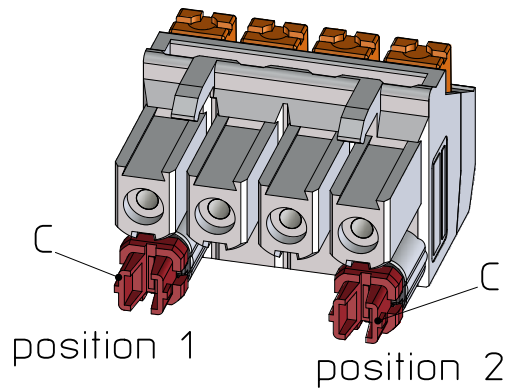


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

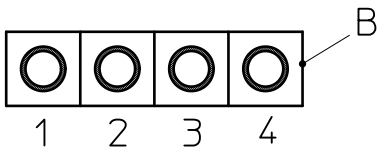

view X

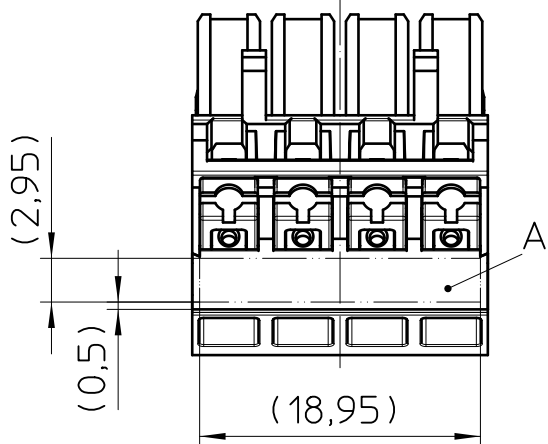

5:1

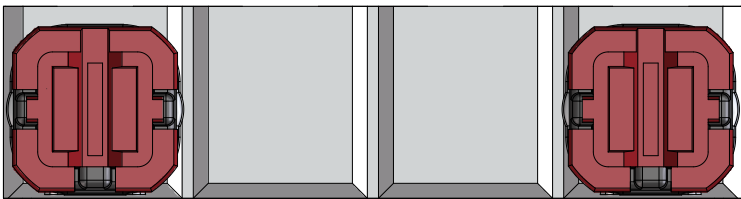

A position 1 position 2

Pos.	QTY	Description	Material
1	1	HOUSING	PA
2	1	COVER	PA
3	4	SPRING OPENER	PBT
4	2	CODING-PLUG	PA
5	2	CODING-HEADER	PA
6	4	PUSH-IN CONTACT	Cu alloy, STL

General Information:

- Corresponding header ICC25-H/4L/R5,0
- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Web: www.phoenixcontact.com webcode: #1635


Additional Information:

A) Marking area

B) Contact type

schematic symbol	description	electrical symbol
	single contact	
	without contact	

C) Coding adjustment with screwdriver
e.g. 1205037 - SZS 0,4X2,5 VDE

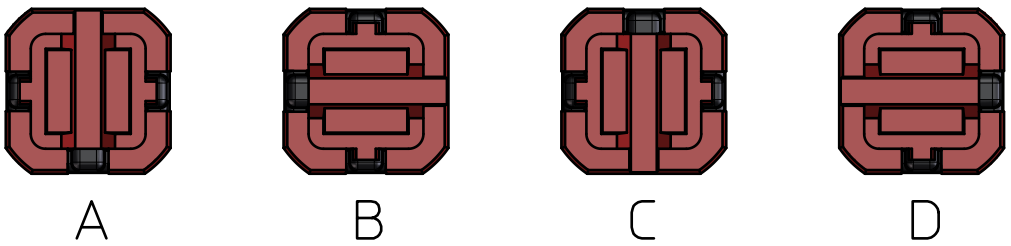

Example : ICC25-PPC2,5/4-5,0- CB

position 1 position 2



page 1 of 1

document-no. / ri article-no.
01251060 / 08 1489730

date document-type
28.11.2022

description
ICC25-PPC2,5/4-5,0-AA-9005 TP:1-4

scale 2:1
- Simplified representation
- Document excluded from change process
- Linear dimensions [mm]