



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

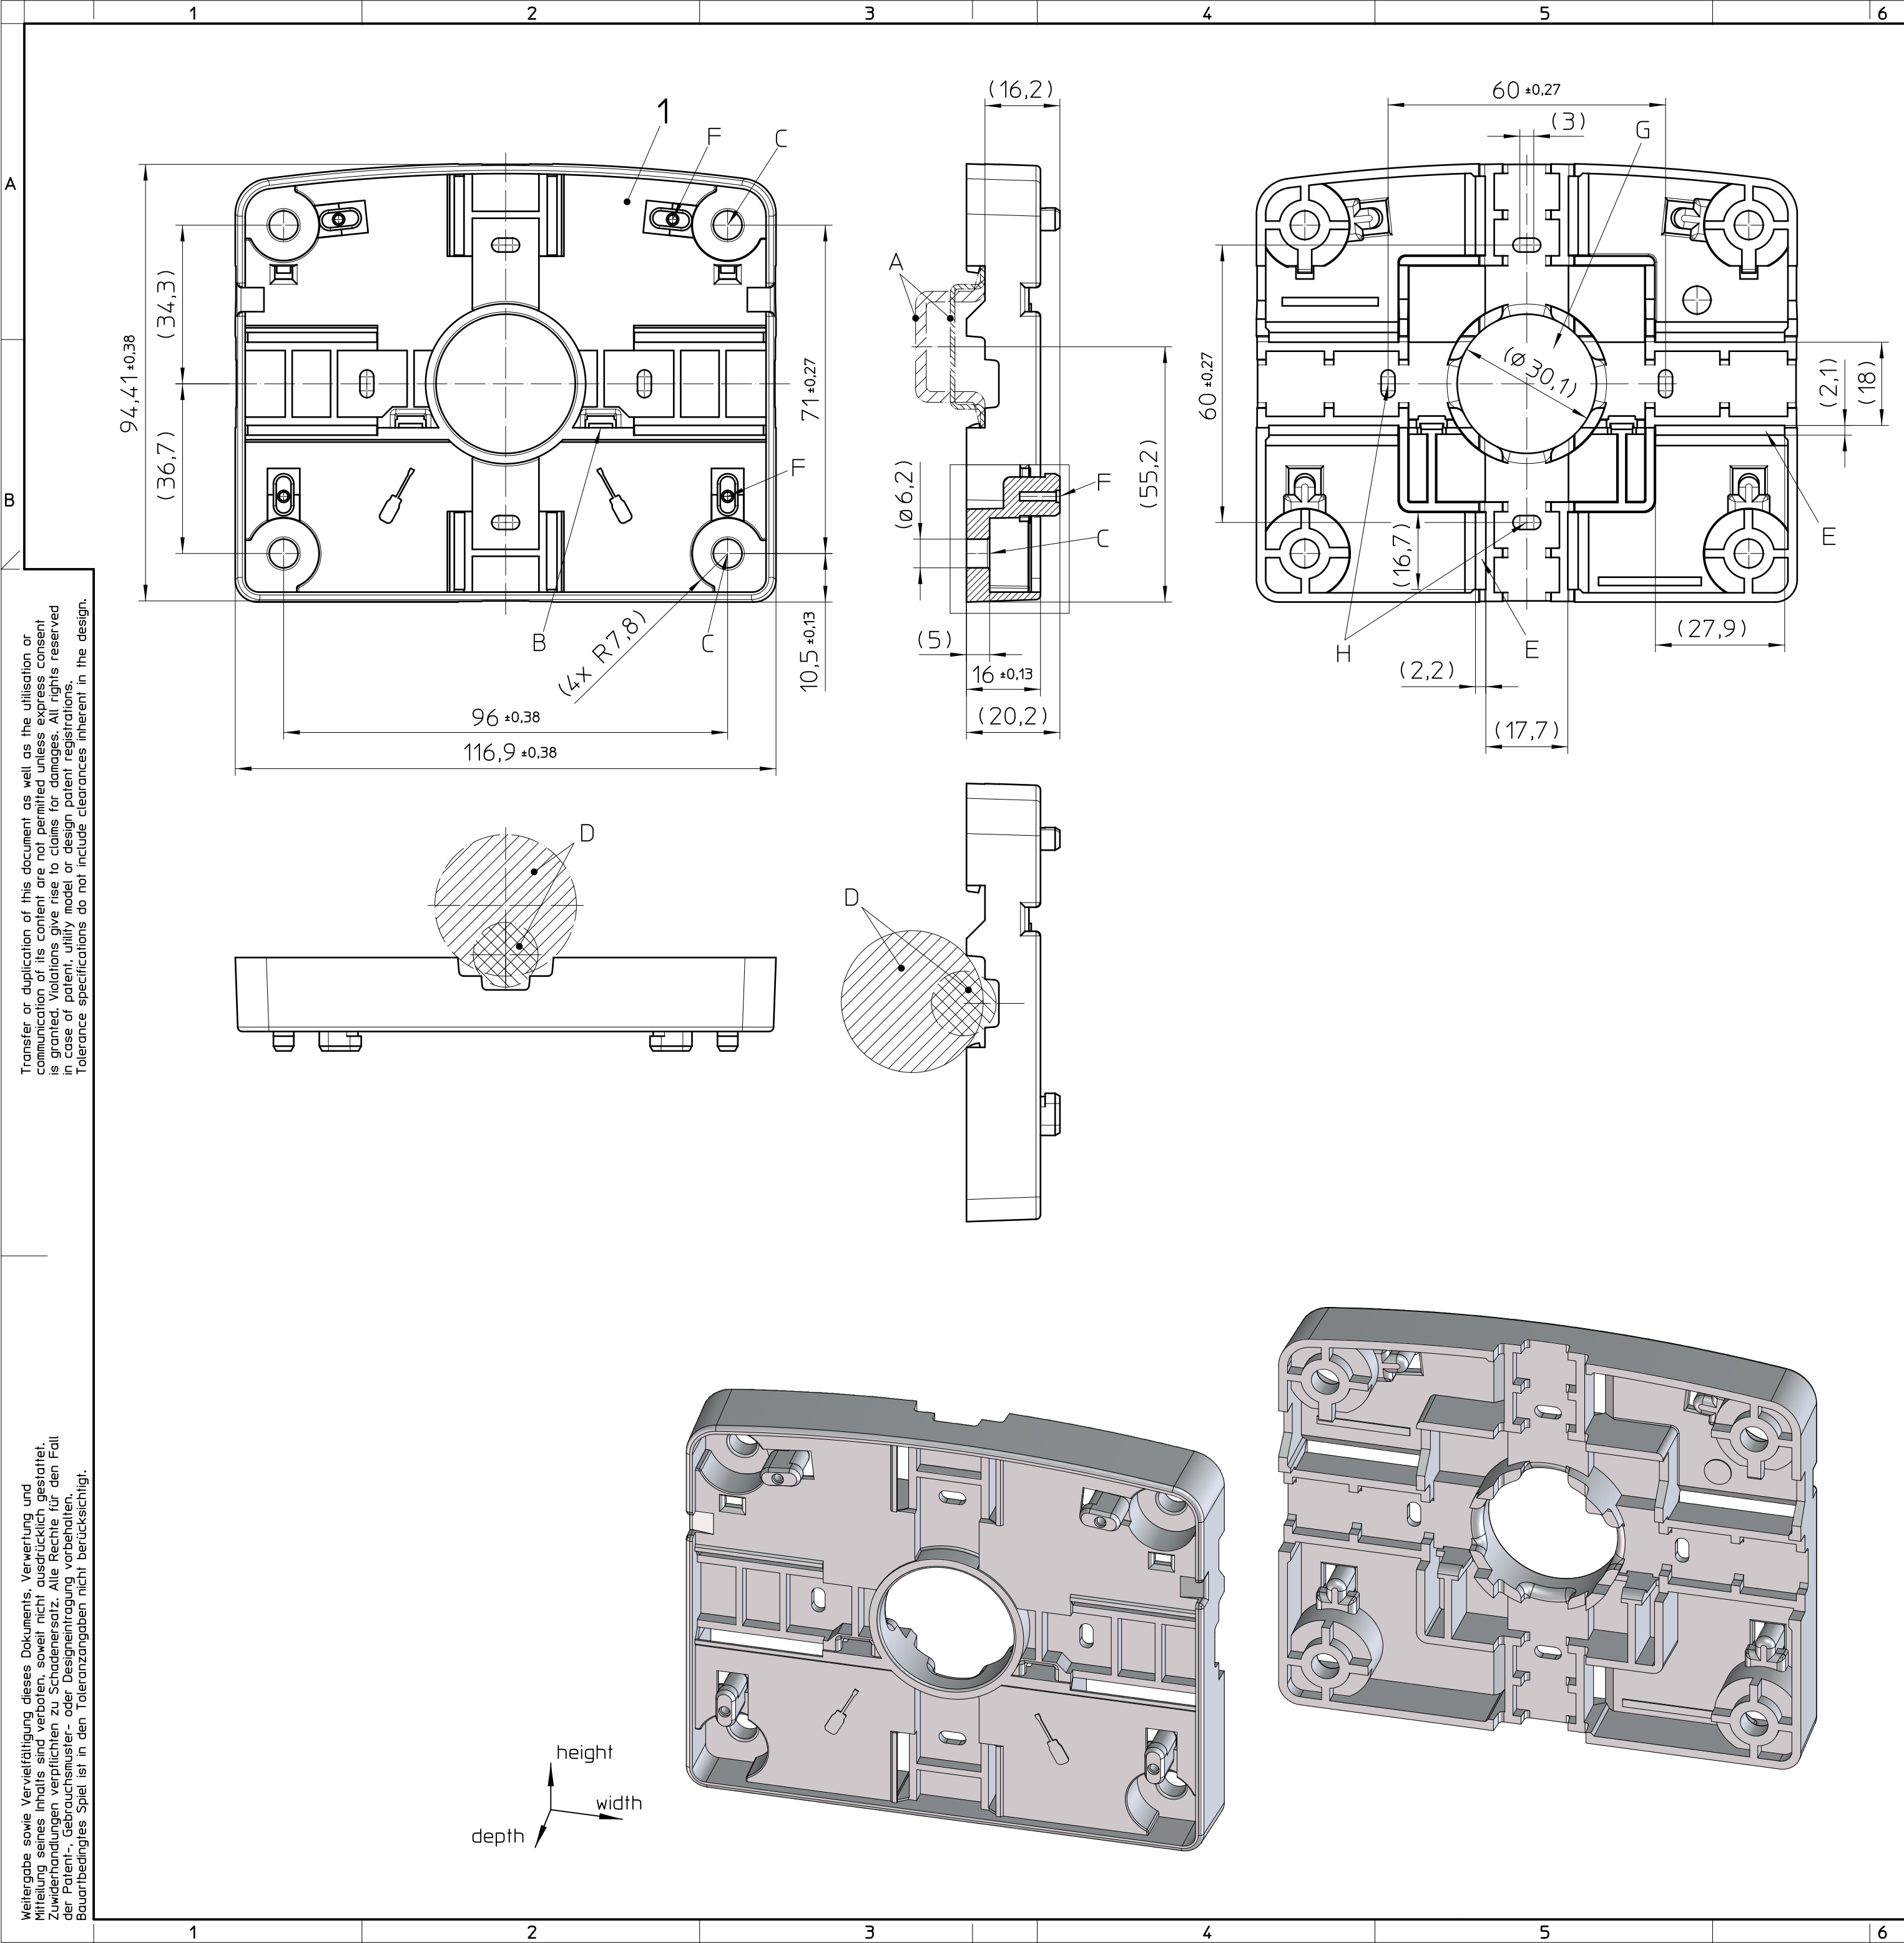

Assembly example

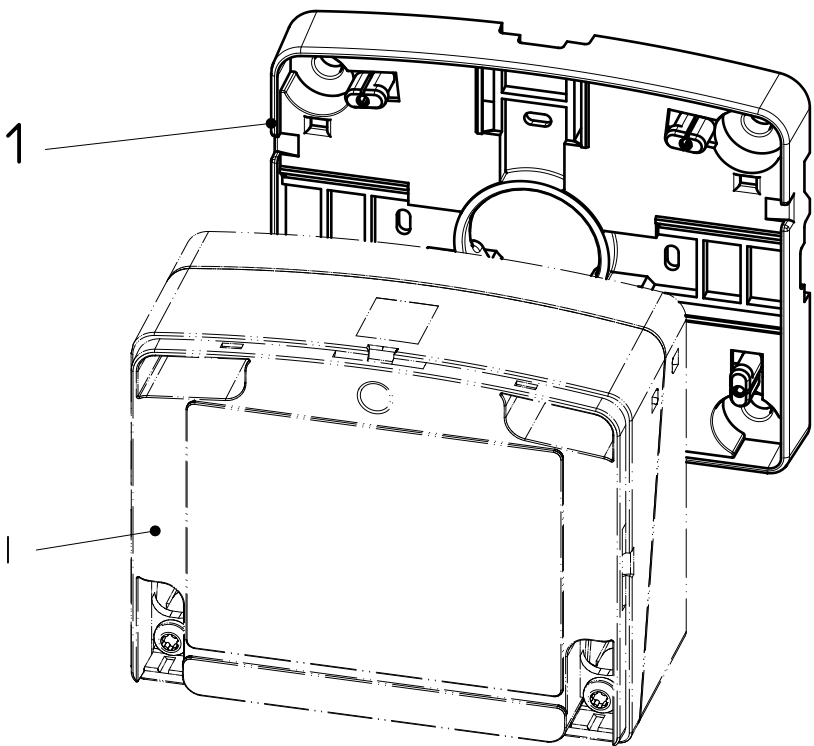

- General Information:
- Simplified representations are shown in gray.
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 1,7% (% by weight) moisture content.
 - Web: www.phoenixcontact.com
- Additional Information:
- A. DIN Rail NS 35
 - B. Release DIN rail (DIN rail snap) with screwdriver min. 3.5 mm (e.g. SZF 1 or SZF 2)
 - C. Screw hole max. M6 for wall and profile mounting
 - D. Pipe/Pole: suitable diameter 15–200 mm
 - E. Optional steel clamp fixing (pole/pipe mounting)
 - F. Lock function with additional screws (item number:1524149)
 - G. Through hole e.g. cable entry
 - H. Holes for flush-mounted box
 - I. Corresponding Housing

Pos.	QTY	Description	Material
1	1	ADAPTER PLATE	PA GF

	document-no. / n.	article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
	01639868 / 01	1524160	1:1	
	date	document-type		
	29.04.2024	TECDOC 2D_Productdrawing		
page 1	of 1	description MCS-112X90-AP-7035		