

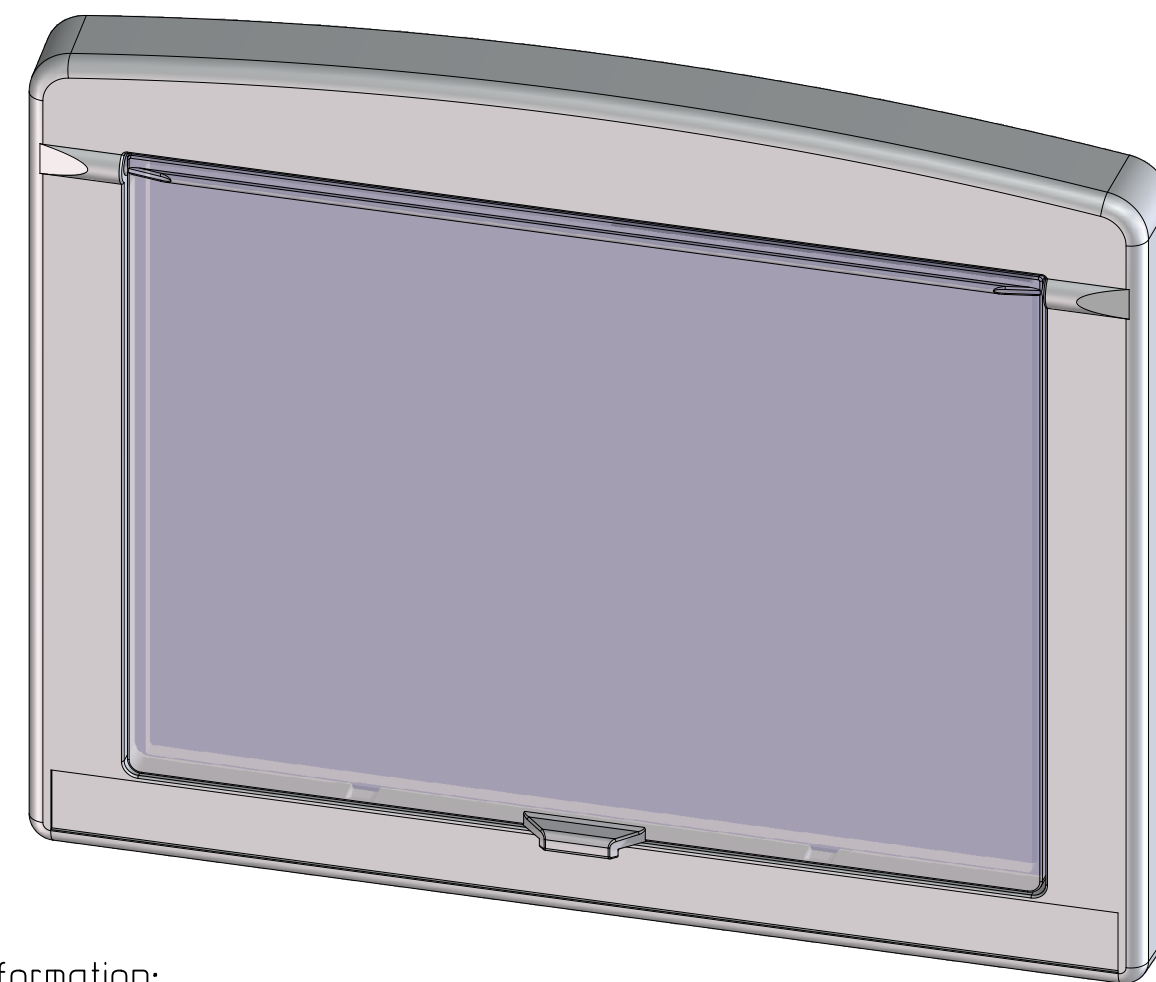

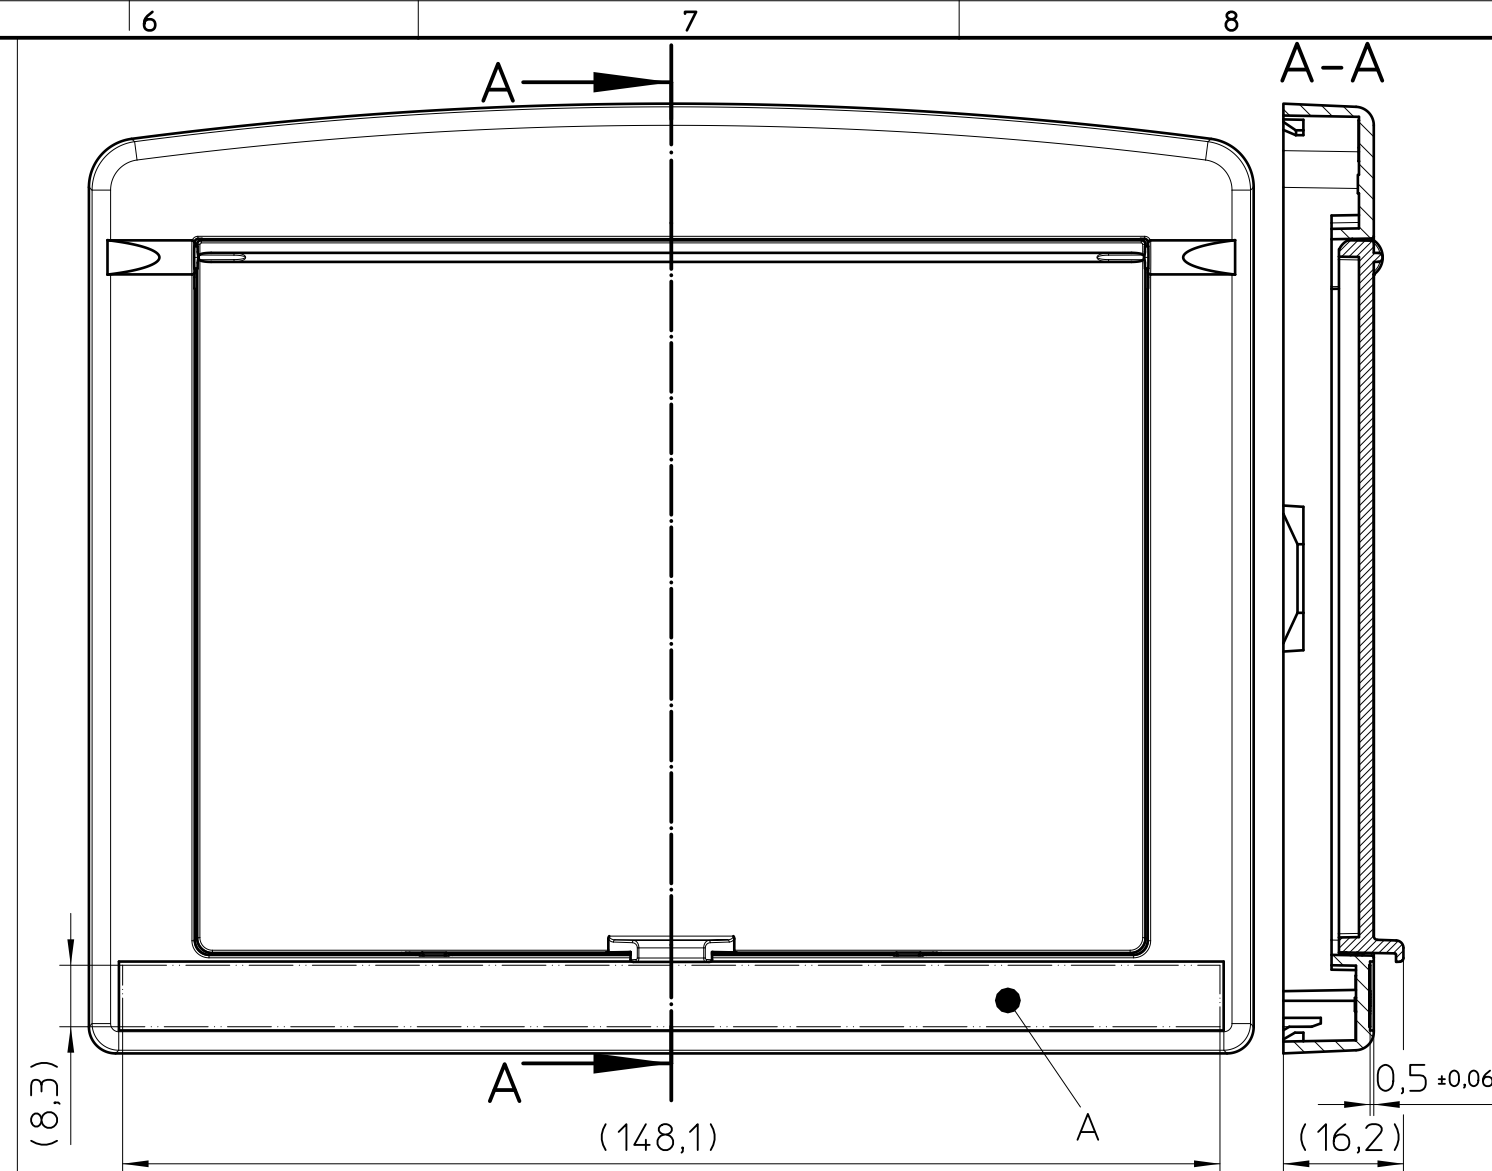



Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

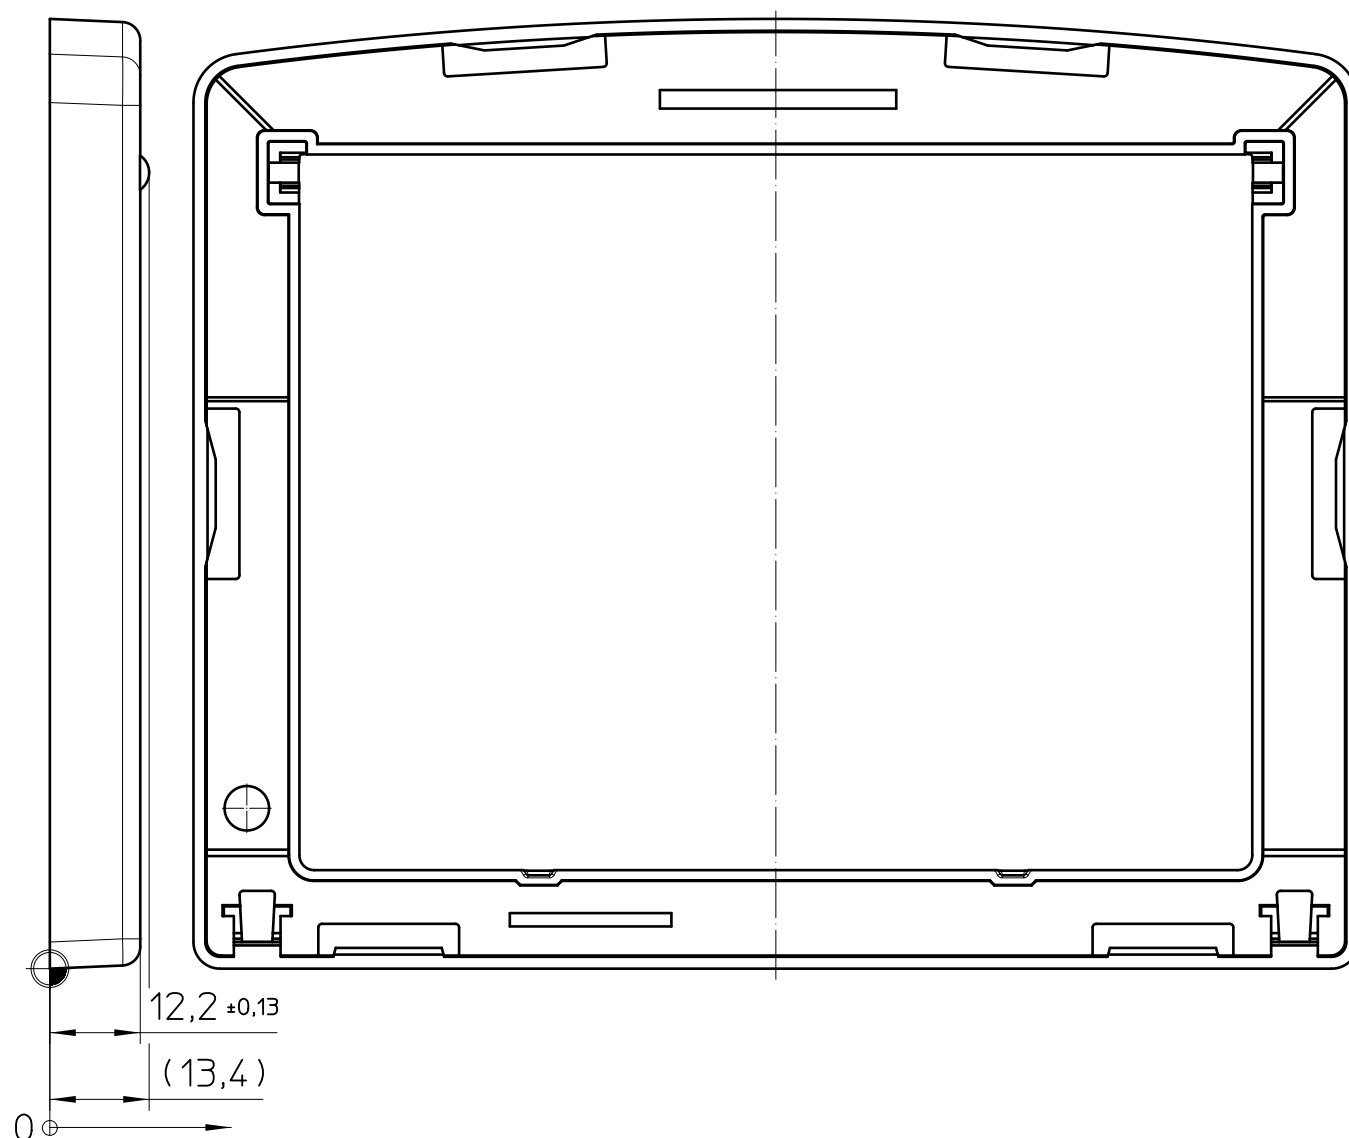


Assembly

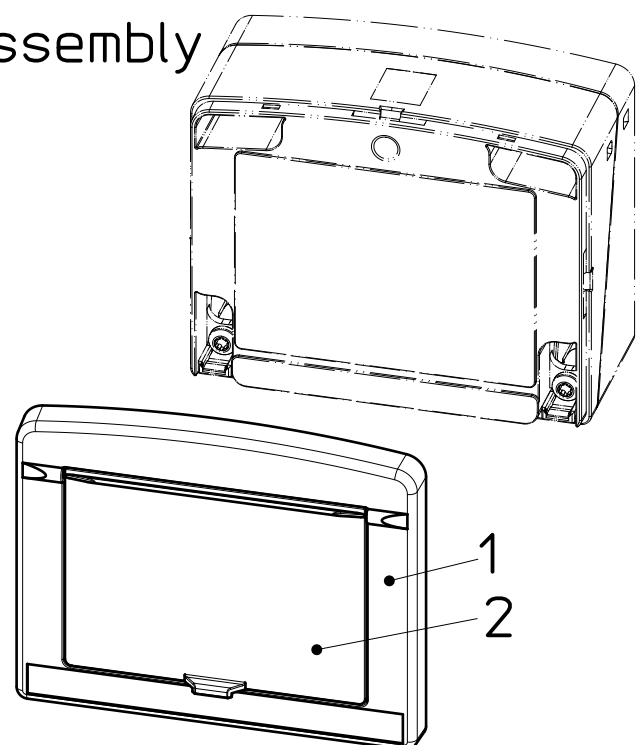

Application

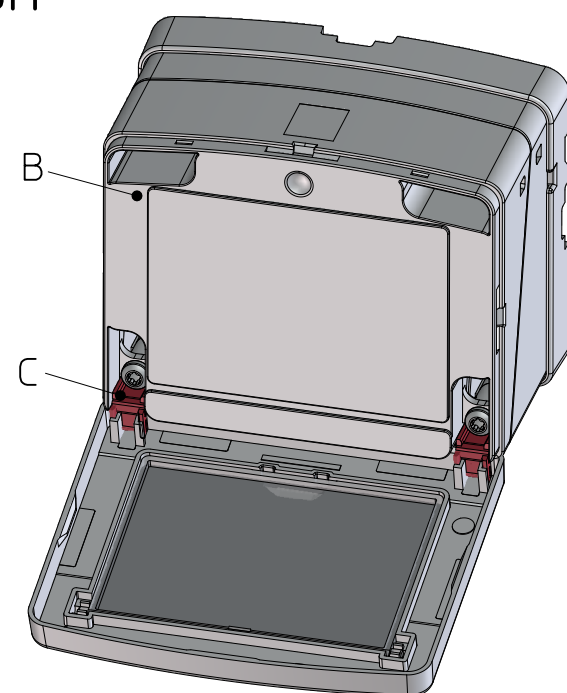

max. lid opening

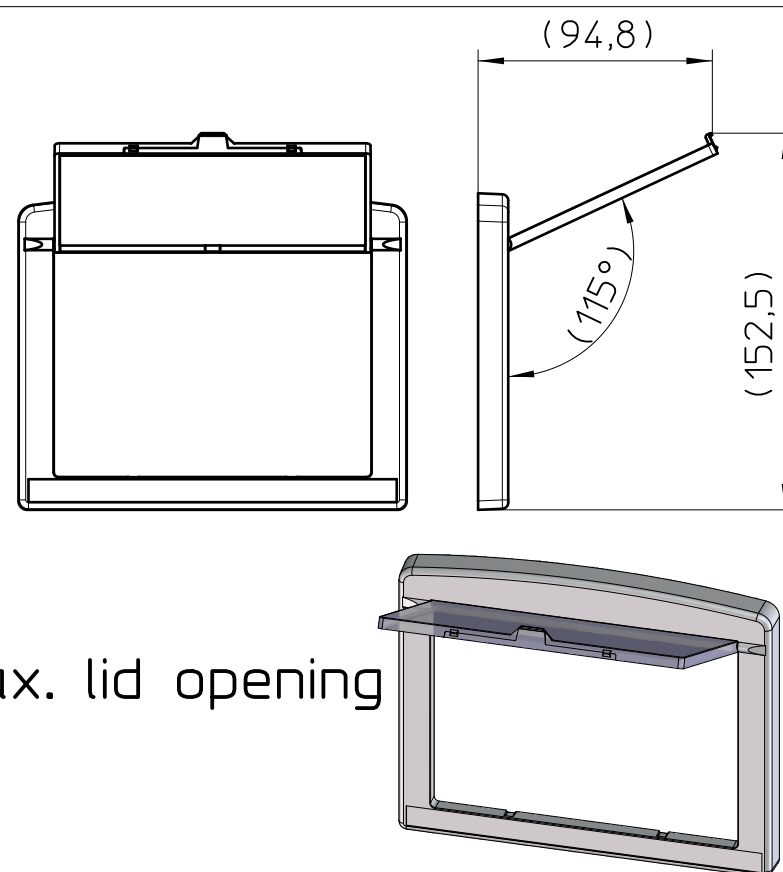

- Simplified representation, exemplary shown in gray.
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 1,7% (% by weight) moisture content.
-  Workpiece zero point for mechanical processing
- Tolerances for printing DIN ISO 2768-m
- Web: www.phoenixcontact.com

- A. Marking area
- B. Housing
- C. Hinge

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	COVER	PA GF
2	1	LID	PC

 DIN A2		document-no. / ri 01662429 / 00	article-no. 1524477	scale 1:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
 PHOENIX CONTACT		date 26.04.2024	document-type TECDOC 2D_Productdrawing		
page 1 of 1		description MCS-156X127-C-S-5015			