


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

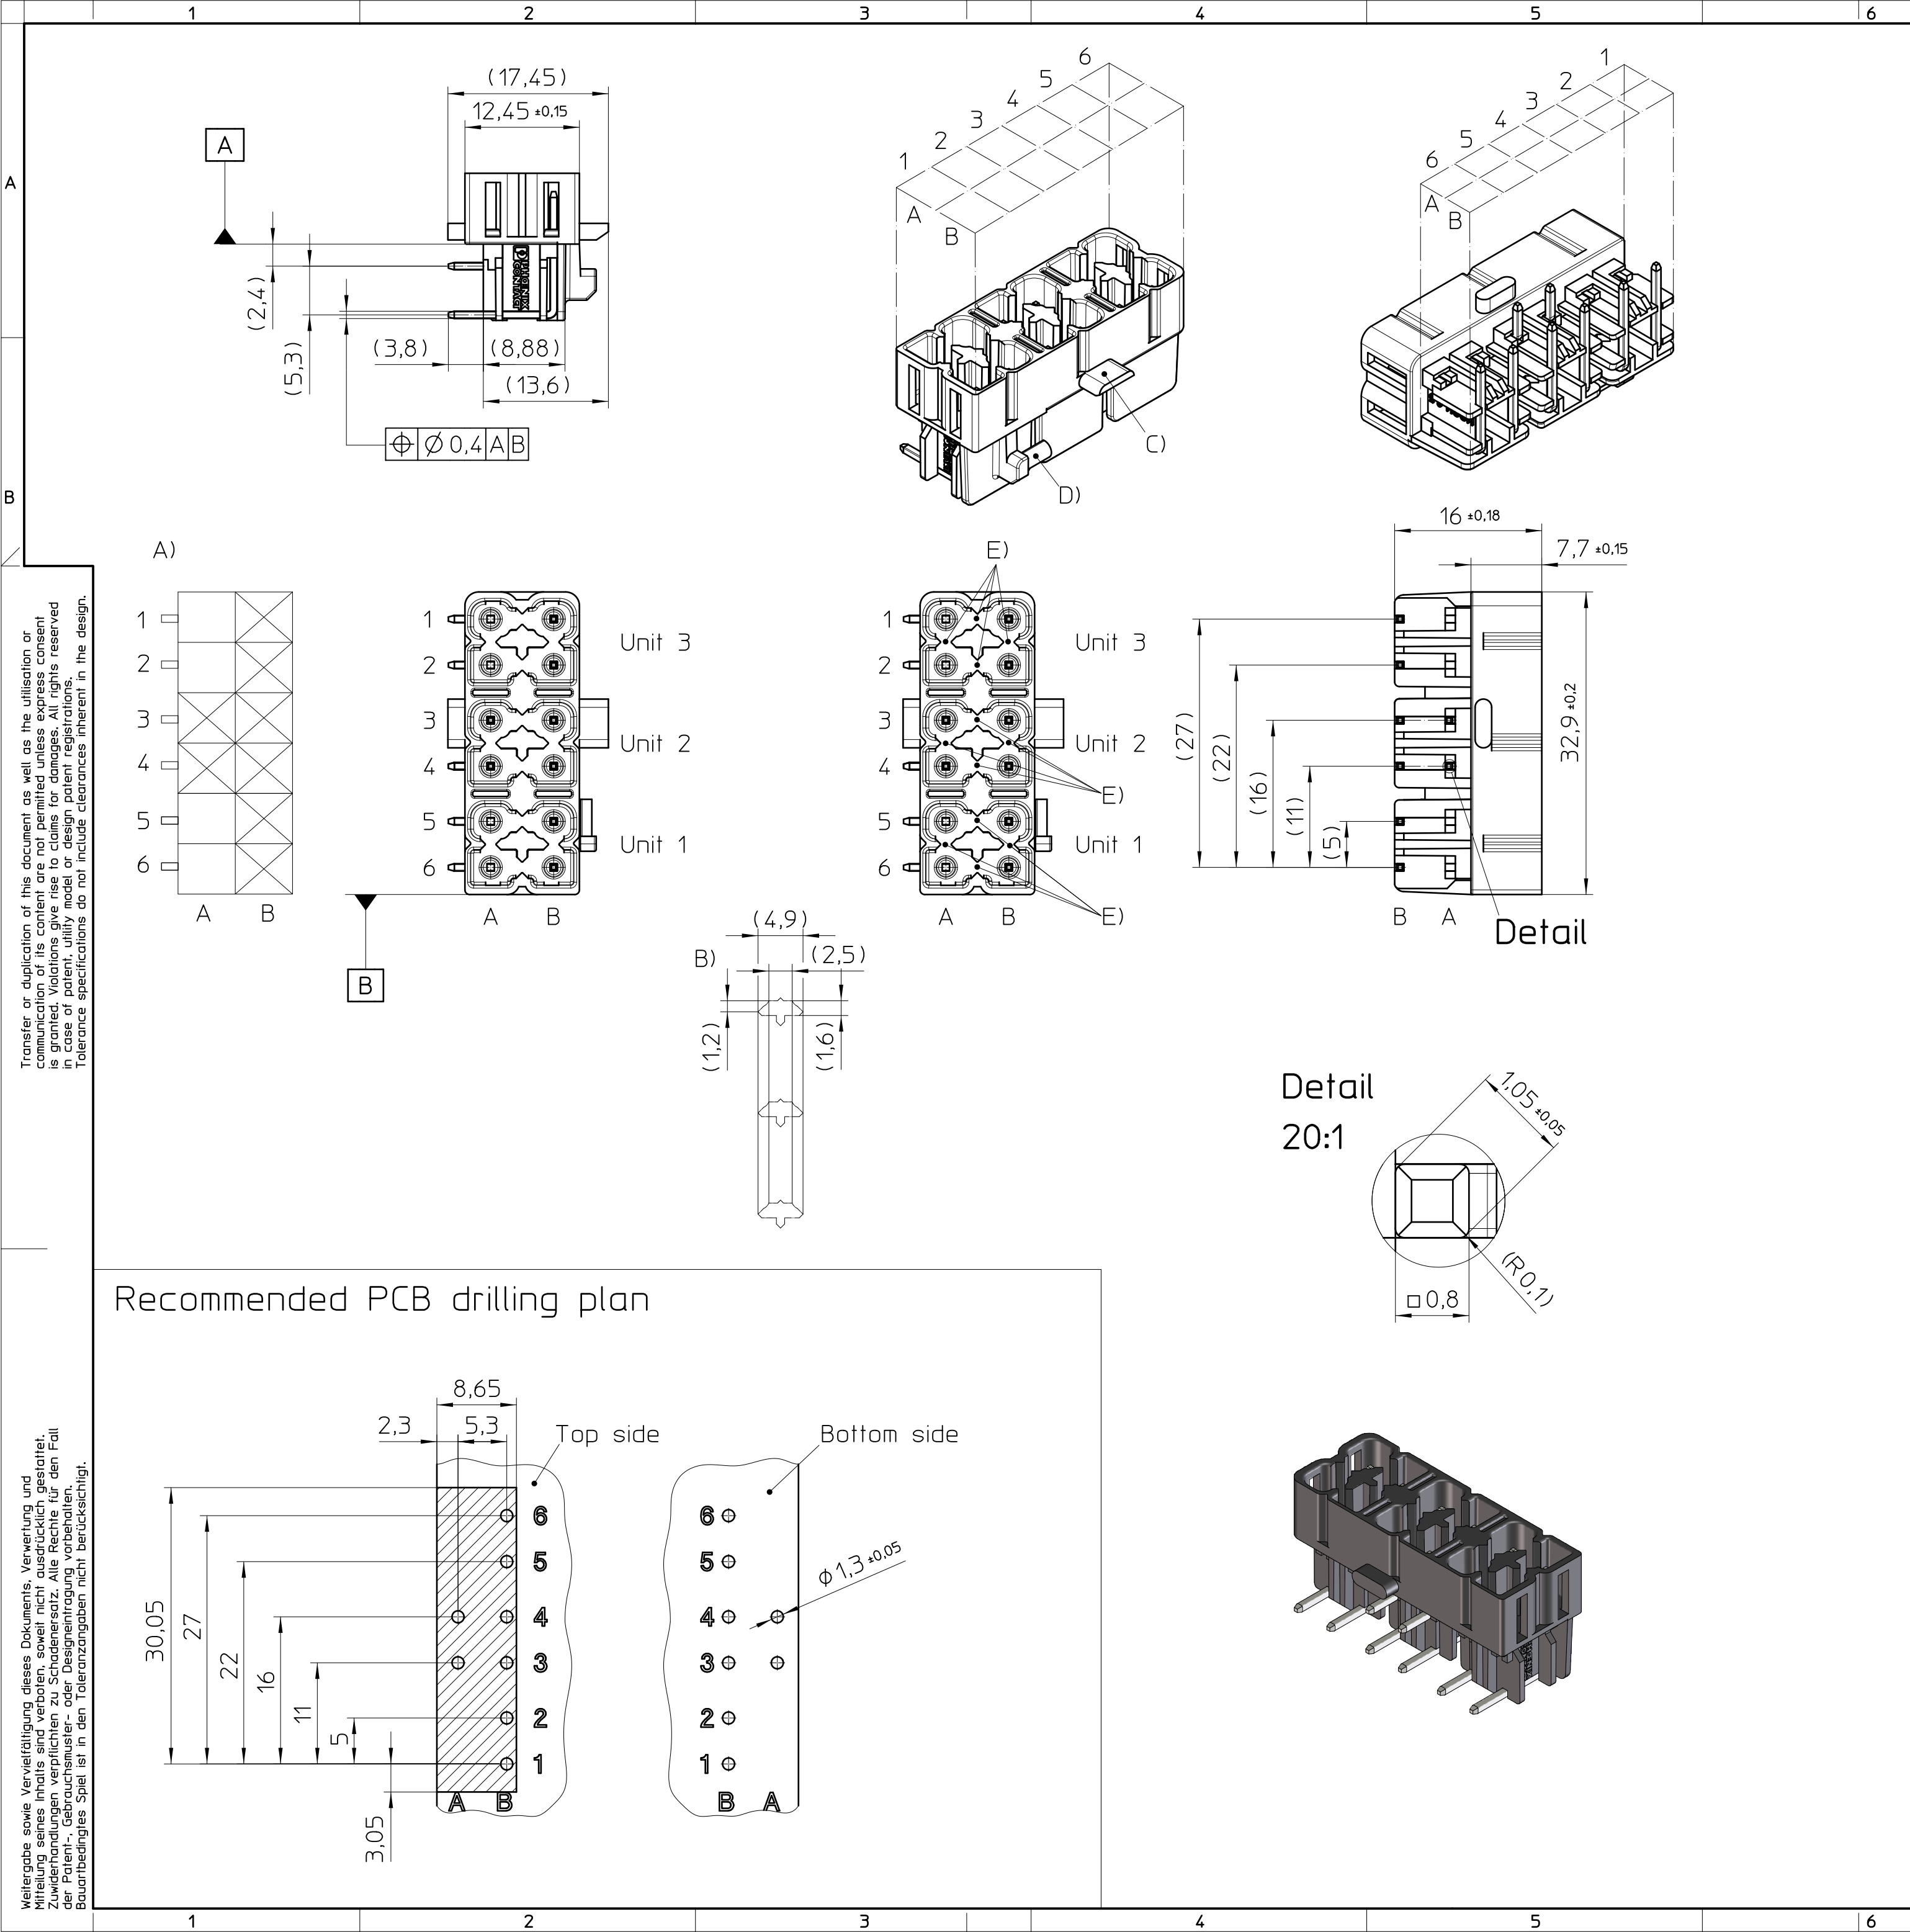


- General Information
- Tolerances apply in a normal climate according to DIN ISO 291-23/50-2
  - Web: [www.phoenixcontact.com](http://www.phoenixcontact.com) webcode: #0308
  - General tolerances for PCB: dimensions:  $\pm 0,1/R \pm 0,2/\pm 1^\circ$  symmetry: 0,2
  - PCB-thickness:  $1,6 \pm 0,2$
  - When using the base strip in housing from Phoenix Contact the PCB outline housing series must be used.
  - Restricted area
  - Corresponding plug for unit 1: HSCP-SP 2,5-1U...
  - Corresponding plug for unit 2: HSCP-SP 2,5-1U...
  - Corresponding plug for unit 3: HSCP-SP 2,5-1U...

Additional information:  
A) Contact type

| Wiring Diagram   |                     |                   |
|------------------|---------------------|-------------------|
| schematic symbol | description         | electrical symbol |
|                  | pin contact         |                   |
|                  | without pin contact |                   |

B) Marking area/layout  
marking example with recommended font height

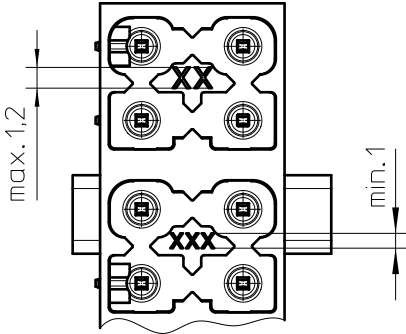

C) Lock and Release area

D) Fixation pin for spring

E) Coding area for CP-DMC 1,5

Mechanical coding not applicate before soldering

Mechanical coding possibilities after soldering

| no coding | coding possibilities |  |  |  |  |  |
|-----------|----------------------|--|--|--|--|--|
|           |                      |  |  |  |  |  |

Coding possibilities for twin contact

|  |  |
|--|--|
|  |  |
|--|--|