

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

A
B

A
B

C

D






E

F

PANEL

Application example

(OCS PANEL 1210 in the OCS HP 121006...)

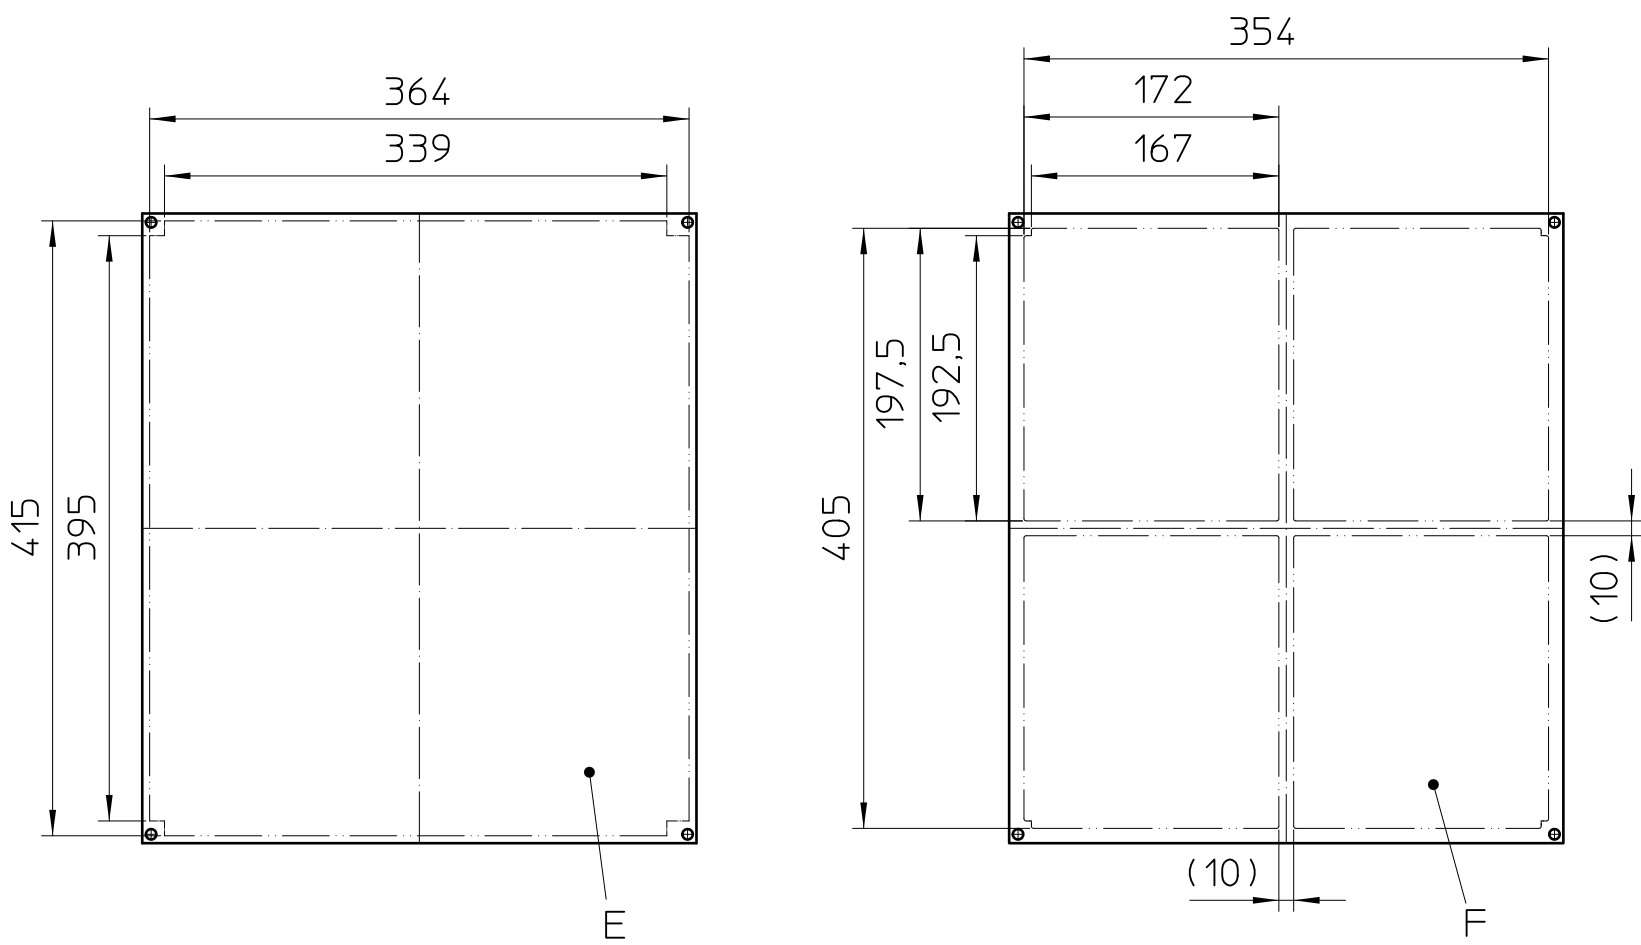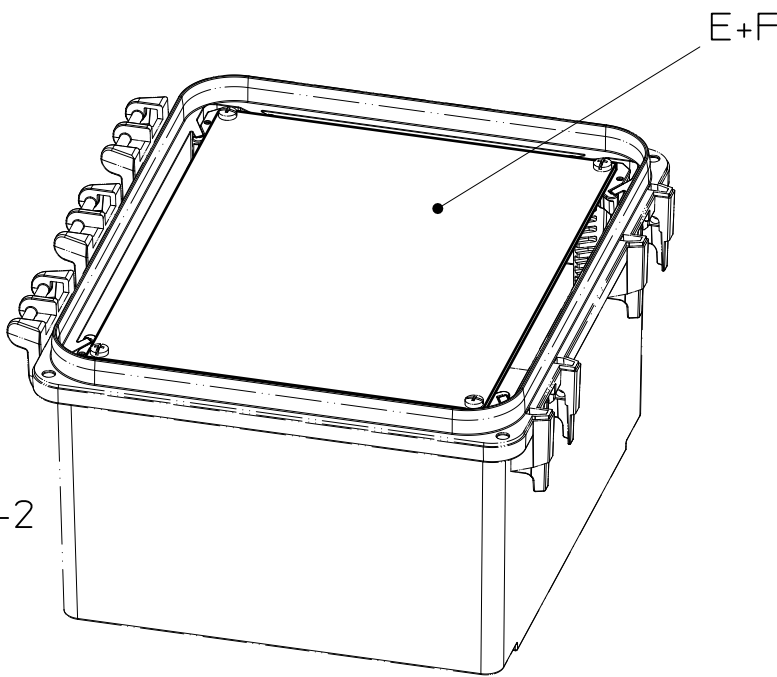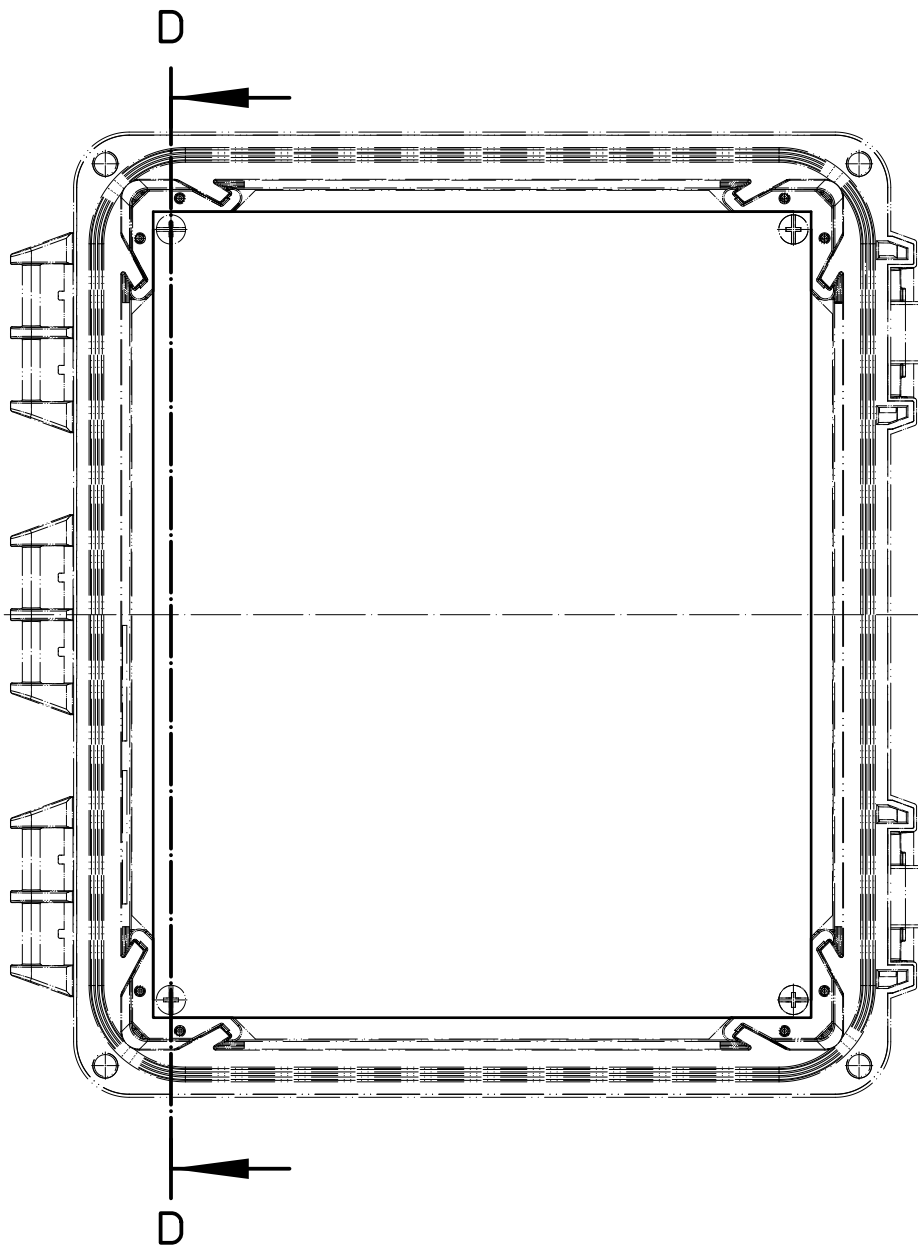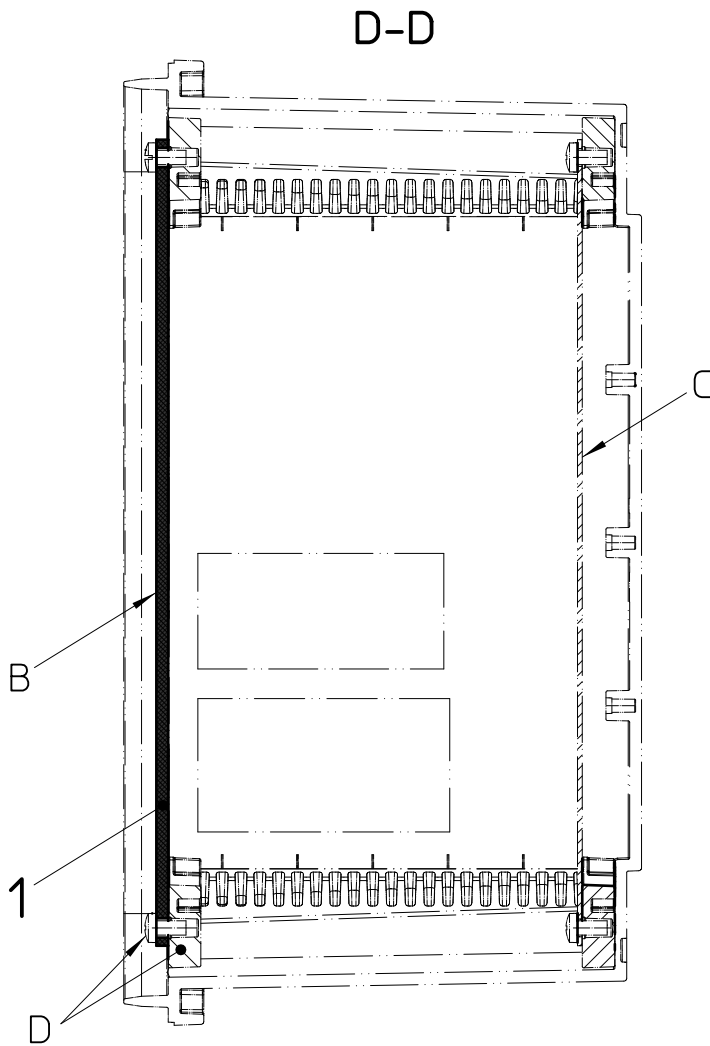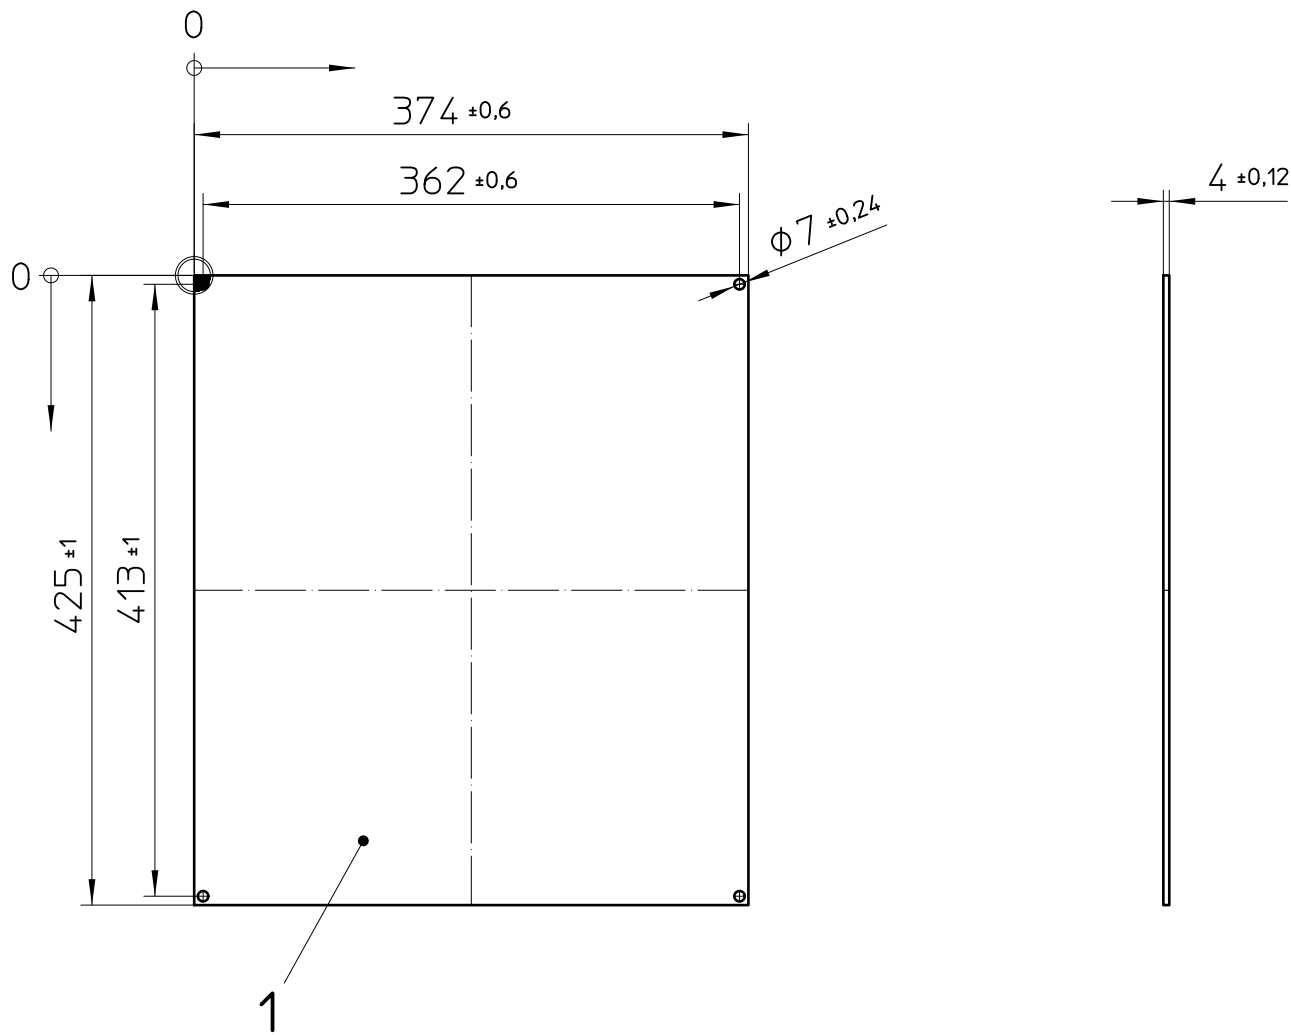

General Information:

- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Workpiece zero point for mechanical processing
- Tolerances for mechanical processing are ISO 2768-mk
- Tolerances for printing DIN ISO 2768-m
- Machining radii min. R1, further on request
- Web: www.phoenixcontact.com

Additional Information:

- A. Accessories for: OCS HP 181610 GY7035 and OCS HP 181610 TRANS
- B. OCS PANEL ... is shown at the first position
- C. The PCB is shown at the last position
- D. Mounting with OCS CORNER SET
- E. Marking area
- F. Machining area:

- max. continuous bar length at width 2mm: 40mm
- max. continuous bar length at width 5mm: 140mm
- max. continuous bar length at width 10mm: 340mm

		Pos.	QTY	Description	Material
		1	1	OCS PANEL	PC

 DIN A2	document-no. / ri	article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]	
	01671461 / 01	1562145	15		
	date	document-type			
	26.09.2024	TECDOC 2D_Productdrawing			
page 1	of 1	description			OCS PANEL 1816 PC