


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauabfertigungsspiel ist in den Toleranzangaben nicht berücksichtigt.

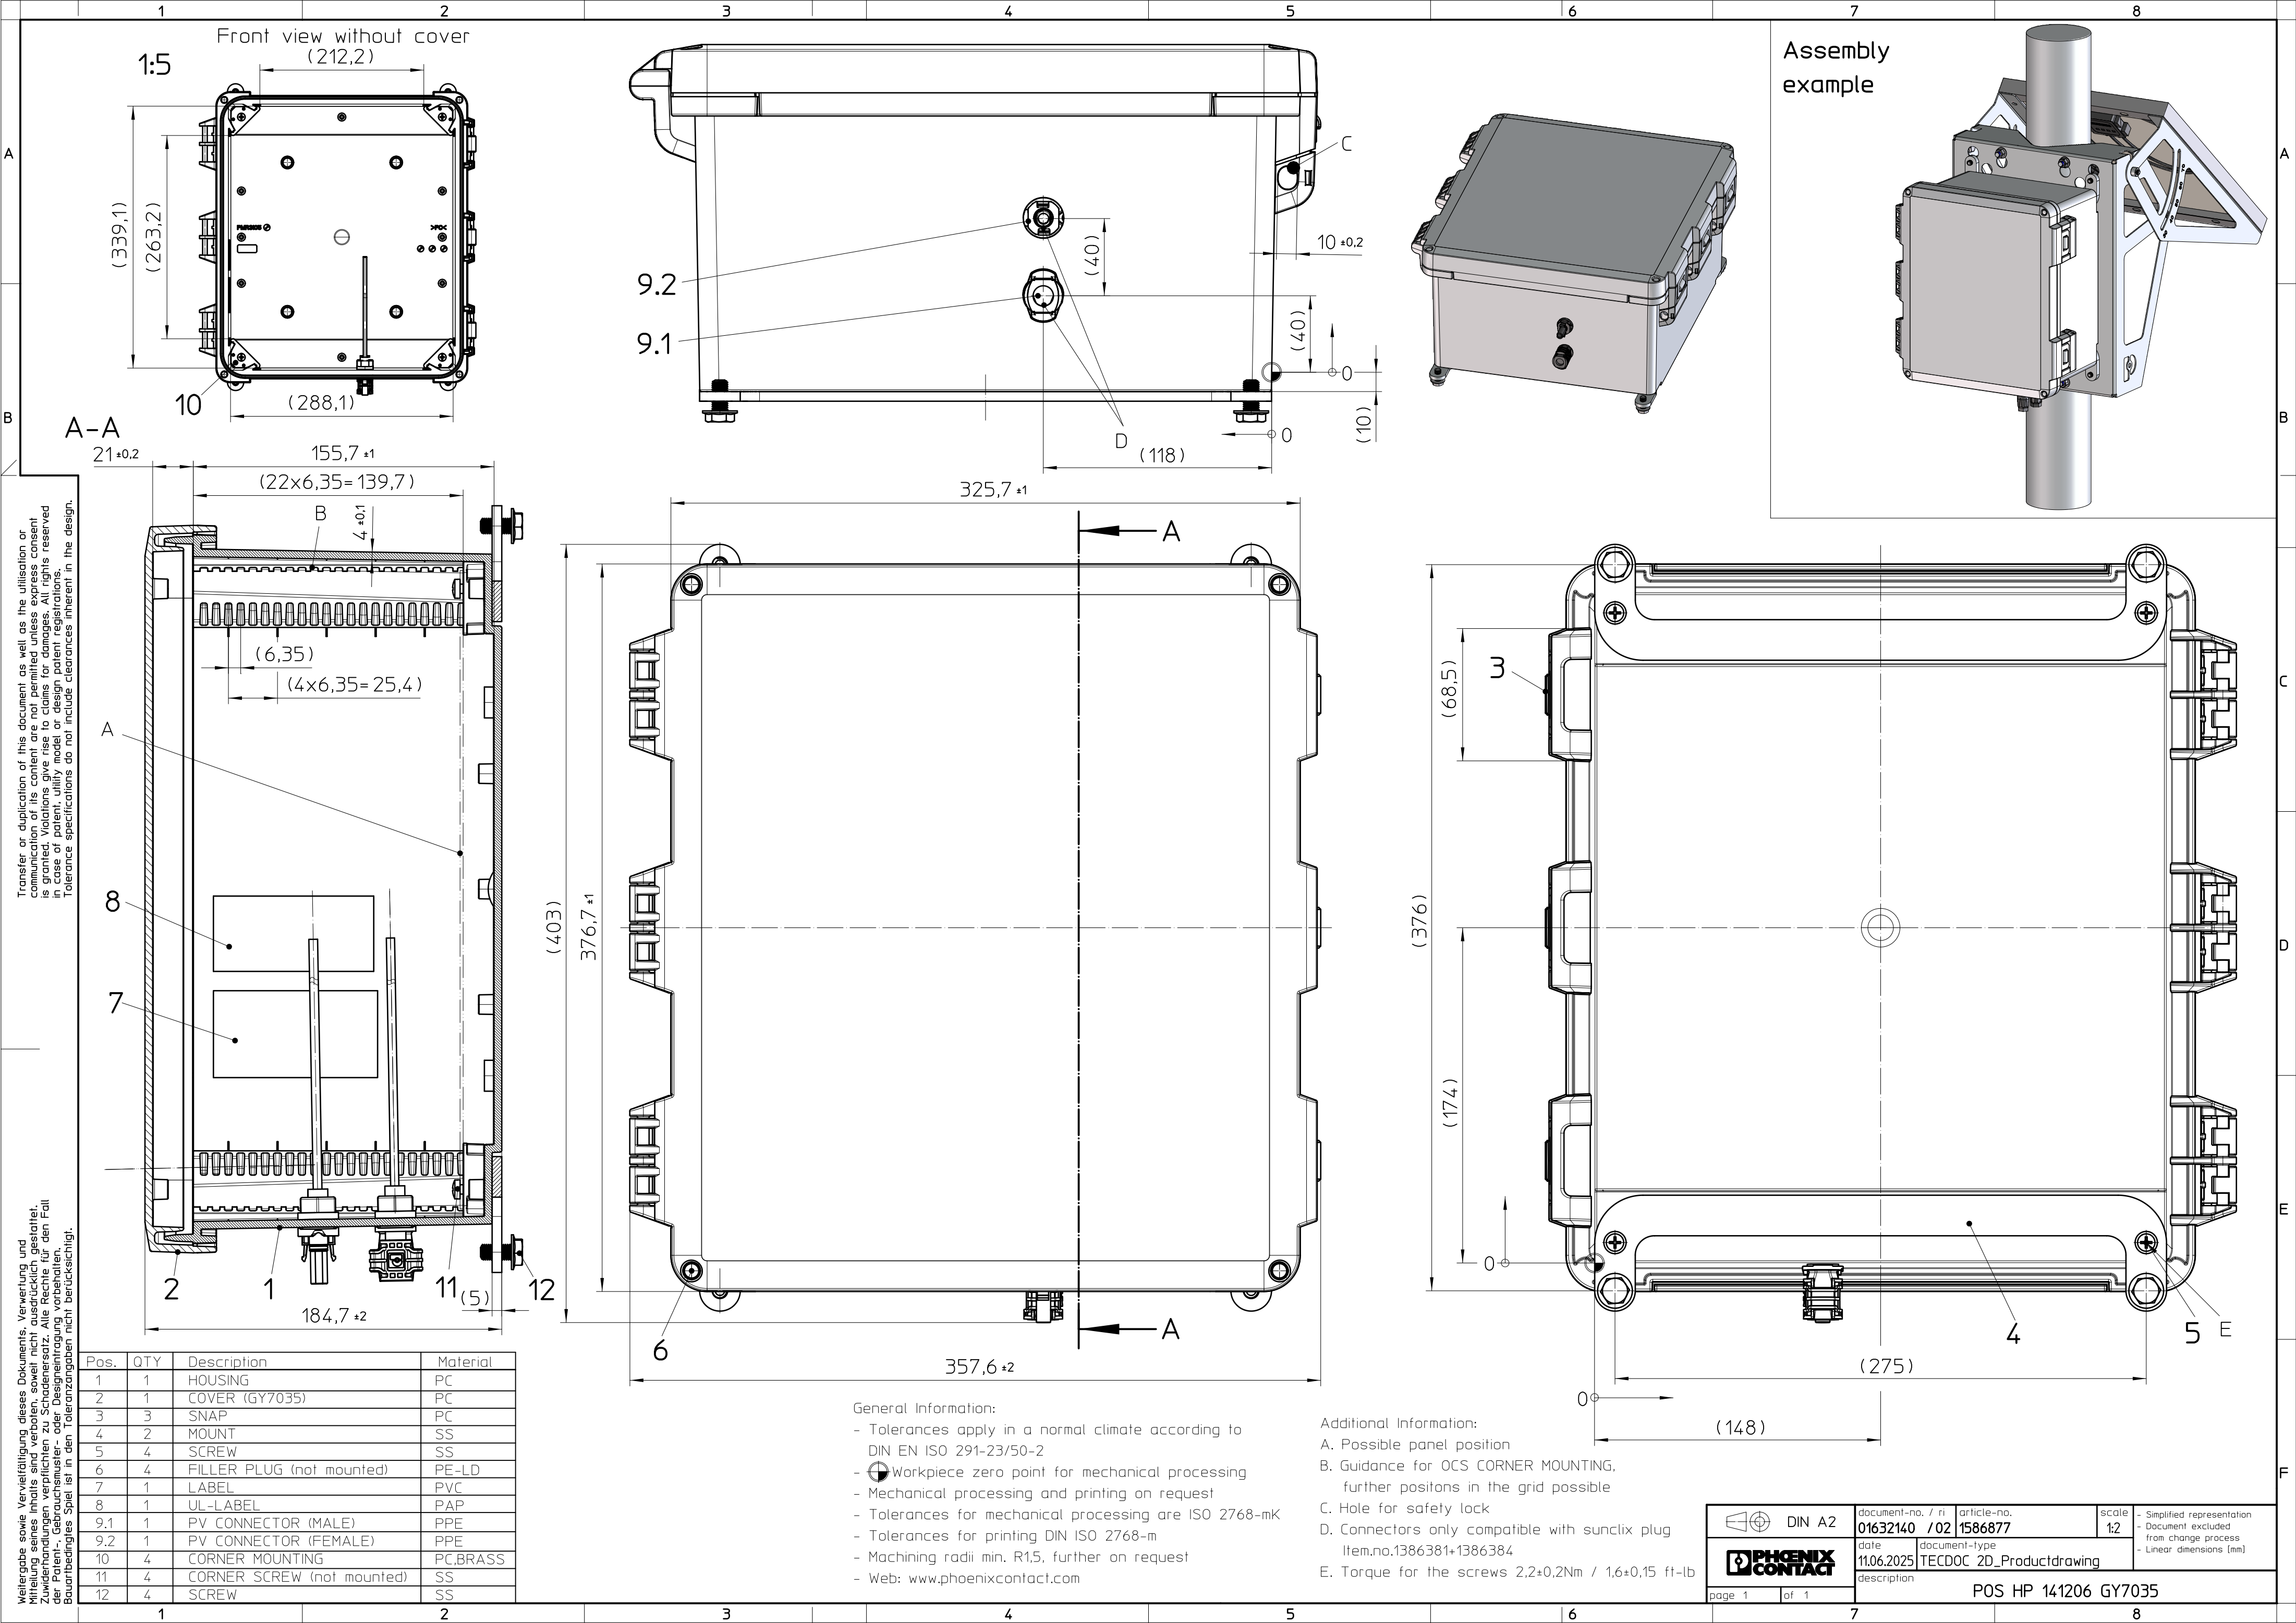

Pos.	QTY	Description	Material
1	1	HOUSING	PC
2	1	COVER (GY7035)	PC
3	3	SNAP	PC
4	2	MOUNT	SS
5	4	SCREW	SS
6	4	FILLER PLUG (not mounted)	PE-LD
7	1	LABEL	PVC
8	1	UL-LABEL	PAP
9.1	1	PV CONNECTOR (MALE)	PPE
9.2	1	PV CONNECTOR (FEMALE)	PPE
10	4	CORNER MOUNTING	PC,BRASS
11	4	CORNER SCREW (not mounted)	SS
12	4	SCREW	SS

General Information:

- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Workpiece zero point for mechanical processing
- Mechanical processing and printing on request
- Tolerances for mechanical processing are ISO 2768-mK
- Tolerances for printing DIN ISO 2768-m
- Machining radii min. R1.5, further on request
- Web: www.phoenixcontact.com

Additional Information:

- A. Possible panel position
- B. Guidance for OCS CORNER MOUNTING, further positions in the grid possible
- C. Hole for safety lock
- D. Connectors only compatible with sunclix plug Item.no.1386381+1386384
- E. Torque for the screws 2,2±0,2Nm / 1,6±0,15 ft-lb

 DIN A2		document-no. / ri article-no.		scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		01632140 / 02 1586877		1:2	
		date	document-type		
		11.06.2025	TECDOC 2D_Productdrawing		
		description			
page 1		of 1			
		POS HP 141206 GY7035			