

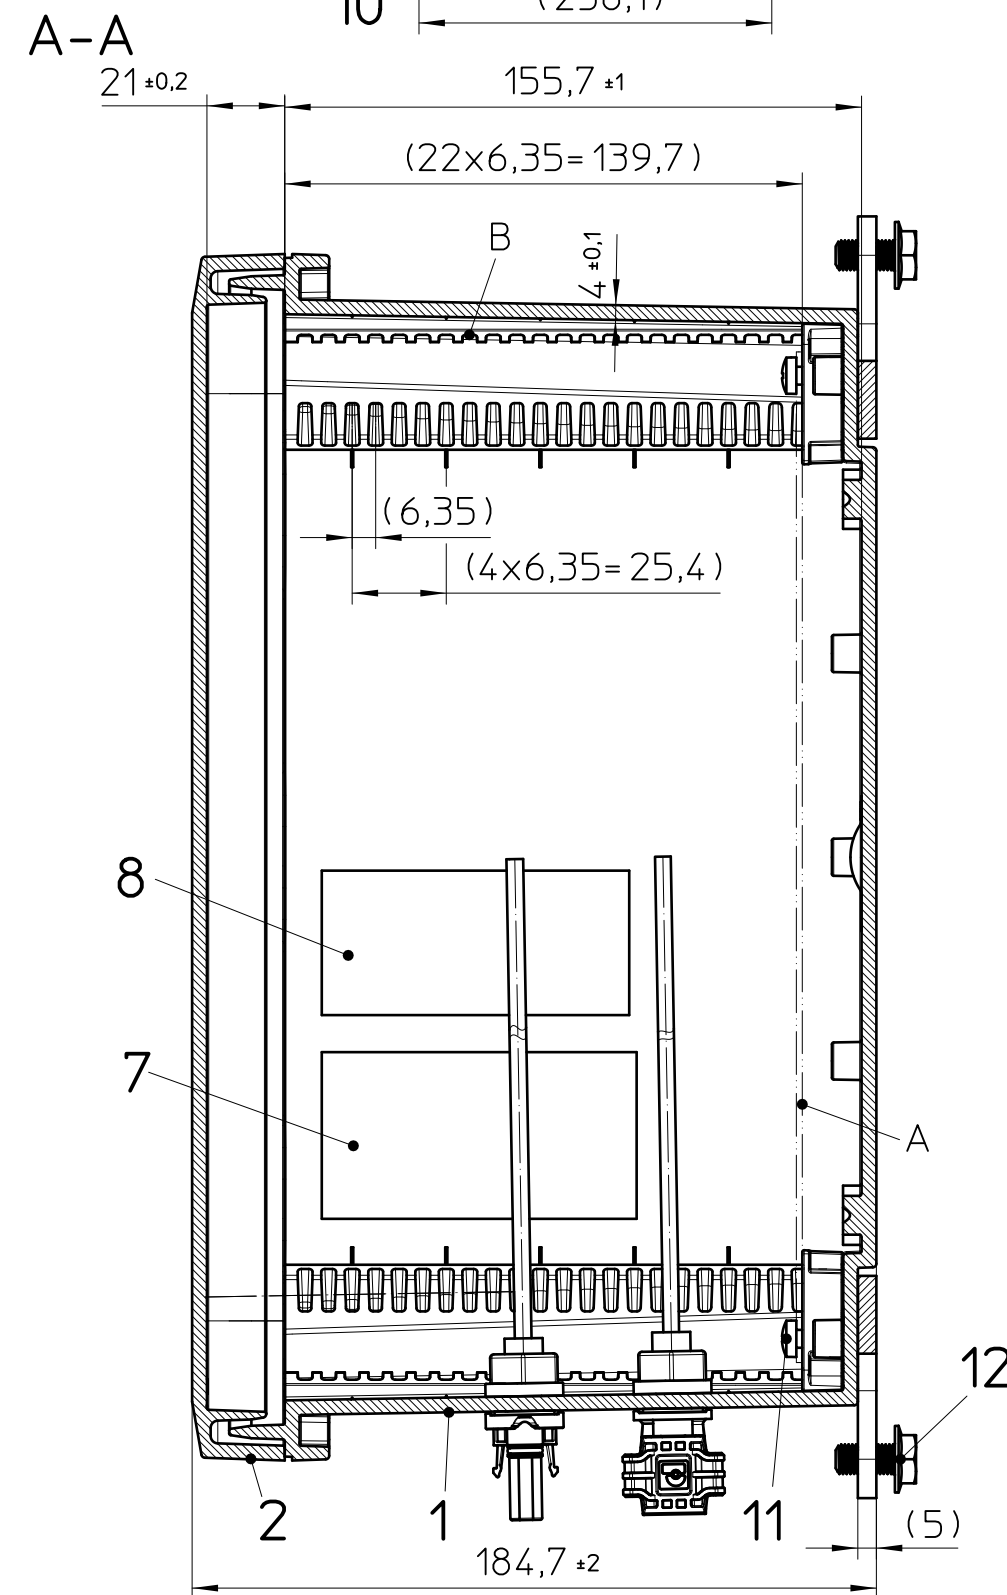





Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

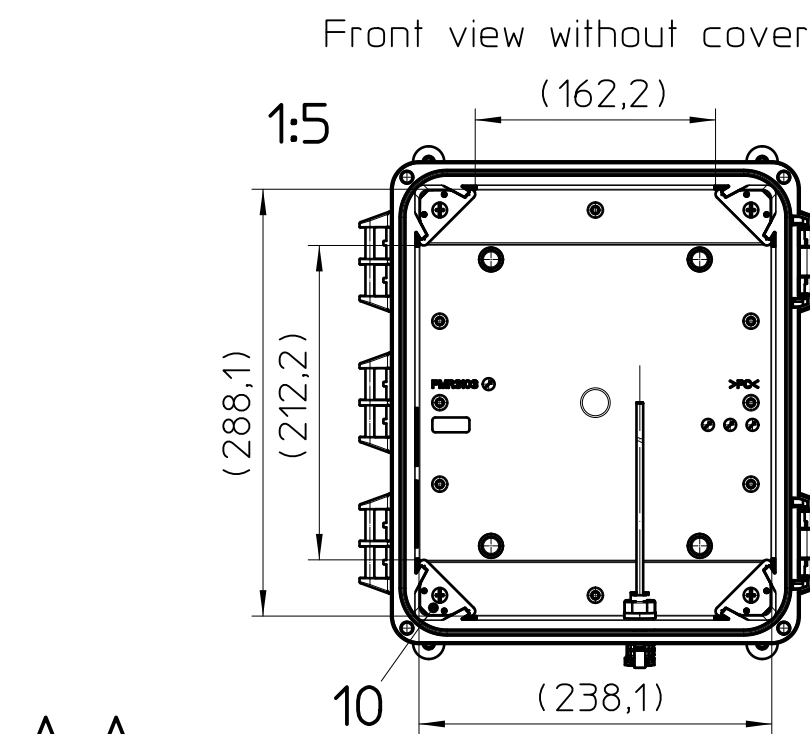

Pos.	QTY	Description	Material
1	1	HOUSING	PC
2	1	COVER (TRANS)	PC
3	3	SNAP	PC
4	2	MOUNT	SS
5	4	SCREW	SS
6	4	FILLER PLUG (not mounted)	PE-LD
7	1	LABEL	PVC
8	1	UL-LABEL	PAP
9.1	1	PV CONNECTOR (MALE)	PPE
9.2	1	PV CONNECTOR (FEMALE)	PPE
10	4	CORNER MOUNTING	PC,BRASS
11	4	CORNER SCREW (not mounted)	SS
12	4	SCREW	SS

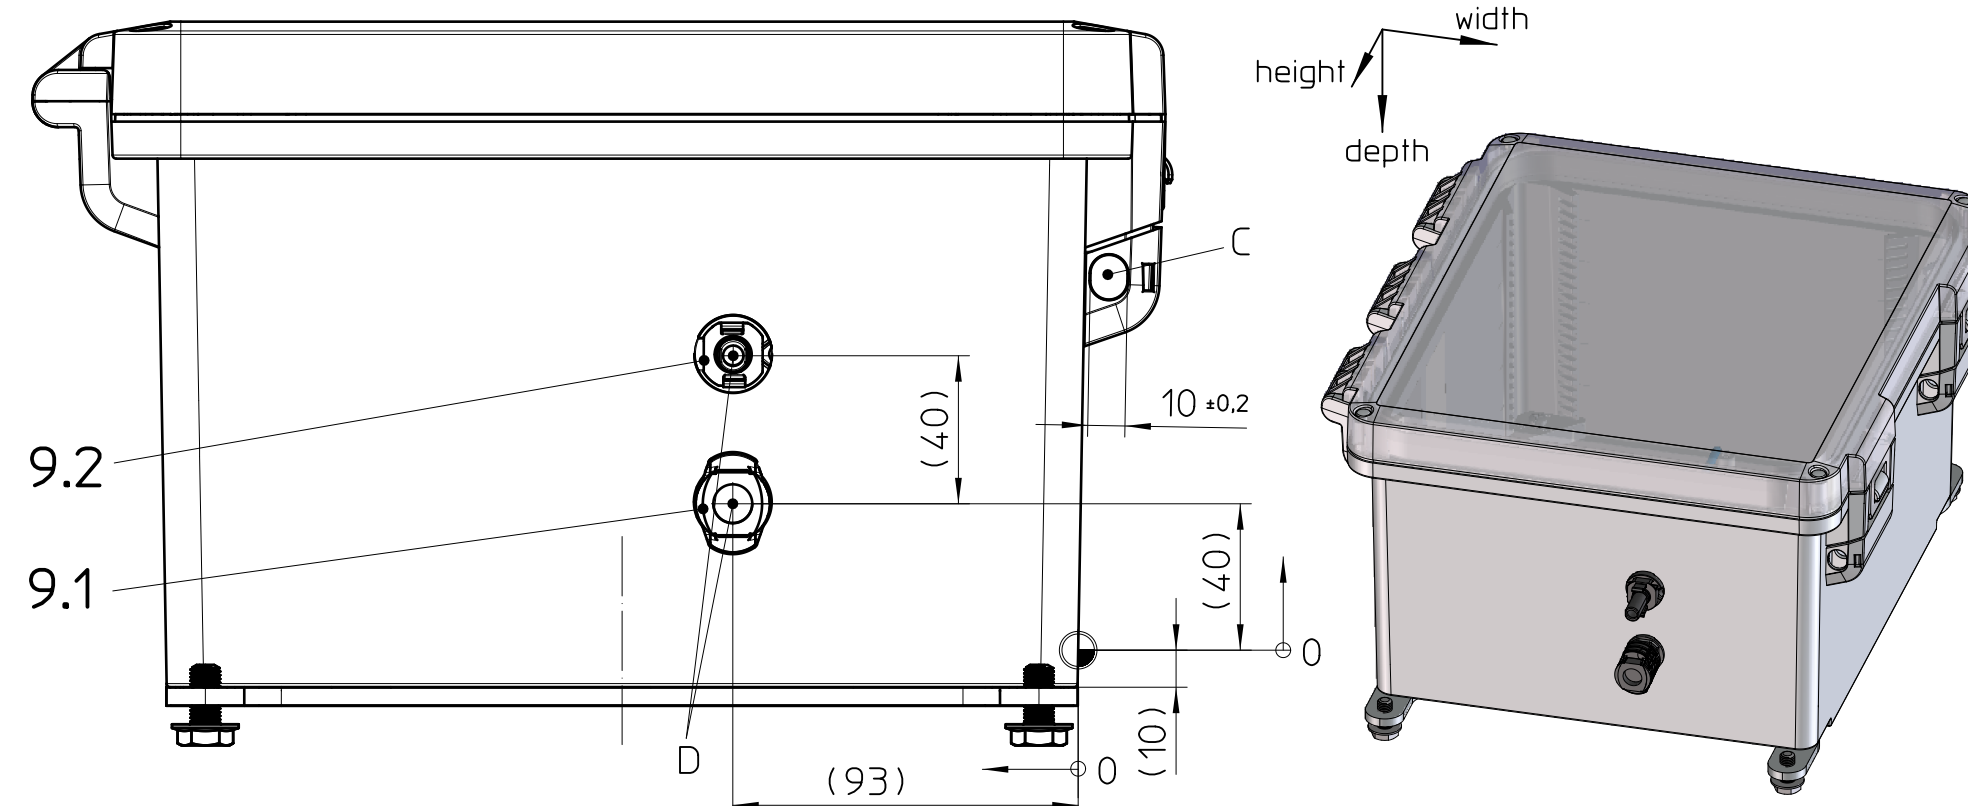

Assembly example

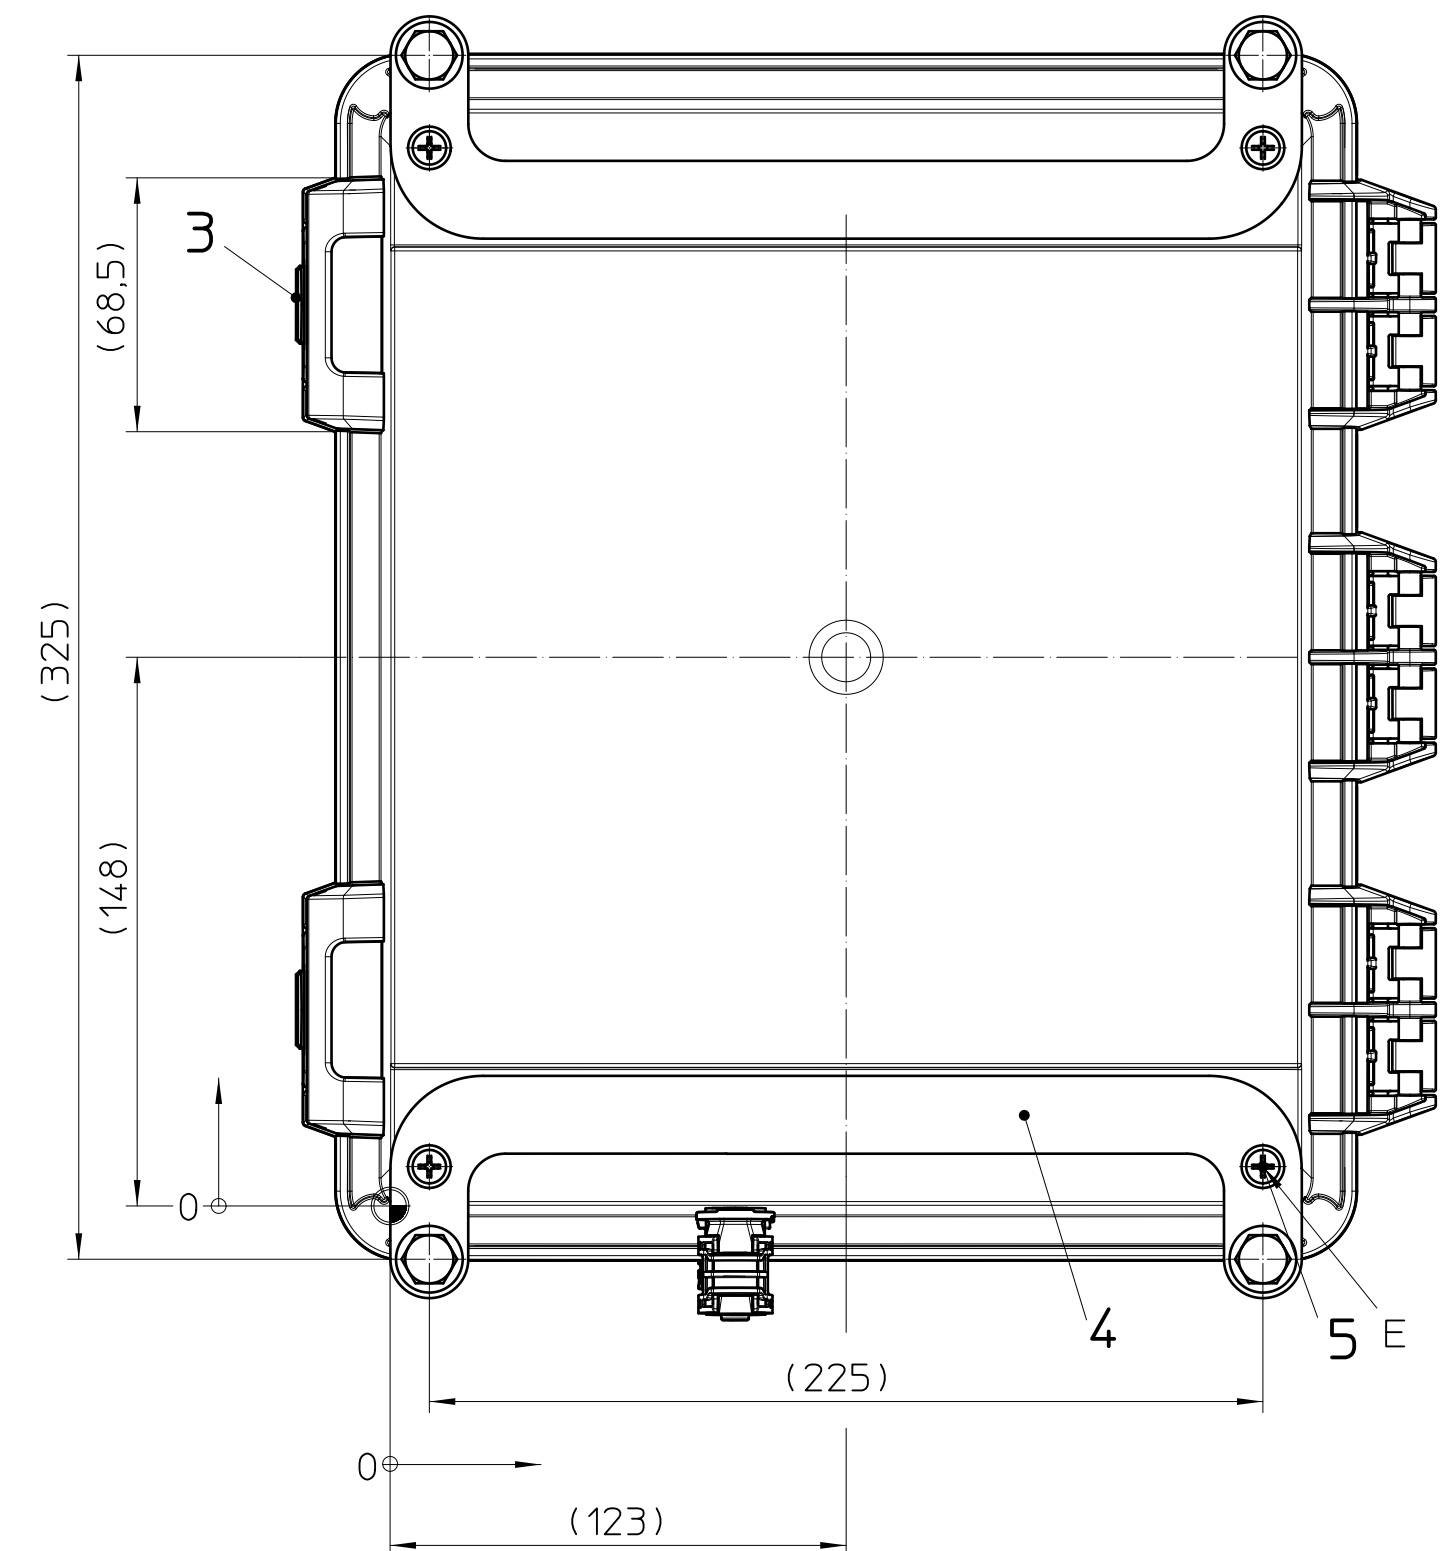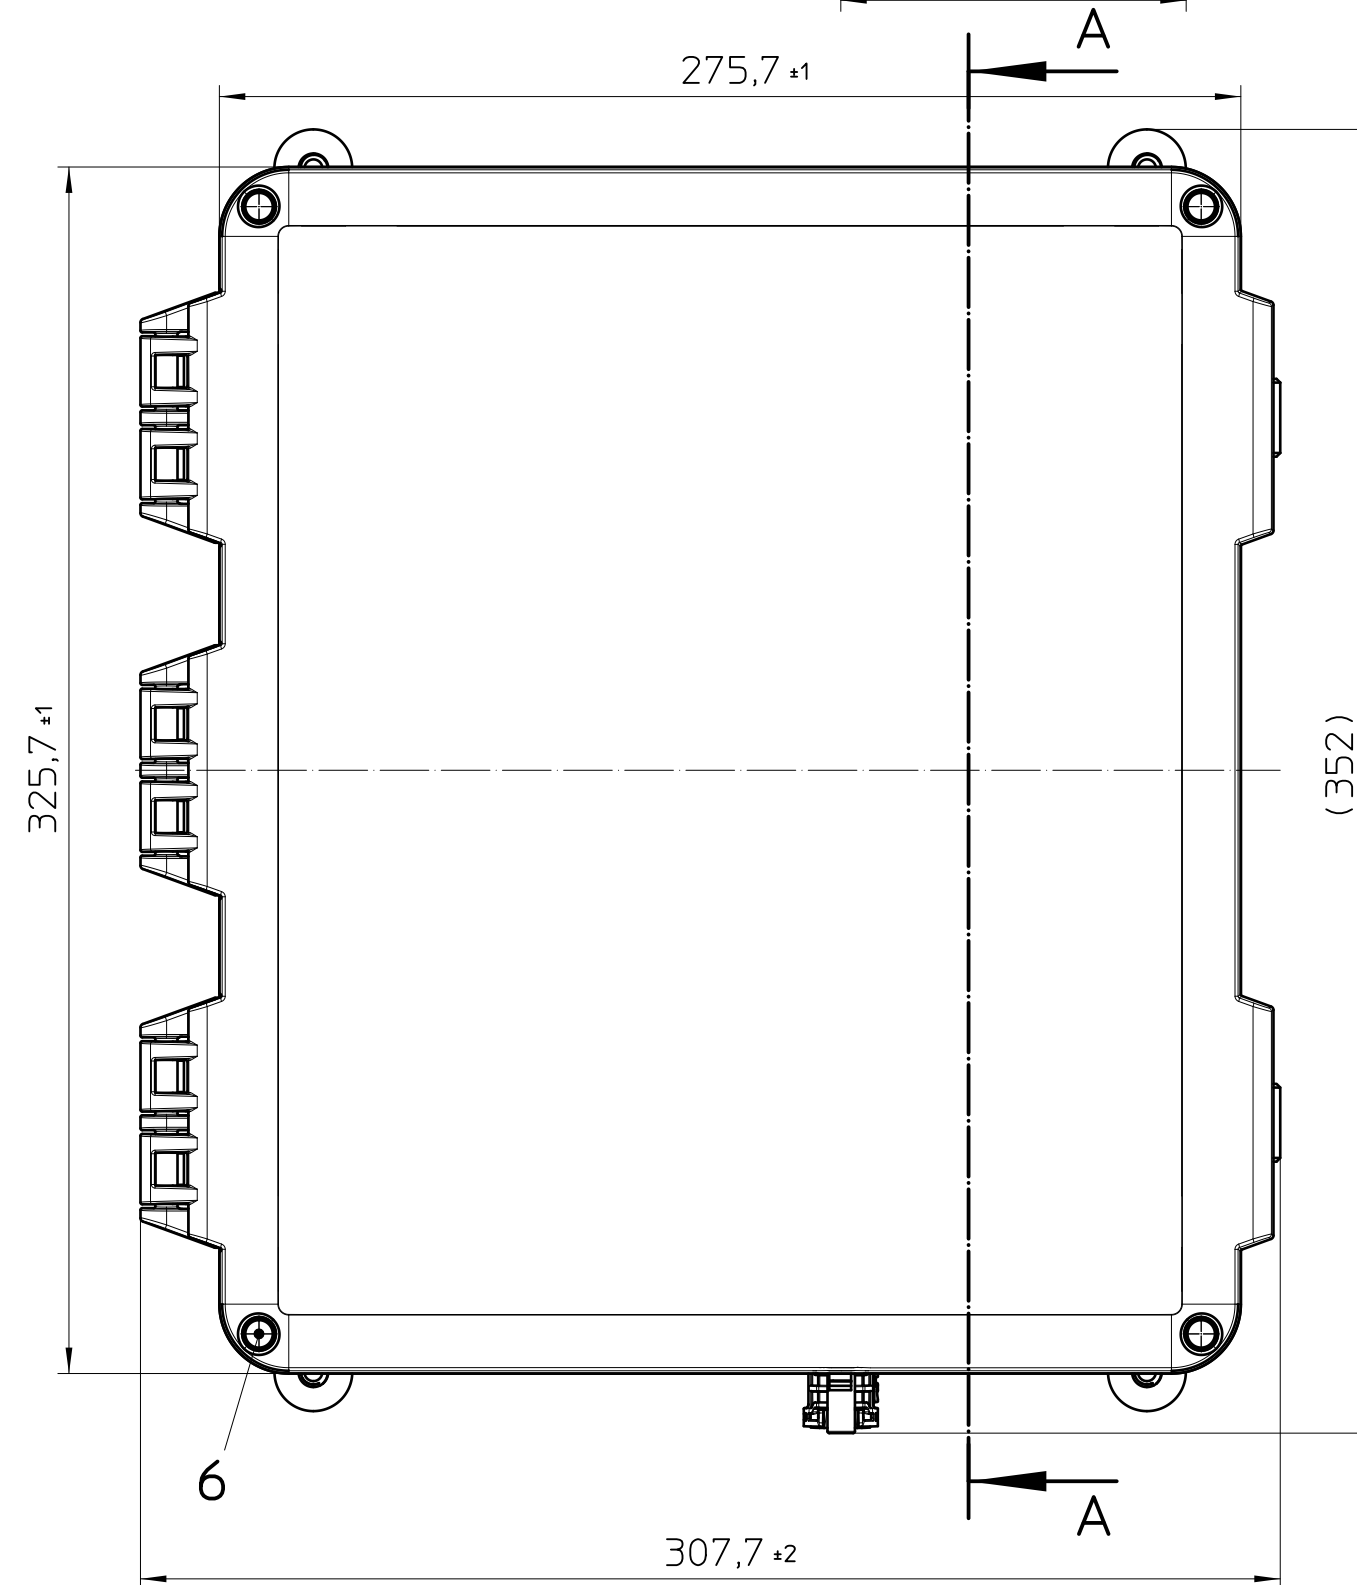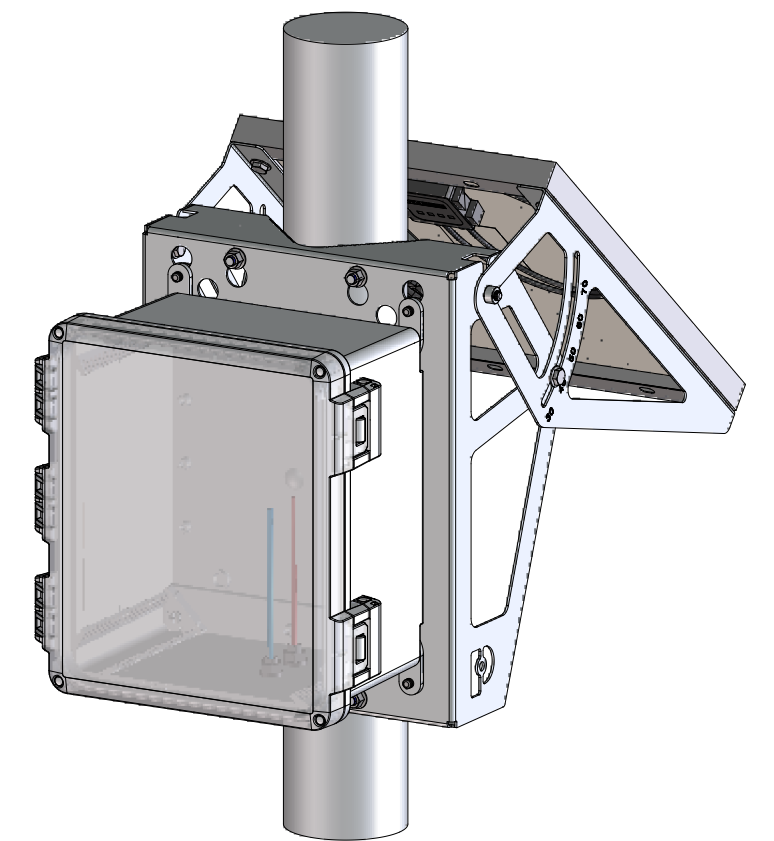

General Information:

- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
-  Workpiece zero point for mechanical processing
- Mechanical processing and printing on request
- Tolerances for mechanical processing are ISO 2768-mK
- Tolerances for printing DIN ISO 2768-m
- Machining radii min. R1,5, further on request
- Web: www.phoenixcontact.com

Additional Information:

- A. Possible panel position
- B. Guidance for OCS CORNER MOUNTING,
further positions in the grid possible
- C. Hole for safety lock
- D. Connectors only compatible with sunclix plug
Item.no.1386381+1386384
- E. Torque for the screws 2,2±0,2Nm / 1,6±0,15 ft-lb

 DIN A2		document-no. / r i	article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		01631971 / 02	1588626	1:2	
		date	document-type		
		11.06.2025	TECDOC_2D_Productdrawing		
		description			
		POS_HP_121006_TRANS			
page 1	of 1				