

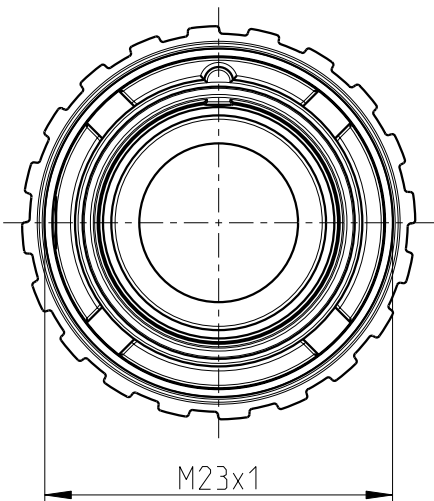


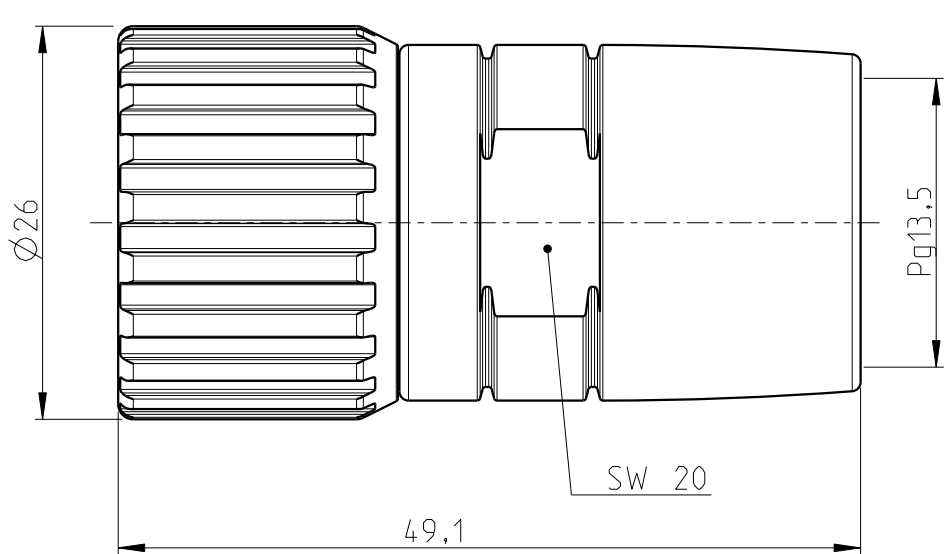

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaa voraus, das lediglich für Prüf- und Wartungszwecke getrennt wird. Ist der Steckverbinder unverriegelt den Umgebungsbedingungen ausgesetzt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

		Elektrische Daten																
		Bemessungsstrom bei max. Anschlußquerschnitt								Überspannungs-kategorie								
										Aufstellhöhe								
Mechanische Daten		Bemessungsspannung								Durchgangswiderstand								
Polzahl		Bemessungsstoßspannung								Verschmutzungsgrad								
Kontaktanschlussart										Technische Änderung vorbehalten			Maßstab:					
Kontakt-Ø													2:1					
Temperaturbereich		-40 °C / +125 °C								Datum		Name		Benennung:				
Schutzart		IP 67, verriegelt						Bearb.		10.02.04		Beger		Serie RC				
Steckzyklen								Gepr.						Kabelsteckverbinder Bauform 13				
Bedruckung		PHOENIX CONTACT																
Material				2		27/04/10-1 elektr. Daten und Temp. geändert		2010-05-18		Scheerer		CONINVERS Ein Unternehmen der Phoenix Contact Gruppe			Zeichnungsnummer:		Blatt: 1 von: 2	
Gehäuse		GD-Zn / CuZn Ni		1		Zeichnung überarbeitet		26.09.08		Scherem.					RC -00000001300			
Kontaktträger/ISO														Ersatz für:				
Kontakte				Aus-gabe		Änderung		Datum		Name								
Dichtungen		FPM																

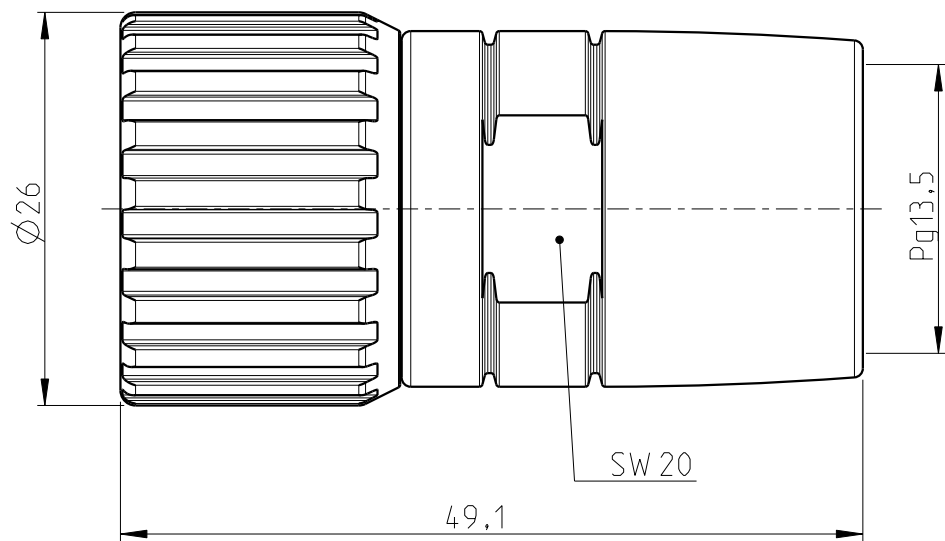

The specified electrical and mechanical data assume that the connector pair is correctly locked and is only disconnected for testing and maintenance purposes. If the connector is unlocked and exposed to ambient conditions and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

		Electrical Data									
		rated current at max. cross section						Overvoltage category			
								Altitude above sea level			
Mechanical Data		rated voltage						Contact resistance			
No. of poles		rated impulse voltage						degree of pollution			
Contact termination									technical changes reserved		scale: 2:1
Contact-Ø											
Temperature range	-40 °C / +125 °C						date	name	description: Series RC Cable connector Style 13		
Protection class	IP 67, mated					design	10.02.04	Beger			
Mating cycles						chk.					
Labeling	PHOENIX CONTACT										
Material						CONINVERS A Company of Phoenix Contact Group			drawing no.:		page: 2 of: 2
Housing	GD-Zn / CuZn Ni								RC-00000001300		
Insert			see page 1								
Contacts		edi tion	changes	date	name						
Seal	FPM										