

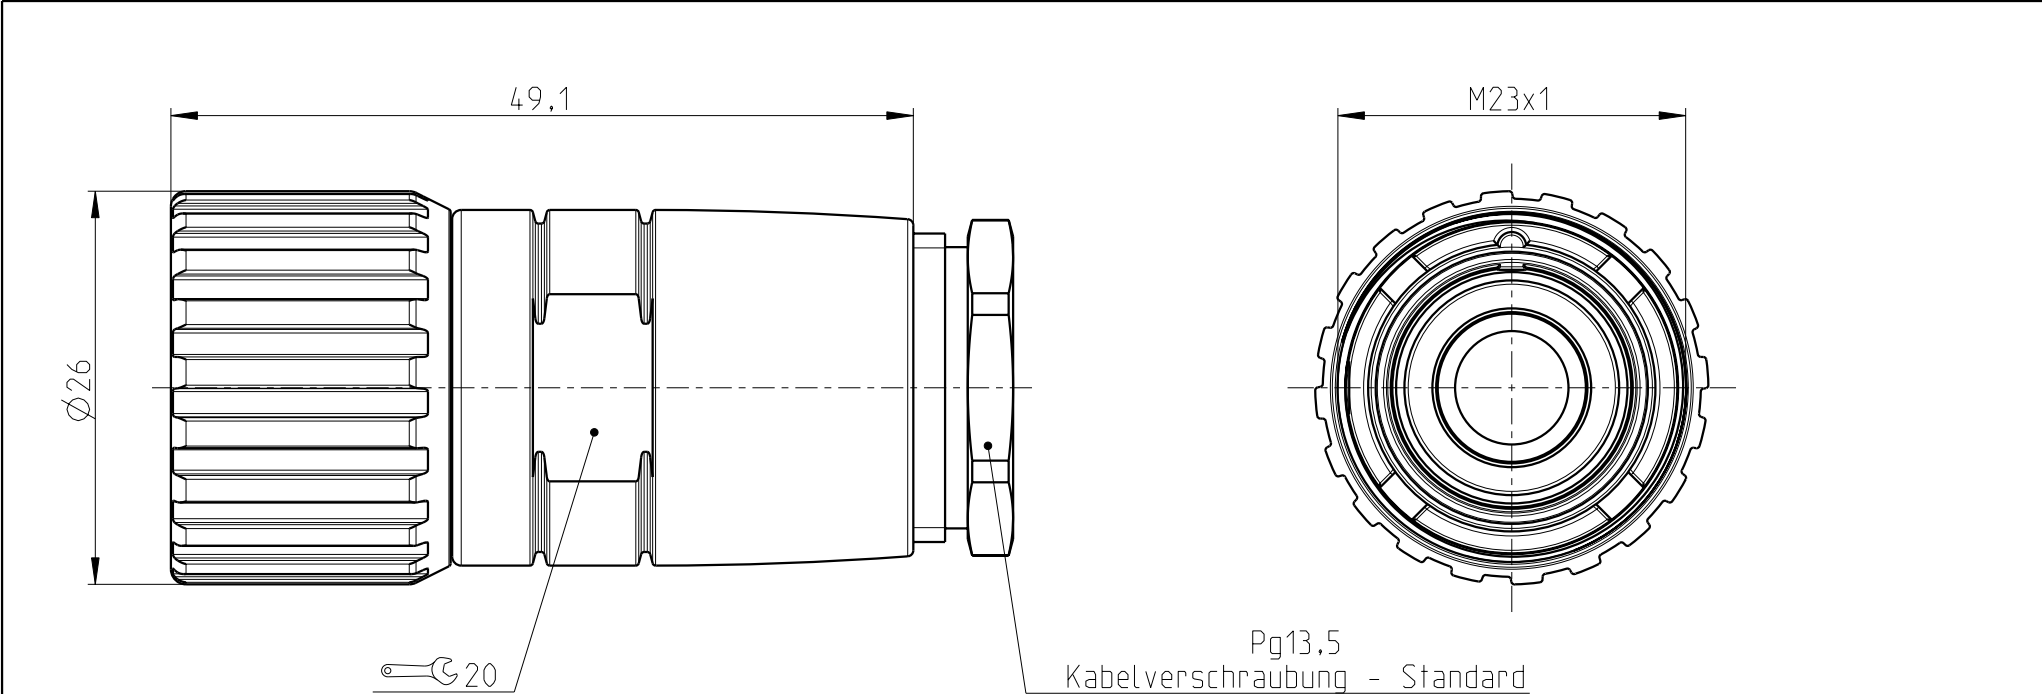


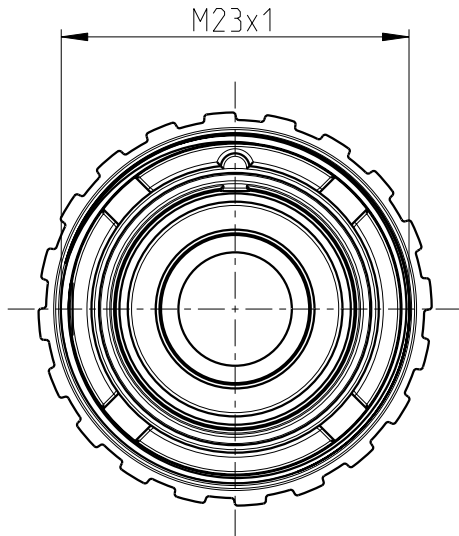

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungskategorie			
						Aufstellhöhe			
Mechanische Daten		Bemessungsspannung				Durchgangswiderstand			
Polzahl / Kontaktart		Bemessungsstoßspannung				Verschmutzungsgrad			
Kontaktanschlussart						Technische Änderung vorbehalten		Maßstab: 2:1	
Kontakt-Ø									
Temperaturbereich	-40 °C / +70 °C					Benennung: Serie RC Kabelsteckverbinder Bauform 17 gerade Ausführung		Blatt: 1 von: 2	
Schutzart	IP 65, verriegelt								
Steckzyklen									
Material						Zeichnungsnummer: RC -00000001700			
Gehäuse	GD-Zn / CuZn Ni								
Kontaktträger/ISO						Artikel-Nr.: 1592558			
Kontakte		Ausgabe	Änderung	Datum	Name				
Dichtungen	FKM / NBR								

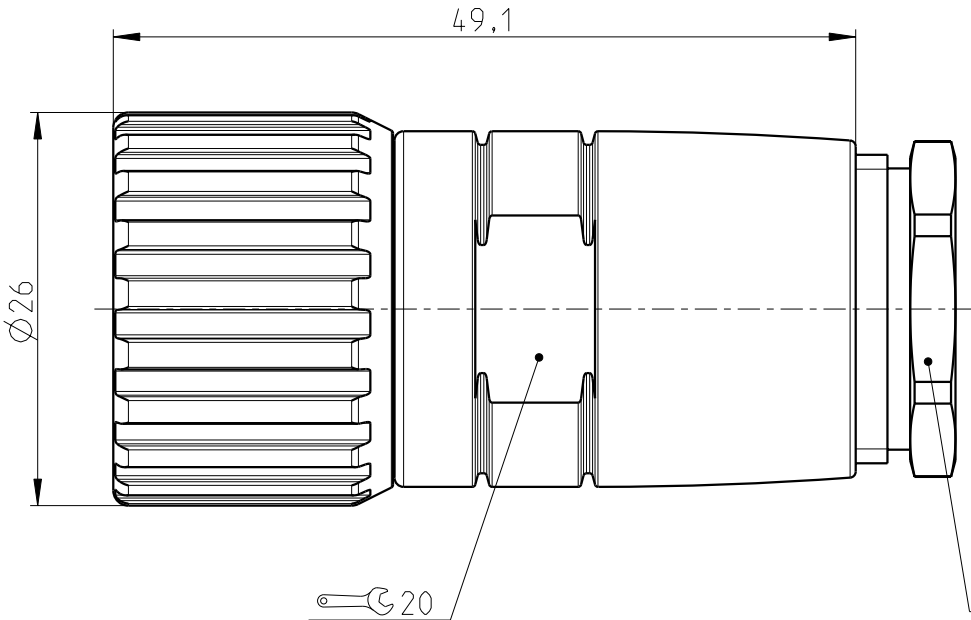

Pg13,5
cable gland - threading Standard

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Electrical Data									
Rated current at max. cross section				Surge voltage category					
				Installation height					
Rated voltage				Contact resistance					
Rated surge voltage				Degree of pollution					
Contact-Ø						technical changes reserved			scale: 2:1
Temperature range	-40 °C / +70 °C								
Degree of protection	IP 65, when locked					description: Series RC Cable connector style 17 straight version			
Mechanical insertion/withdrawal cycles									
Material						drawing no.: RC -00000001700			page: 2 of: 2
Housing	GD-Zn / CuZn Ni								
Insulating body			see page 1			order-no.: 1592558			
Contacts		edition	changes	date	name				
Seal	FKM / NBR								

Mechanical Data

Number of pos./ Contact style

Contact termination

Contact-Ø

Temperature range

Degree of protection

Mechanical

insertion/withdrawal cycles

Material

Housing

Insulating body

Contacts

Seal

GD-Zn / CuZn Ni

FKM / NBR

edition

changes

date

name

design
chk.

date
2016-09-28

name
Kraut

description:

Series RC
Cable connector style 17
straight version

drawing no.:

RC -00000001700

order-no.:

1592558

