

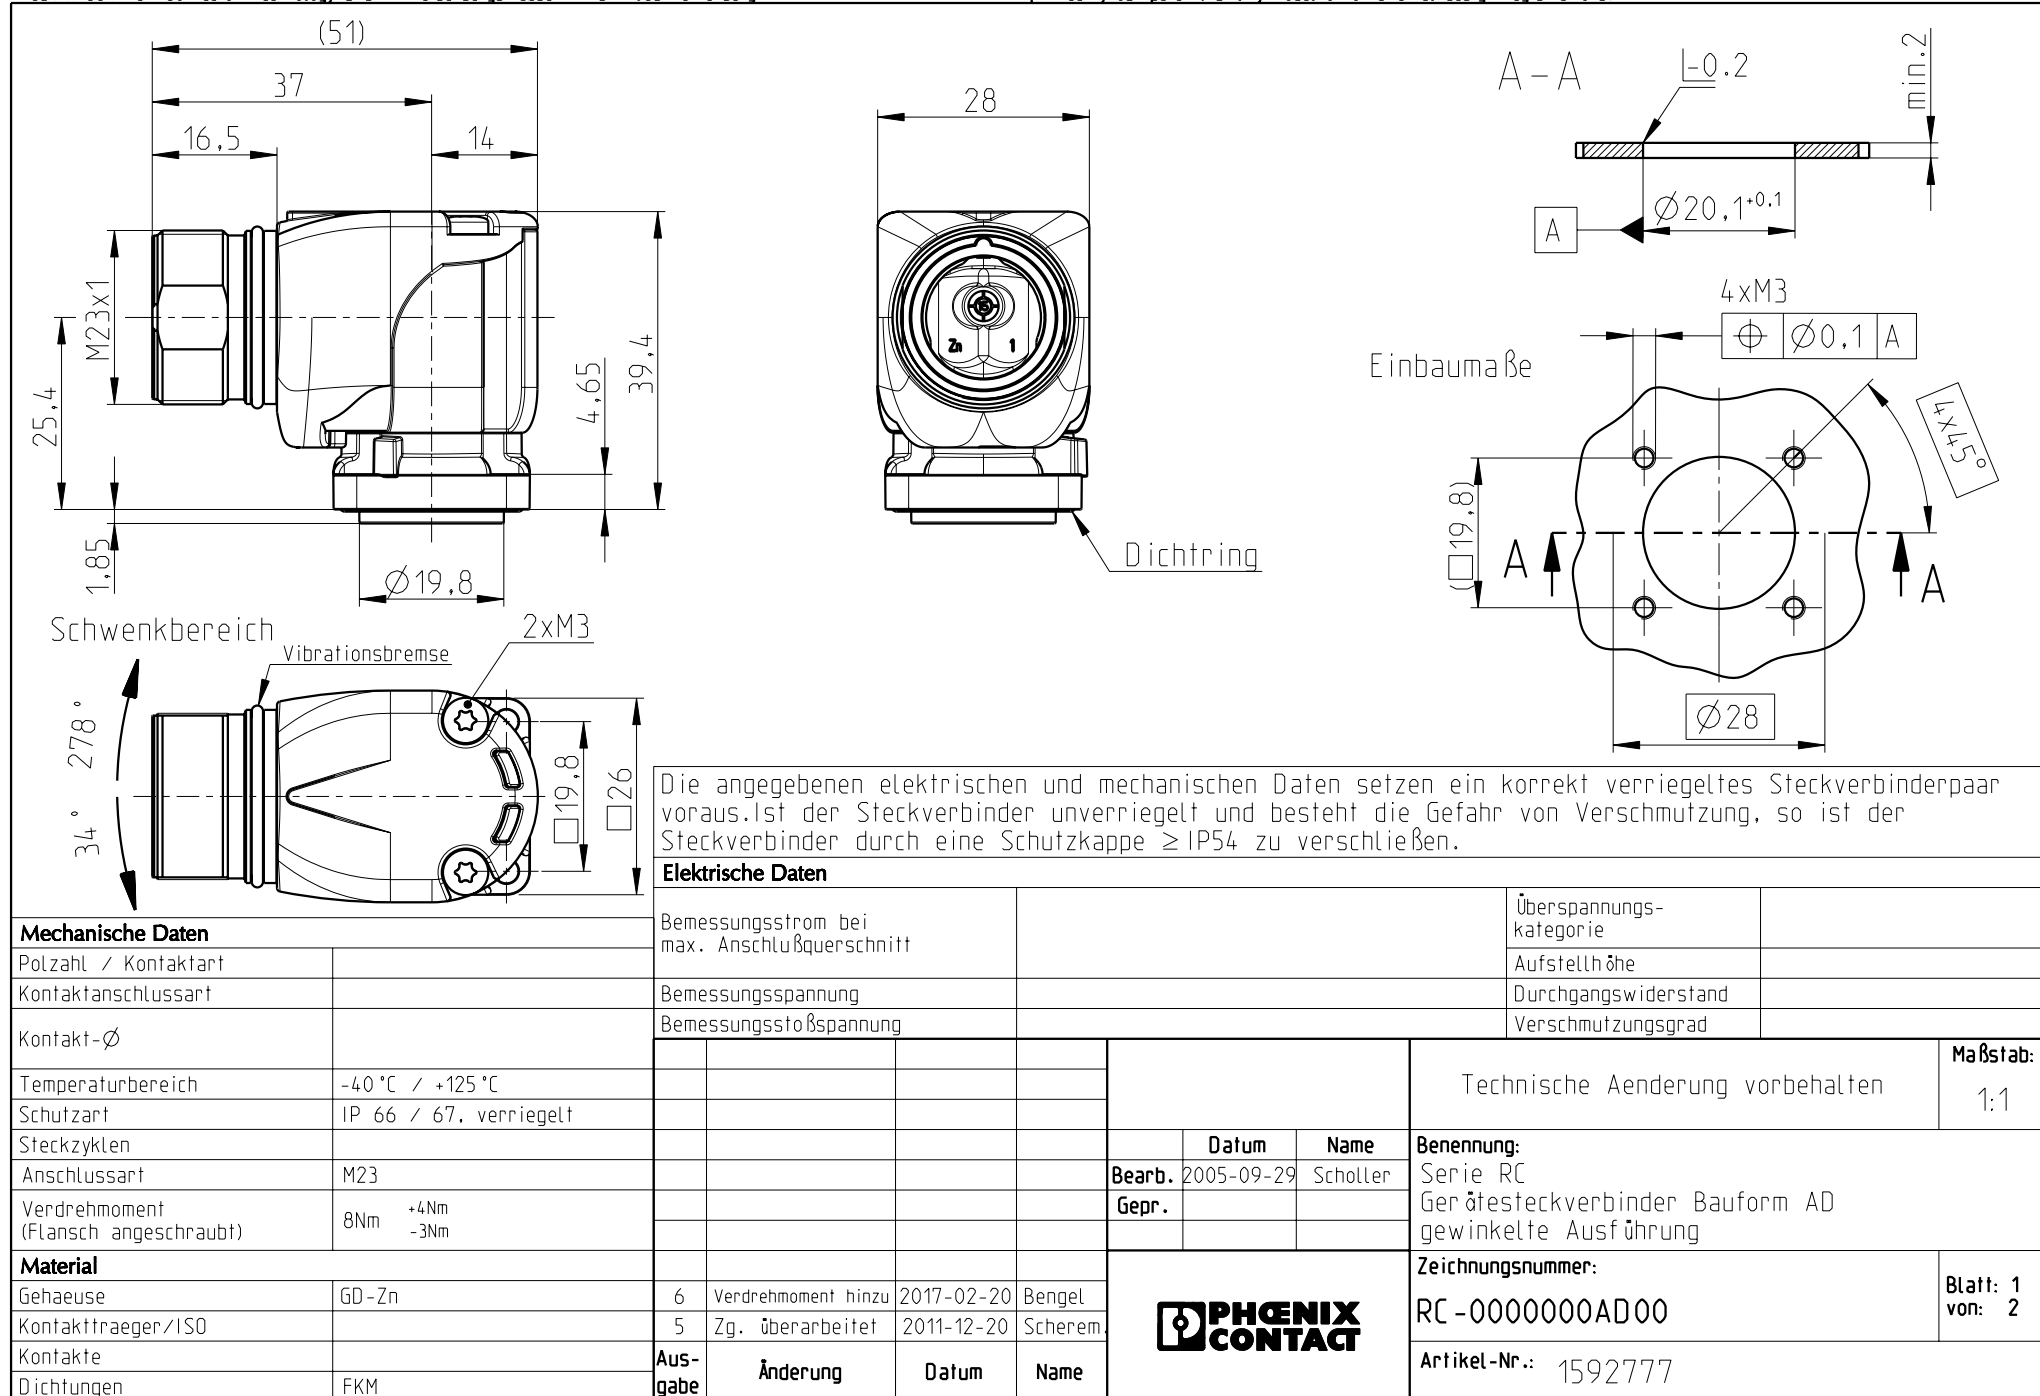


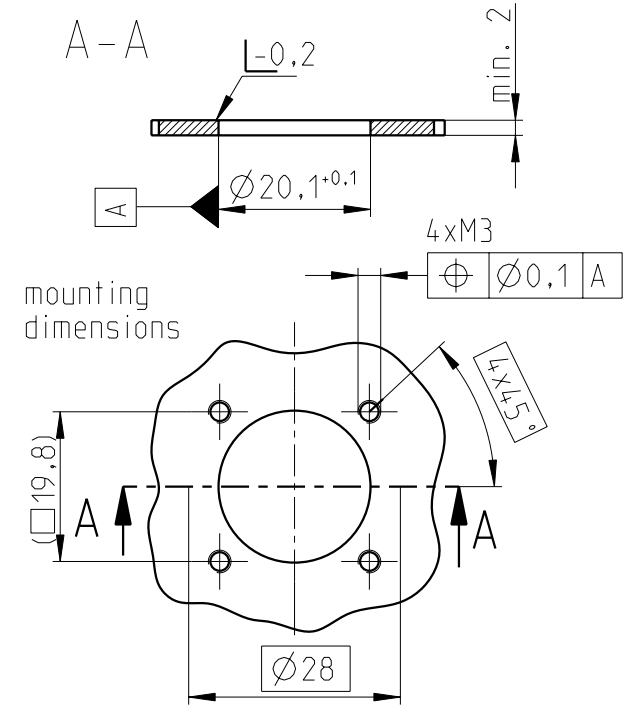

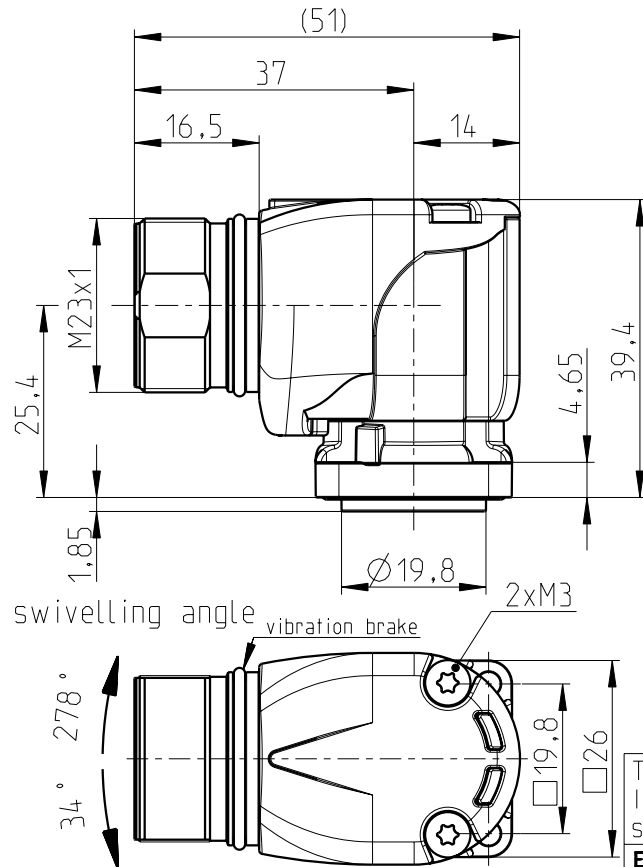

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Electrical Data

Mechanical Data		Rated current at max. cross section				Surge voltage category	
Number of pos./ Contact style						Installation height	
Contact termination						Contact resistance	
Contact-Ø						Degree of pollution	
Temperature range	-40 °C / +125 °C					technical changes reserved	
Degree of protection	IP 66 / 67, when locked						
Mechanical insertion/withdrawal cycles						description: Series RC Receptacle style AD angled version	
locking thread	M23						
torque (flange bolt-on)	8Nm +4Nm -3Nm					drawing no.: RC-0000000AD00	
Material							
Housing	GD-Zn					product no.: 1592777	
Insulating body							
Contacts		edition	changes	date	name	page: 2 of: 2	
Seal	FKM						

