



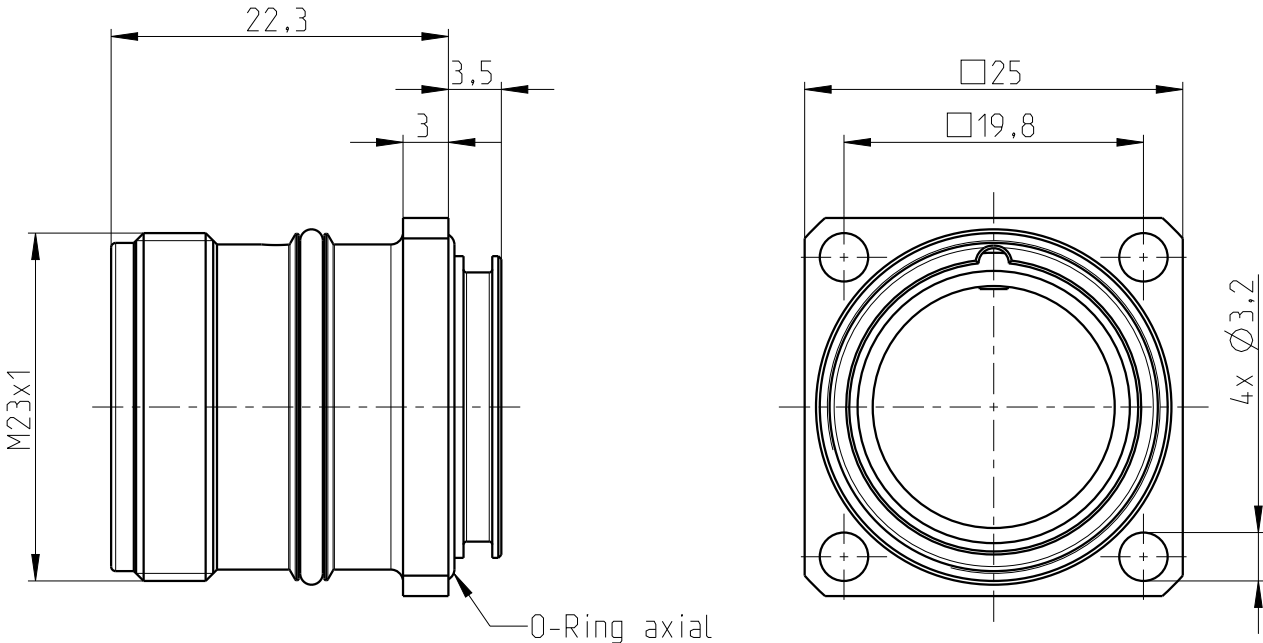

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten										
Bemessungsstrom bei max. Anschlußquerschnitt							Überspannungs-kategorie			
							Aufstellhöhe			
Bemessungsspannung							Durchgangswiderstand			
Bemessungsstoßspannung							Verschmutzungsgrad			
							Technische Aenderung vorbehalten		Maßstab: 2:1	
					Datum	Name	Benennung: Serie RC Gerätesteckverbinder Bauform WB Vorderwandmontage			
				Bearb.	2021-01-26	Kraut				
				Gepr.						
							Zeichnungsnummer: RC -0000000W B00		Blatt: 1 von: 2	
										
Aus-gabe	Änderung	Datum	Name				Artikel-Nr.: 1593019			

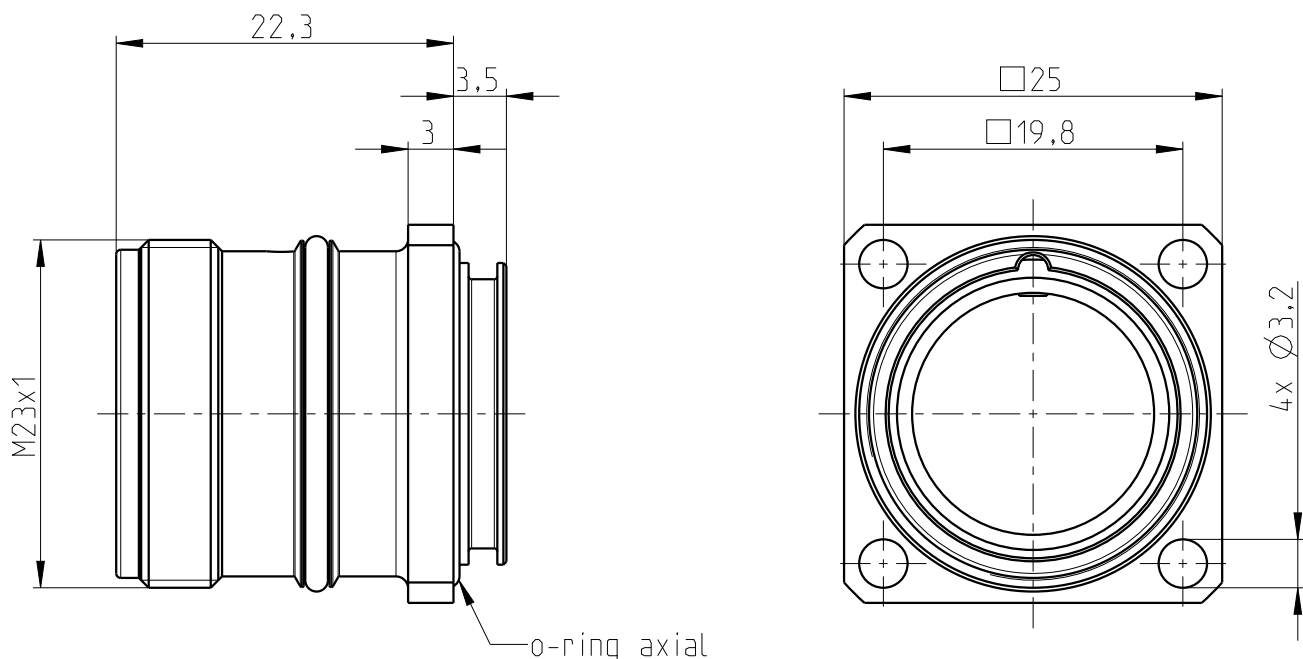

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap ≥ IP54.

		Electrical Data										
		Rated current at max. cross section							Surge voltage category			
Mechanical Data									Installation height			
Number of pos./ Contact style		Rated voltage							Contact resistance			
Contact termination		Rated surge voltage							Degree of pollution			
Contact-Ø									technical changes reserved		scale: 2:1	
Temperature range												
Degree of protection												
Mechanical insertion/withdrawal cycles						design	date	name	description: Series RC Receptacle Style WB Front mounting			
						chk.						
Material									drawing no.:		page: 2 of: 2	
Housing		CuZn / Ni							RC -0000000W B00			
Insulating body			see page 1									
Contacts		edition	changes	date	name				order-no.:		1593019	
Seal		FKM										