


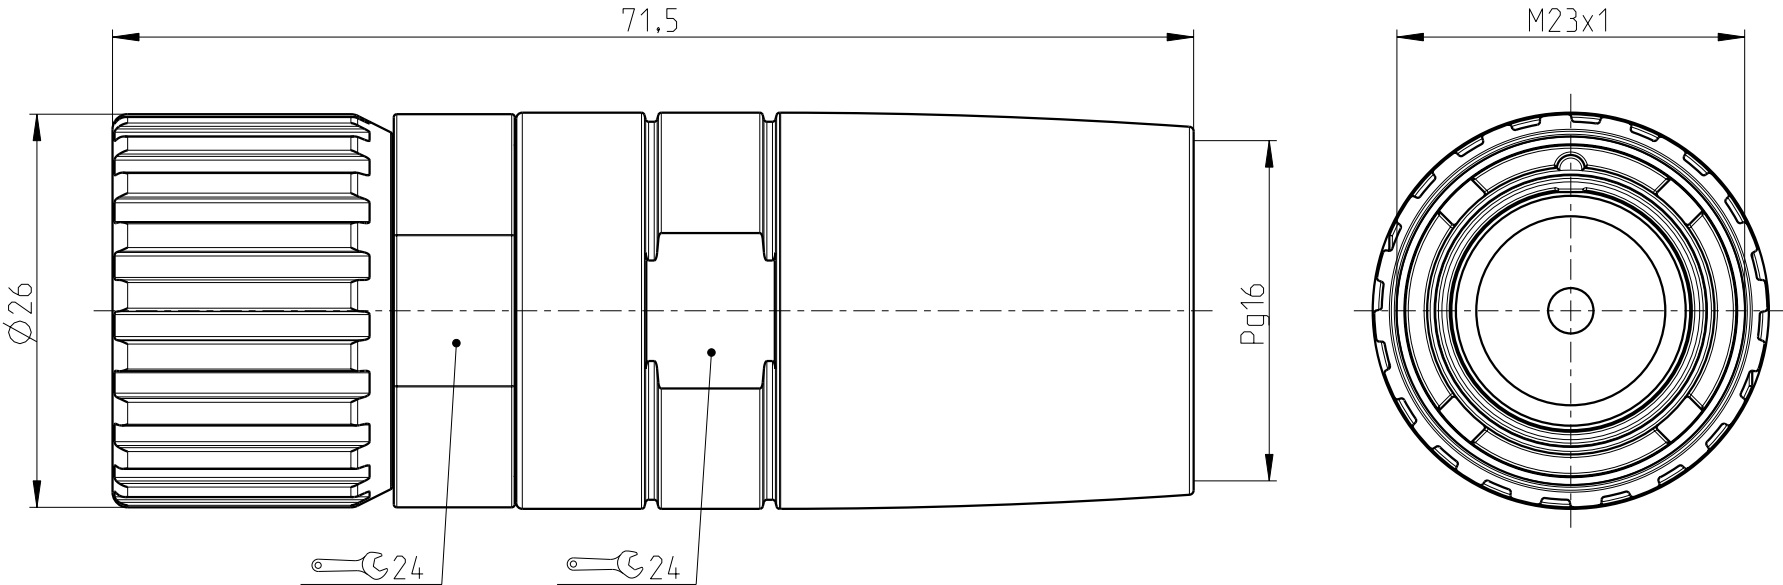


Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungskategorie			
						Aufstellhöhe			
Mechanische Daten		Bemessungsspannung				Durchgangswiderstand			
Polzahl / Kontaktart		Bemessungsstoßspannung				Verschmutzungsgrad			
Kontaktanschlussart						Technische Änderung vorbehalten		Maßstab: 2:1	
Kontakt-Ø									
Temperaturbereich	-40 °C / +110 °C					Benennung:		Serie UC Kabelsteckverbinder Bauform RN gerade Ausführung	
Schutzart	IP 67, verriegelt								
Steckzyklen									
Bedruckung	PHOENIX CONTACT					Zeichnungsnummer:		UC - 0000000RNDU	
Material									
Gehäuse	GD-Zn / CuZn Ni								
Kontaktträger/ISO						CONINVERS Ein Unternehmen der Phoenix Contact Gruppe		Artikel-Nr.: 1606061	
Kontakte		Ausgabe	Änderung	Datum	Name				
Dichtungen	FPM / NBR								

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmustieranmeldungen durchzuführen.
CONINVERS GmbH Heisenbergstrasse 1 D-71083 Herrenberg

The copying, distribution and utilisation of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

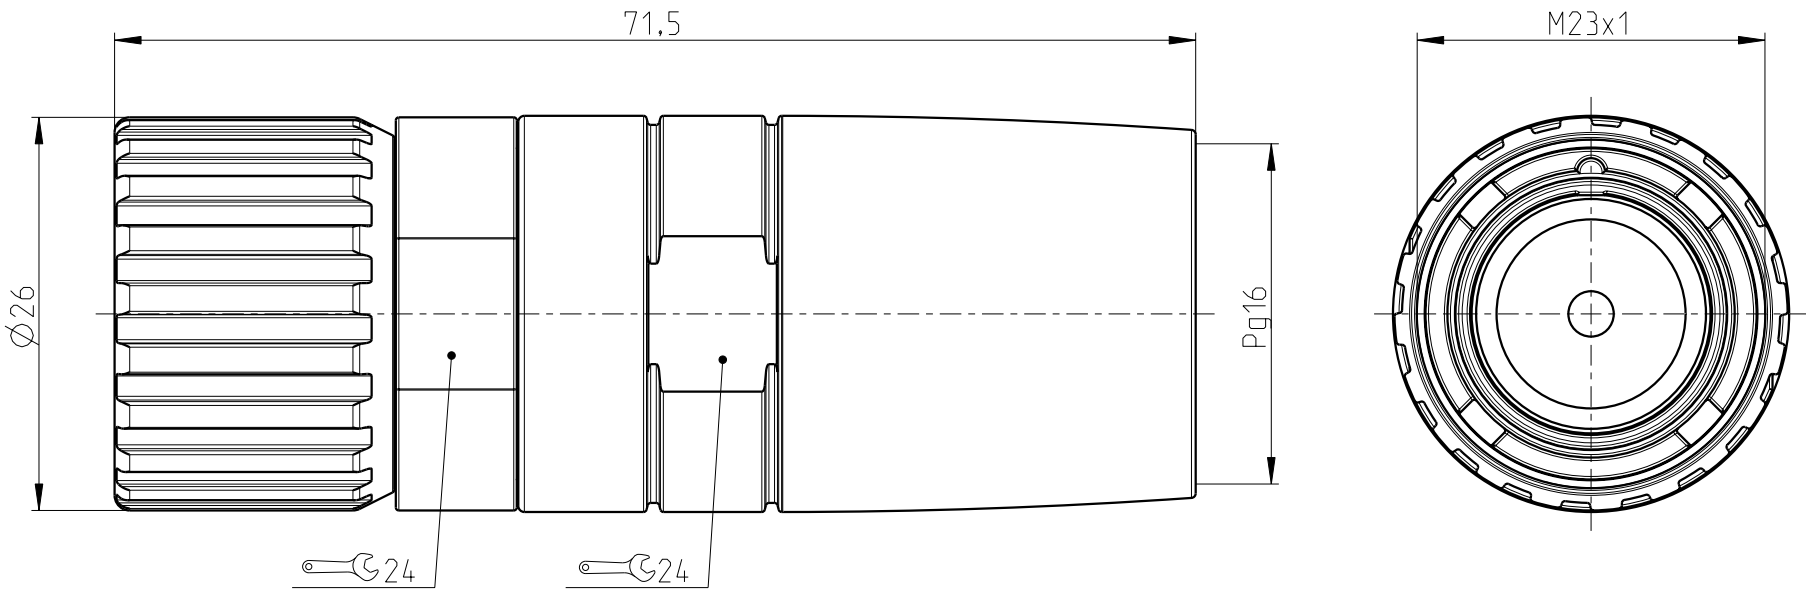

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

		Electrical Data												
		Rated current at max. cross section								Surge voltage category				
Mechanical Data										Installation height				
Number of pos./ Contact style		Rated voltage								Contact resistance				
Contact termination		Rated surge voltage								Degree of pollution				
Contact-Ø									technical changes reserved			scale: 2:1		
Temperature range		-40 °C / +110 °C								description: Series UC Cable connector Style RN Straight version				
Degree of protection		IP 67, when locked												
Mechanical insertion/withdrawal cycles														
Labeling		PHOENIX CONTACT								drawing no.: UC-0000000RNDU product no.: 1606061				
Material														
Housing		GD-Zn / CuZn Ni												
Insulating body				see page 1					CONINVERS A Company of Phoenix Contact Group			page: 2 of: 2		
Contacts														
Seal		FPM / NBR												
				edition	changes	date	name							