


Transfer or duplication of this document as well as the utilization or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Tolerance specifications do not include clearances inherent in the design.

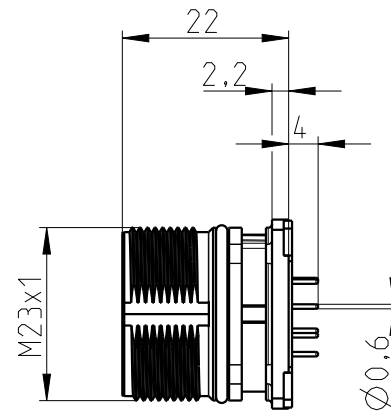

Technical drawing of a square connector. The drawing shows a top view of the component, which is square-shaped with a central circular feature. The overall width is 25 mm, and the width of the central circular feature is 19,8 mm. The drawing includes 12 numbered callouts (1-12) pointing to various features: 1 points to the top edge of the central circle, 2 points to the top edge of the outer square, 3 points to the top edge of the inner square, 4 points to the top edge of the bottom flange, 5 points to the top edge of the bottom flange, 6 points to the top edge of the bottom flange, 7 points to the top edge of the bottom flange, 8 points to the top edge of the bottom flange, 9 points to the top edge of the bottom flange, 10 points to the top edge of the bottom flange, 11 points to the top edge of the bottom flange, and 12 points to the top edge of the bottom flange. The bottom flange has four mounting holes, each with a diameter of 3,2 mm, indicated by the dimension 4x Ø 3,2.

- EN ISO 291 23/50

 DIN A3		document-no. / ri 97653261 / 100	article-no. 1619949	scale 1:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		date 29.07.24	document-type TECDOC 2D_Productdrawing		
page 1 of 1		description C A-12S1N222S00			