
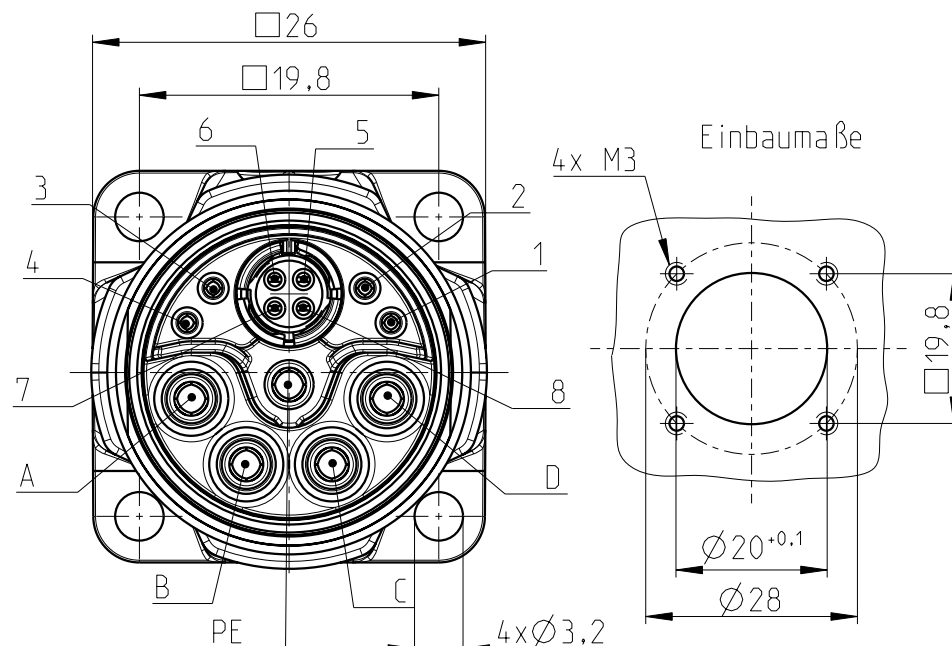


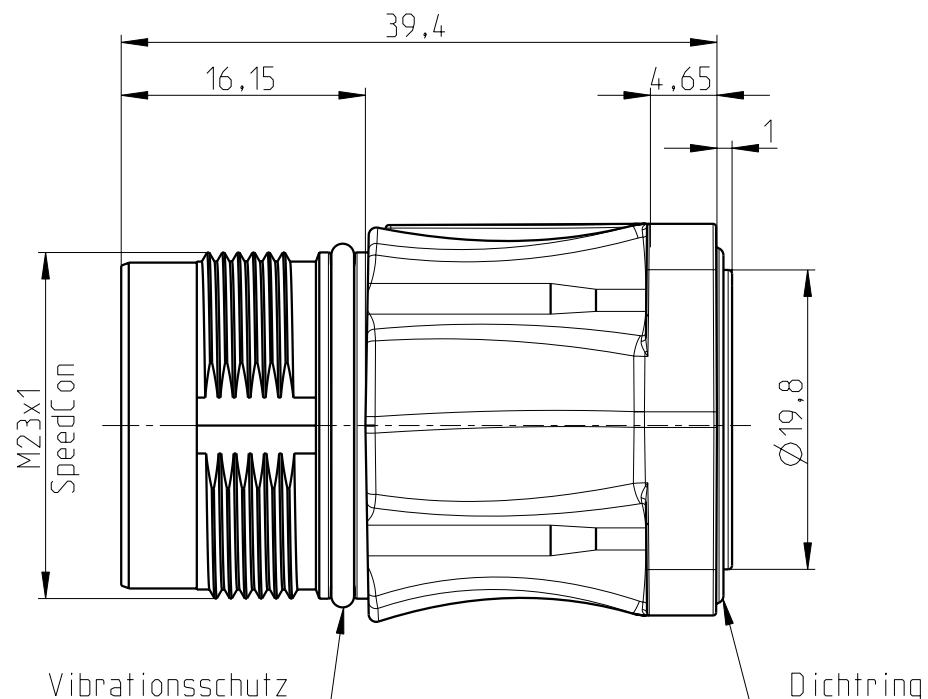

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten

Bemessungsstrom bei max. Anschlußquerschnitt	2mm Kontakt max. 30A bei 4.0mm ² 1mm Kontakt max. 8A bei 1.0mm ² 0.8mm Kontakt max. 4A bei 0.5mm ² T _u = 25 °C	Überspannungs- kategorie	III nach DIN EN 60664-1:2008
		Aufstellhöhe	bis 3000m
Bemessungsspannung	630V / 50V nach DIN EN 60664-1:2008	Durchgangswiderstand	<3mΩ
Bemessungsstoßspannung	6000V / 1500V nach DIN EN 60664-1:2008	Verschmutzungsgrad	3 nach DIN EN 61984:2009

Mechanische Daten

Polzahl / Kontaktart	4+8+PE / Buchse
Kontaktanschlußart	Crimp
Kontakt-Ø	
Temperaturbereich	-20 °C / +125 °C
Schutzart	IP 67, verriegelt
Steckzyklen	100

Material

Gehäuse	GD-Zn
Kontakttträger/ISO	PA 66 / UL 94 V0
Kontakte	
Dichtungen	FKM




					Technische Änderung vorbehalten		Maßstab: 2:1	
					Datum	Name	Benennung: Serie SH Gerätesteckverbinder Bauform WA Hybrid / SpeedCon	
				Bearb.	2014-05-06	Bengel		
				Gepr.				
2	AAB160104 Distanzhülse ersetzt	2019-02-05	Epple		Zeichnungsnummer:		Blatt: 1 von: 2	
1	Rahmen aktualisiert	2015-06-18	Kraut		SH-8ESC58AW A00S			
Aus- gabe	Änderung	Datum	Name		Artikel Nr.: 1621567			



Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen.

PHOENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg

The copying, distribution and utilization of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

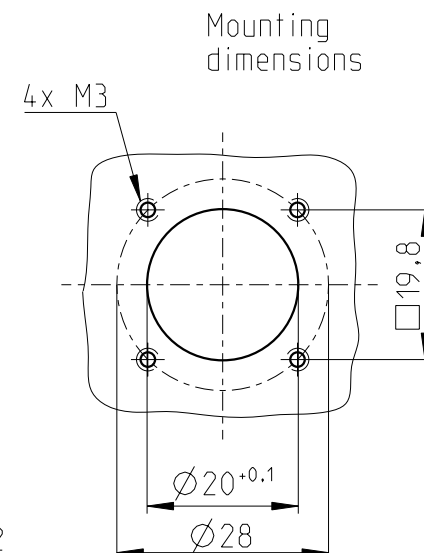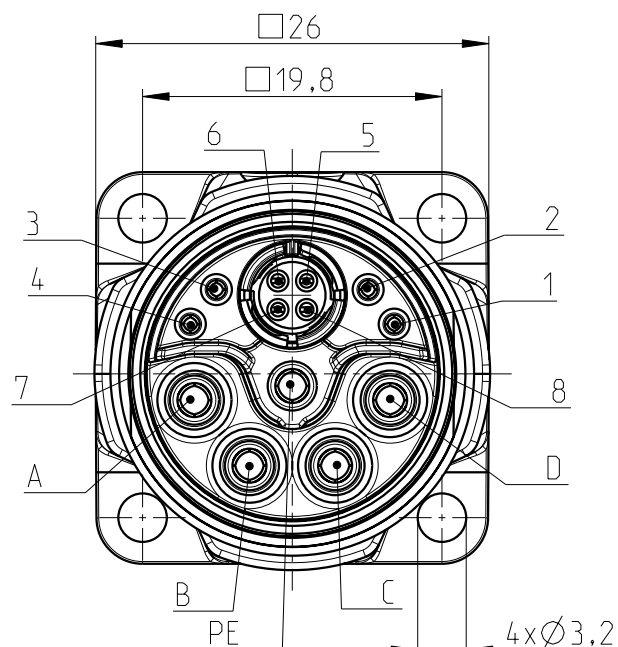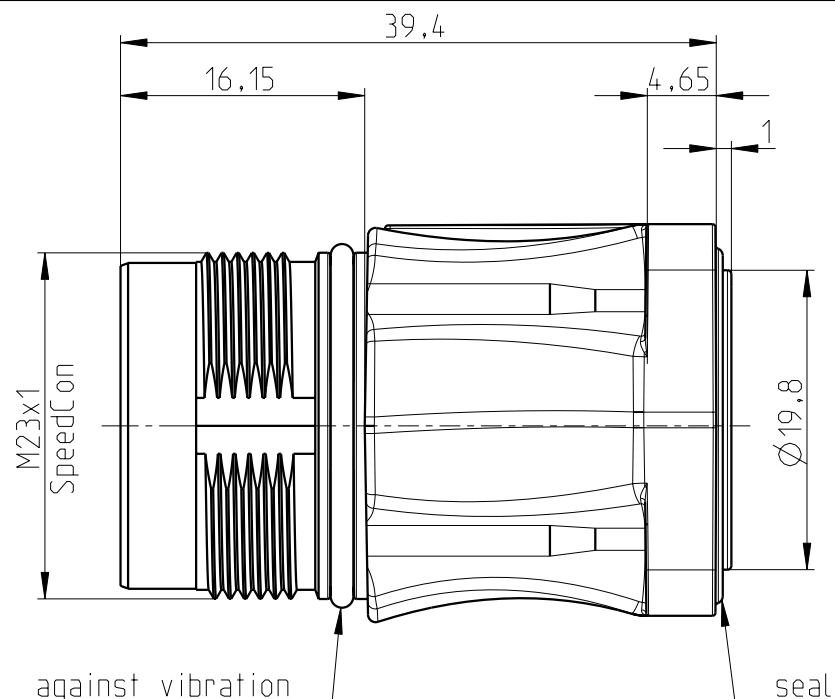

The specified electrical and mechanical data require a correctly locked pair of connectors. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Electrical Data

Rated current at max. cross section	2mm Contact max. 30A at cross section 4.0mm ² 1mm Contact max. 8A at cross section 1.0mm ² 0.8mm Contact max. 4A at cross section 0.5mm ² Tamb = 25 °C	Surge voltage category	III according to EN 60664-1:2008
		Installation height	up to 3000m
Rated voltage	630V / 50V acc. to EN 60664-1:2008	Contact resistance	<3mΩ
Rated surge voltage	6000V / 1500V acc. to EN 60664-1:2008	Degree of pollution	3 acc. to EN 61984:2009

Mechanical Data

Number of pos./ Contact style	4+8+PE / socket
Contact termination	crimp
Contact-Ø	
Temperature range	-20 °C / +125 °C
Degree of protection	IP 67, when locked
Mechanical insertion/withdrawal cycles	100

Material

Housing	GD-Zn
Insulating body	PA 66 / UL 94 V0
Contacts	
Seal	FKM

[illegible]