
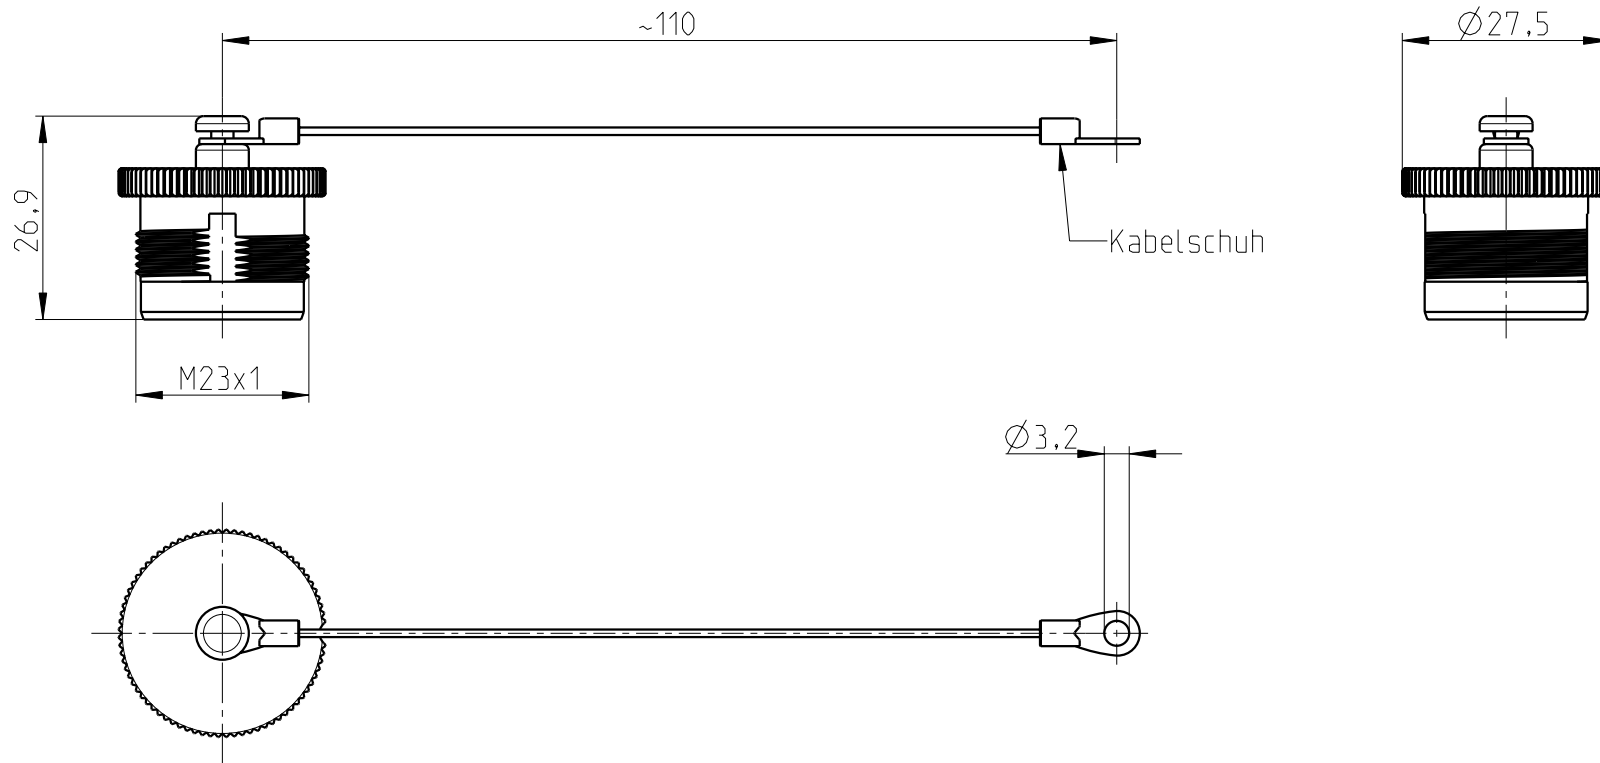


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen.

PHOENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg

The copying, distribution and utilization of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

[illegible]

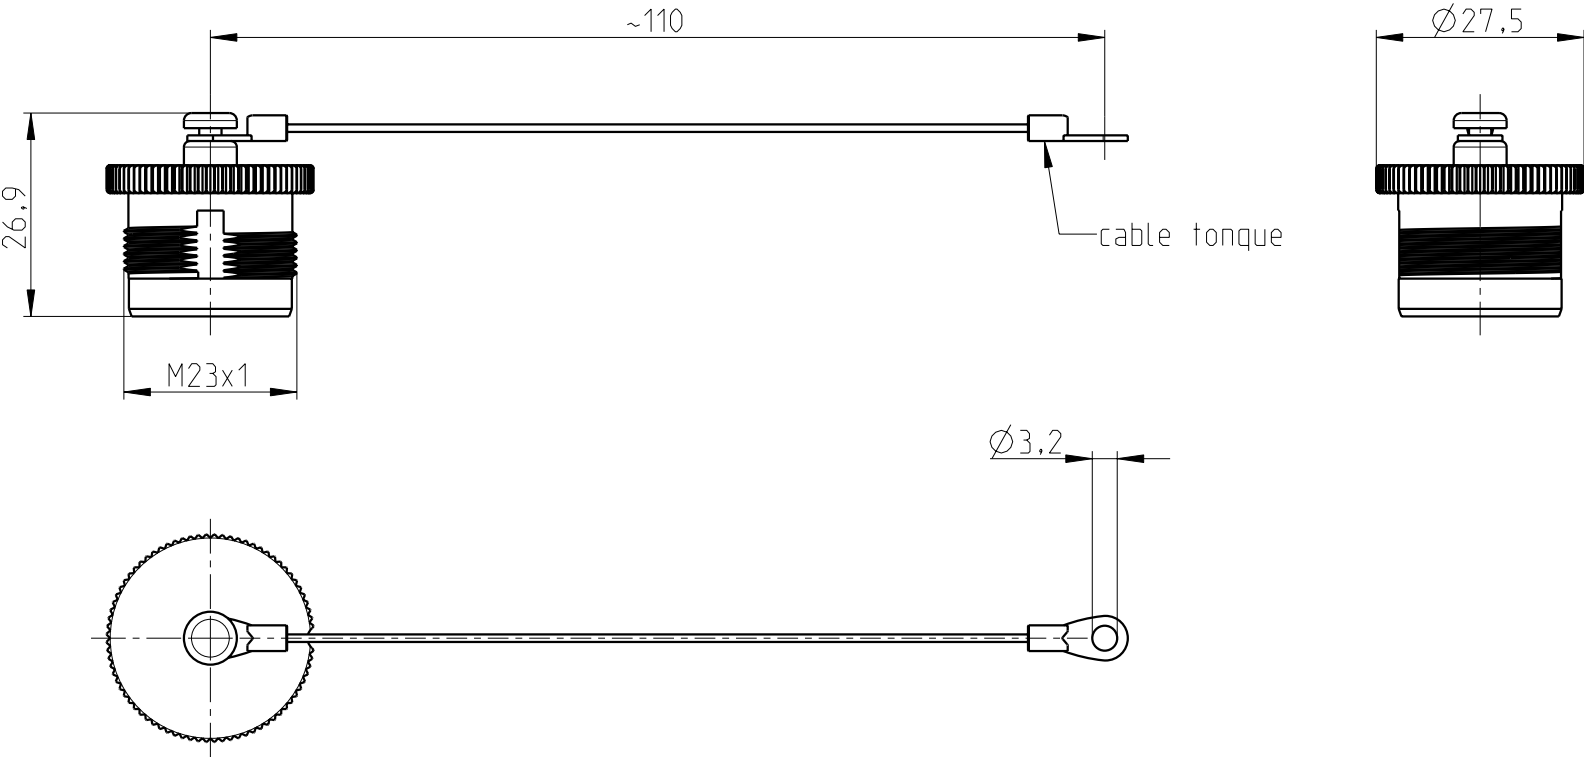

		Electrical Data											
Mechanical Data		Rated current at max. cross section								Surge voltage category			
										Installation height			
Number of pos./ Contact style		Rated voltage								Contact resistance			
Contact termination		Rated surge voltage								Degree of pollution			
Contact-Ø									technical changes reserved			scale: 1:1	
Temperature range		-40 °C / +125 °C											
Degree of protection		IP67											
Mechanical insertion/withdrawal cycles						design	2015-05-20	name	Thumm	description: Series SH Metal protection cap with cord for cable connectors (no SPEEDCON)			
						chk.							
Material									drawing no.:			page: 2 of: 2	
Housing		CuZn / Ni							SH-Z2305				
Insulating body		see page 1							order-no.:			1623803	
Contacts		edition	changes	date	name								
Seal													