



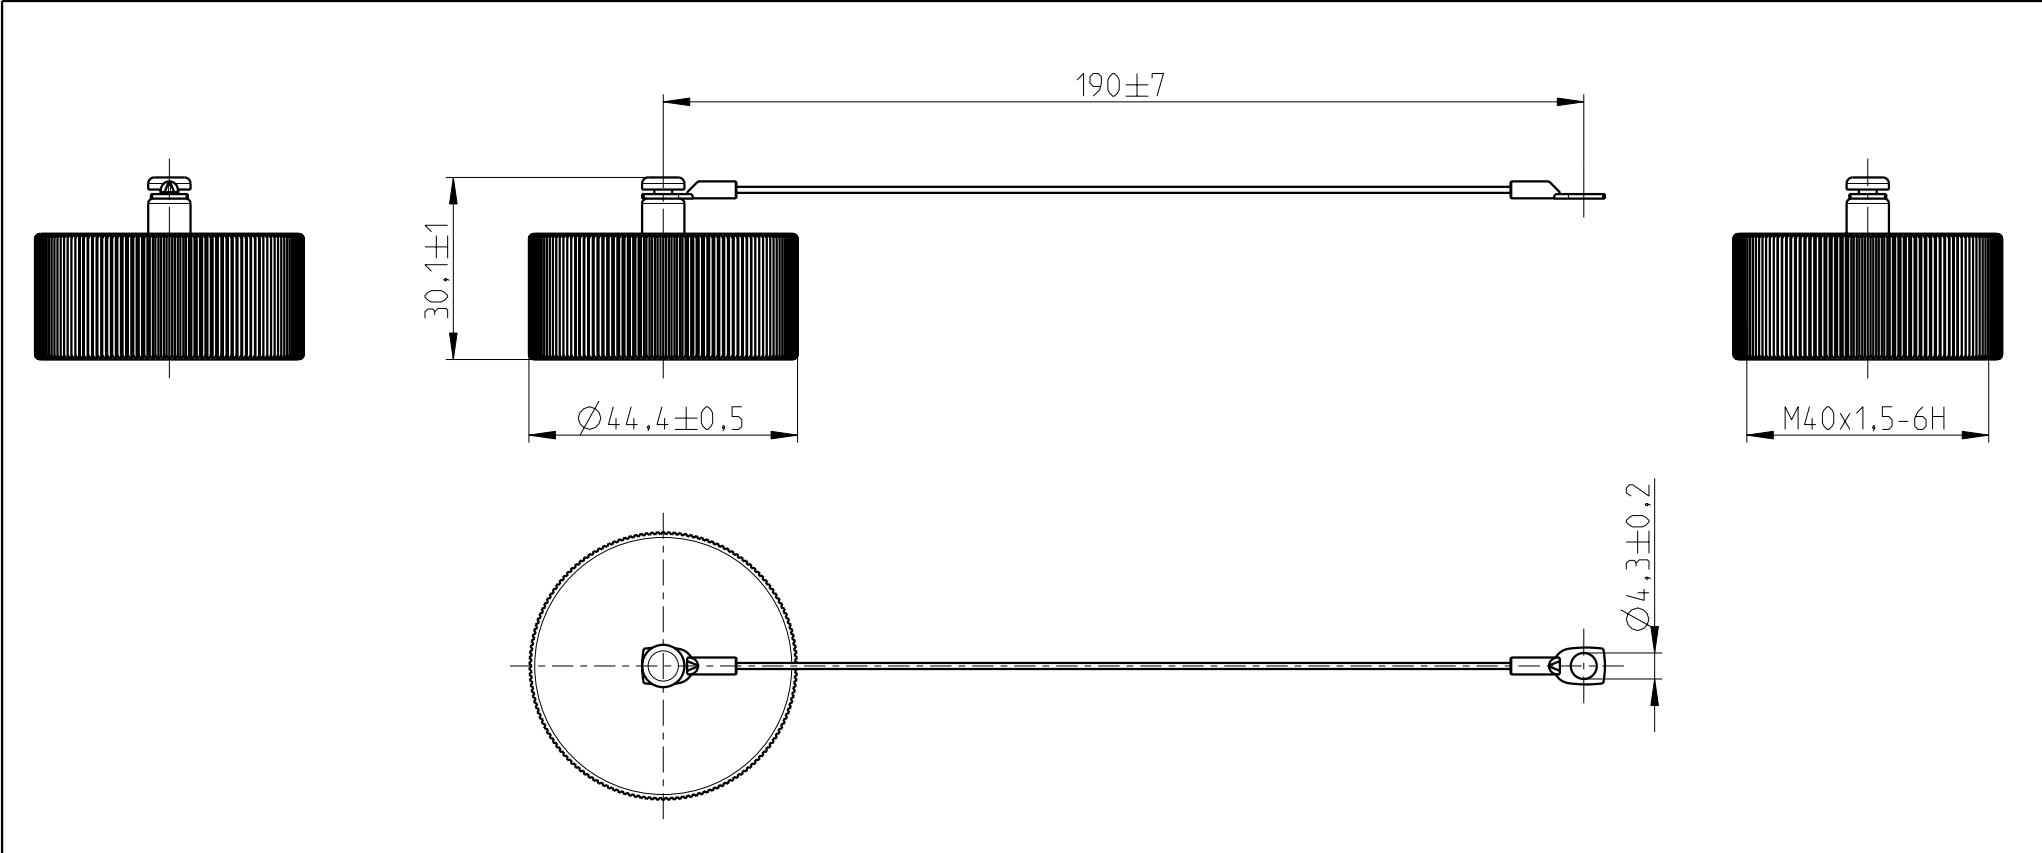

		Elektrische Daten													
		Bemessungsstrom bei max. Anschlußquerschnitt								Überspannungskategorie					
										Aufstellhöhe					
Mechanische Daten		Bemessungsspannung								Durchgangswiderstand					
Polzahl / Kontaktart		Bemessungsstoßspannung								Verschmutzungsgrad					
Kontaktanschlussart									Technische Aenderung vorbehalten				Maßstab: 4:5		
Kontakt-Ø															
Temperaturbereich		-40 °C / +130 °C					Datum	Name		Benennung: Serie SB und SM Metall-Staubschutzkappe mit Befestigungsseil für Geräte- und Kupplungssteckverbinder					
Schutzart		IP68 / IP6k9k					Bearb.	2015-06-03 Bengel							
Steckzyklen							Gepr.								
		4	Temperatur geändert		2017-02-07	Gulde									
Material		3	Länge von 150 auf 190 ge.ä.		2017-01-20	Bengel				Zeichnungsnummer:				Blatt: 1 von: 2	
Gehaeuse		2	O-Ring #5013560 hinzu		2016-10-10	Bengel				SB-Z0002					
Kontakttraeger/ISO		1	A14 160002/41		2016-09-01	Gulde									
Kontakte		Ausgabe		Änderung		Datum				Name		Artikel Nr.: 1623828			
Dichtungen		FKM													

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen.
PHOENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg

The copying, distribution and utilisation of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

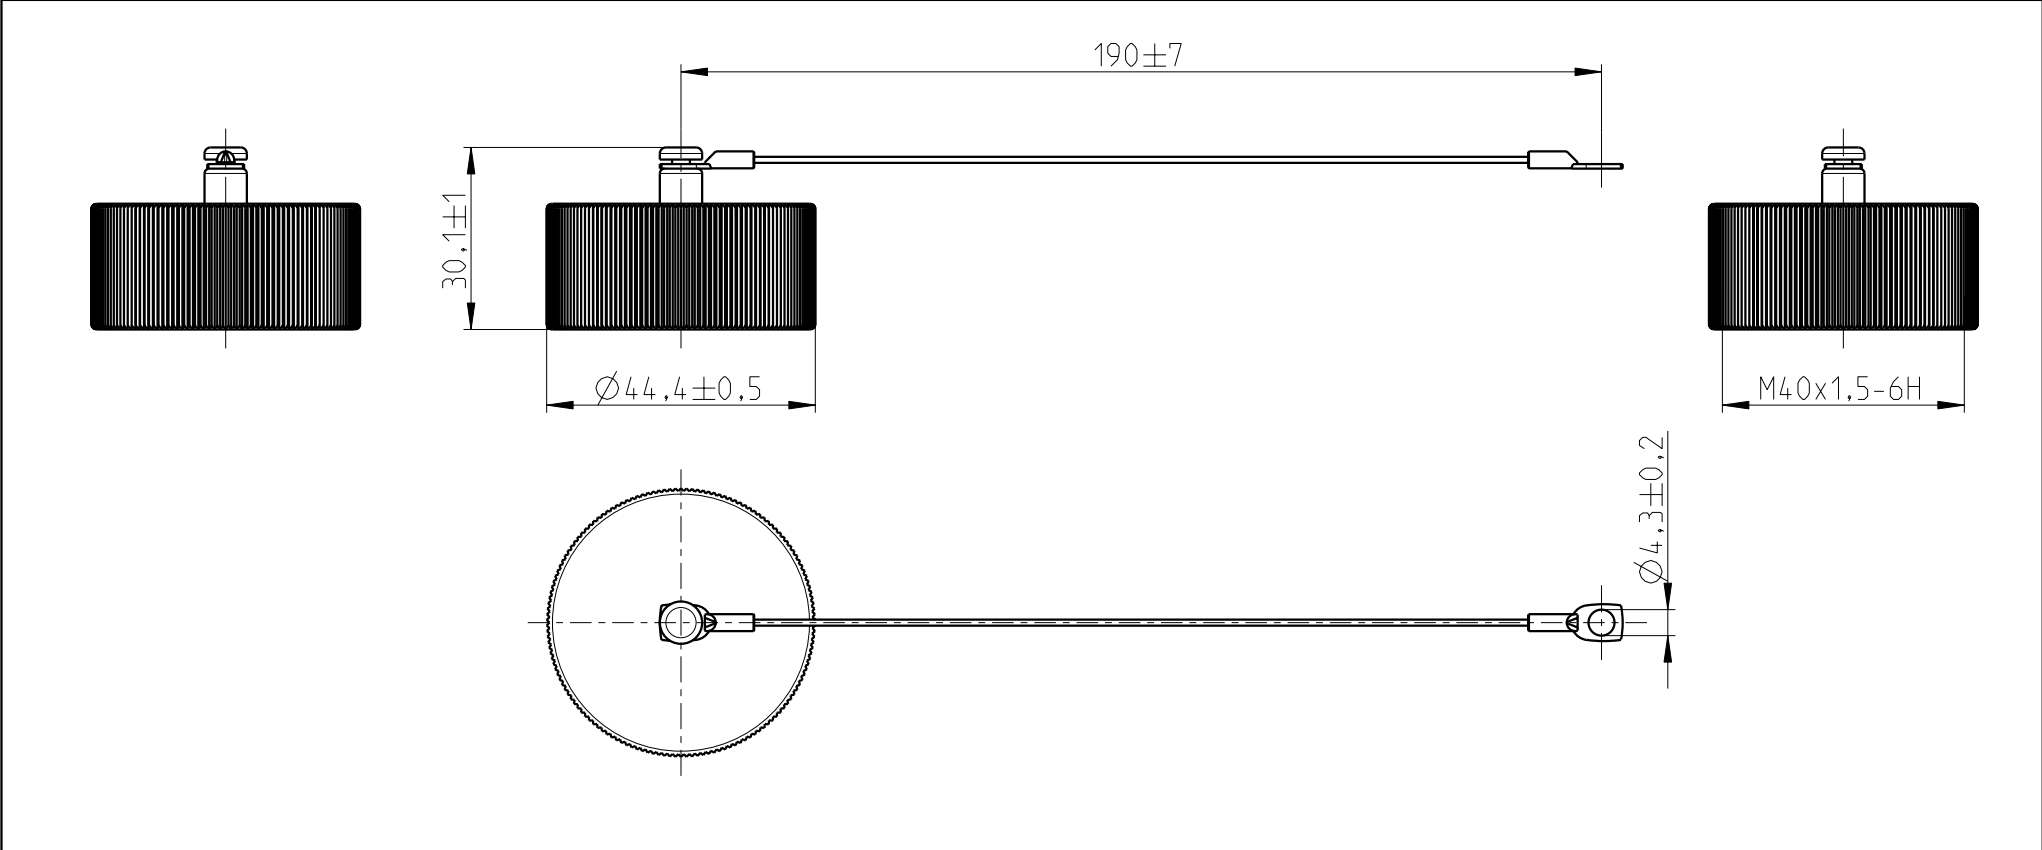

		Electrical Data													
Mechanical Data		Rated current at max. cross section								Surge voltage category					
										Installation height					
Number of pos./ Contact style		Rated voltage								Contact resistance					
Contact termination		Rated surge voltage								Degree of pollution					
Contact-Ø									technical changes reserved			scale: 4:5			
Temperature range		-40 °C / +130 °C													
Degree of protection		IP68 / IP6k9k													
Mechanical insertion/withdrawal cycles						design	2015-06-03	Bengel	description: Series SB and SM Metal protection cap with steel cord for receptacles and cable connecting receptacles						
						chk.									
Material									drawing no.:			page: 2 of: 2			
Housing		CuZn / Ni									SB-Z0002				
Insulating body				see page 1							order no.: 1623828				
Contacts		edition	changes	date	name										
Seal		FKM													