



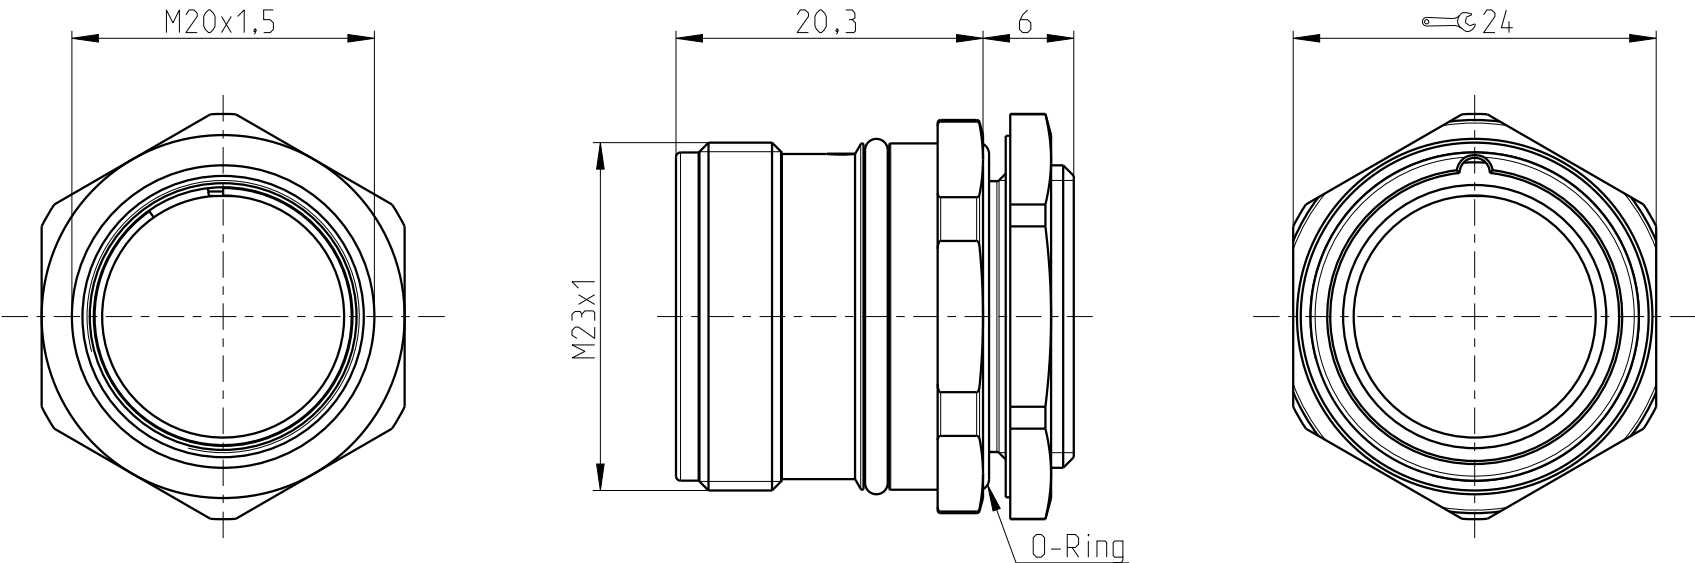

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungs- kategorie			
						Aufstellhöhe			
Bemessungsspannung						Durchgangswiderstand			
Bemessungsstoßspannung						Verschmutzungsgrad			
							Technische Änderung vorbehalten		Maßstab: 2:1
					Datum	Name	Benennung: Serie RC Gerätesteckverbinder Bauform 6F Vorderwandmontage		
				Bearb.	16.01.09	Scheremet			
				Gepr.					
							Zeichnungsnummer: RC -00000006F00		
2	Rahmen angepasst	2022-04-13	Epple						
1	27/04/10-1 Temp. geändert	2010-05-17	Jockovic						
Aus- gabe	Änderung	Datum	Name				Artikel Nr.: 1625061		

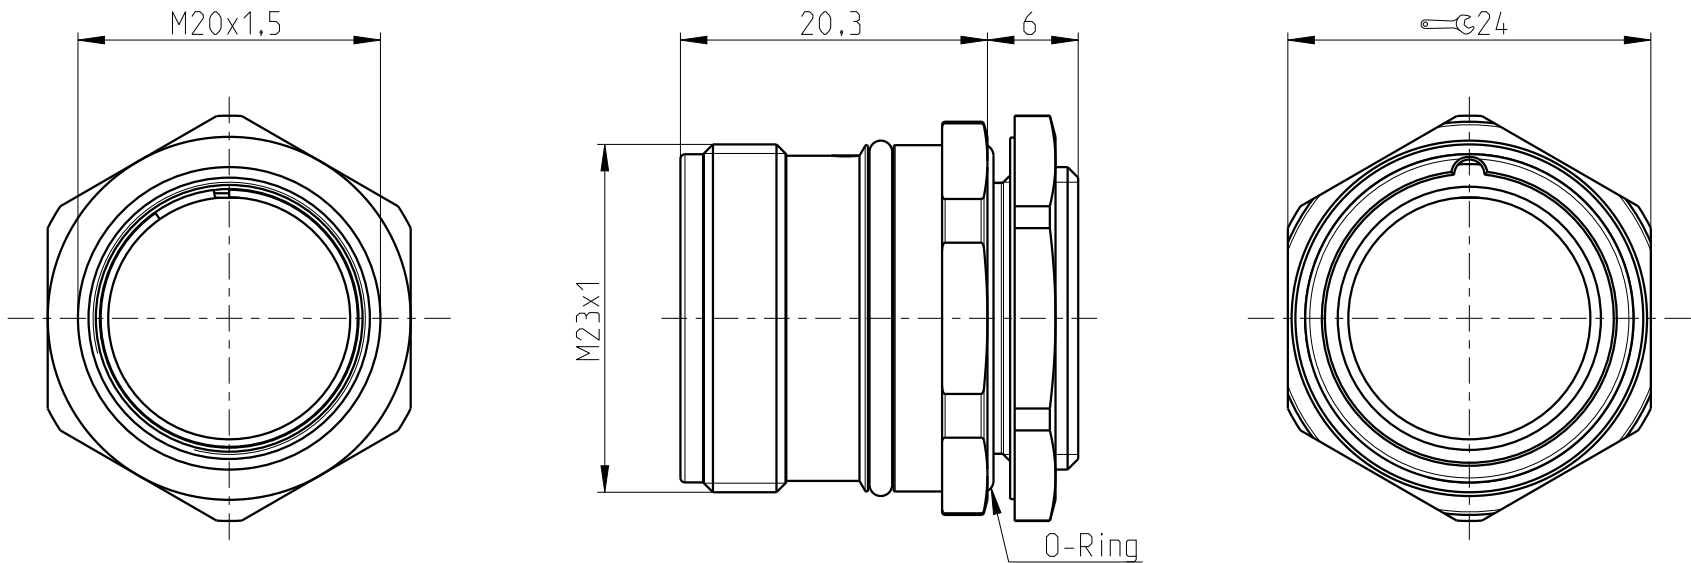

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Electrical Data										
Rated current at max. cross section							Surge voltage category			
							Installation height			
Rated voltage							Contact resistance			
Rated surge voltage							Degree of pollution			
							technical changes reserved		scale: 2:1	
					date	name	description: Series RC Receptacle Style 6F Front mounting			
				design	16.01.09	Scheremet				
				chk.						
							drawing no.: RC-00000006F00			page: 2 of: 2
	see page 1						order no.: 1625061			
edition	changes	date	name							