


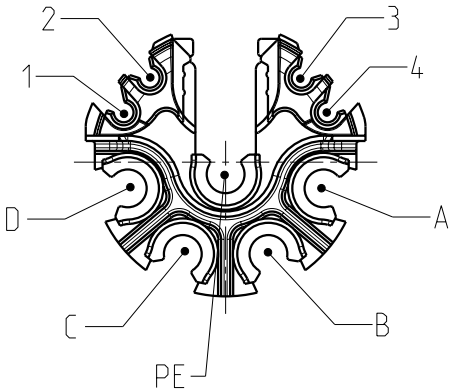


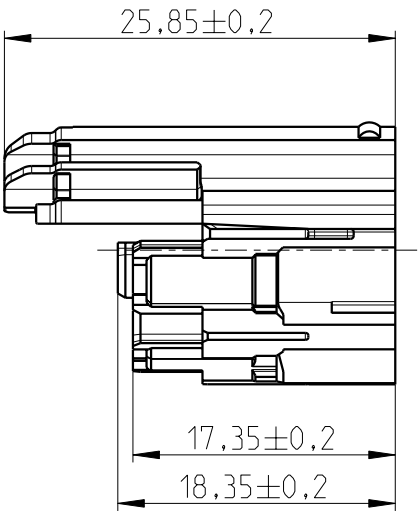

Die angegebenen elektrischen Werte setzen den Einsatz des Kontaktträgers in einer Anwendungsumgebung der Schutzart $\geq$ IP54 (gem. IEC 60529) voraus.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungskategorie			
						Aufstellhöhe			
Mechanische Daten		Bemessungsspannung				Durchgangswiderstand			
Polzahl / Kontaktart	4+4+PE+4 / Stift	Bemessungsstoßspannung				Verschmutzungsgrad			
Kontaktanschlussart						Technische Änderung vorbehalten		Maßstab: 2:1	
Kontakt-Ø									
Temperaturbereich	-20 °C / +125 °C					Benennung:		Serie SH Kontaktträger	
Schutzart									
Steckzyklen									
Bedruckung						Zeichnungsnummer:		SH-8EP008A0000	
Material									
Gehäuse									
Kontaktträger/ISO	PA 66					Artikel-Nr.: 1627080		Blatt: 1 von: 2	
Kontakte		Ausgabe	Änderung	Datum	Name				
Dichtungen									

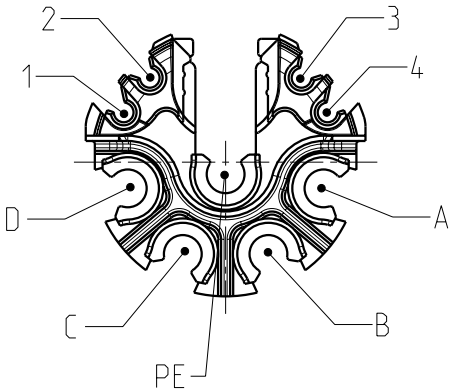

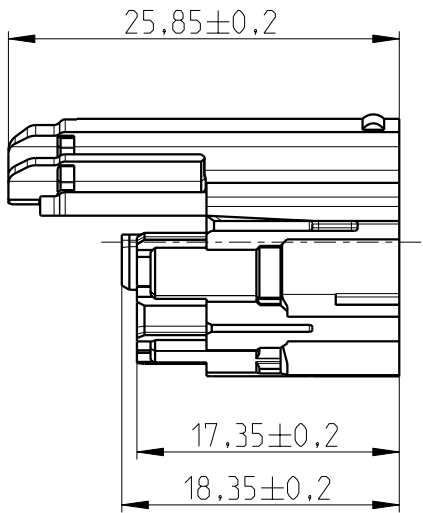

The electrical values given require the contact carrier to be used in application environments with a degree of protection $\geq$ IP54 (in acc. with IEC 60529).

Mechanical Data

Number of pos./ Contact style	4+4+PE+4 / pin
Contact termination	
Contact-Ø	
Temperature range	-20 °C / +125 °C
Degree of protection	
Mechanical insertion/withdrawal cycles	
Material	
Housing	
Insulating body	PA 66
Contacts	
Seal	

Electrical Data									
Rated current at max. cross section							Surge voltage category		
							Installation height		
Rated voltage							Contact resistance		
Rated surge voltage							Degree of pollution		
							technical changes reserved		scale: 2:1
					date	name	description: Series SH Contact carrier		
				design	2016-07-07	Gorbachev			
				chk.					
							drawing no.: SH-8EP008A0000		page: 2 of: 2
	see page 1						order-no.: 1627080		
edi	changes	date	name						
tion									