

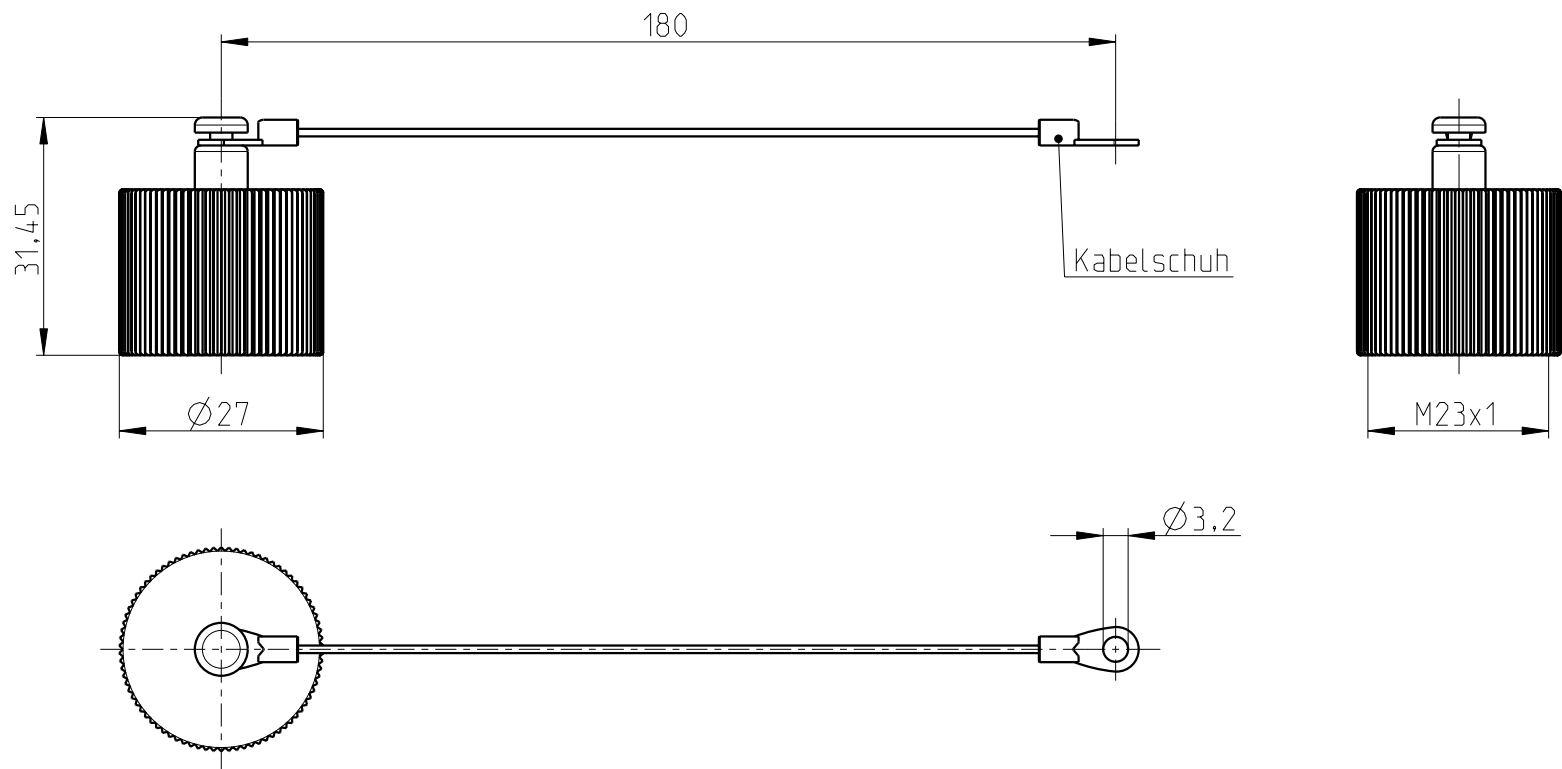




Elektrische Daten									
Mechanische Daten		Bemessungsstrom bei max. Anschlußquerschnitt				Überspannungskategorie			
		Bemessungsspannung				Aufstellhöhe			
		Bemessungsstoßspannung				Durchgangswiderstand			
Polzahl / Kontaktart						Technische Änderung vorbehalten		Maßstab: 1:1	
Kontaktanschlußart									
Kontakt-Ø						Benennung: Serie SH Metall-Staubschutzkappe mit Seil für Gerätesteckverbinder		Blatt: 1 von: 2	
Temperaturbereich	-40 °C / +125 °C								
Schutzart	IP67								
Steckzyklen									
Material						Zeichnungsnummer: SH-Z2302-PXC_0001			
Gehäuse	CuZn / Ni	2	Kabelschuh geändert	2018-09-26	Eppler				
Kontaktträger/ISO		1	AAB170009 Seillänge geändert	2017-02-09	Gulde	Artikel-Nr.: 1627491			
Kontakte		Aus-	Änderung	Datum	Name				
Dichtungen	FKM	gabe							

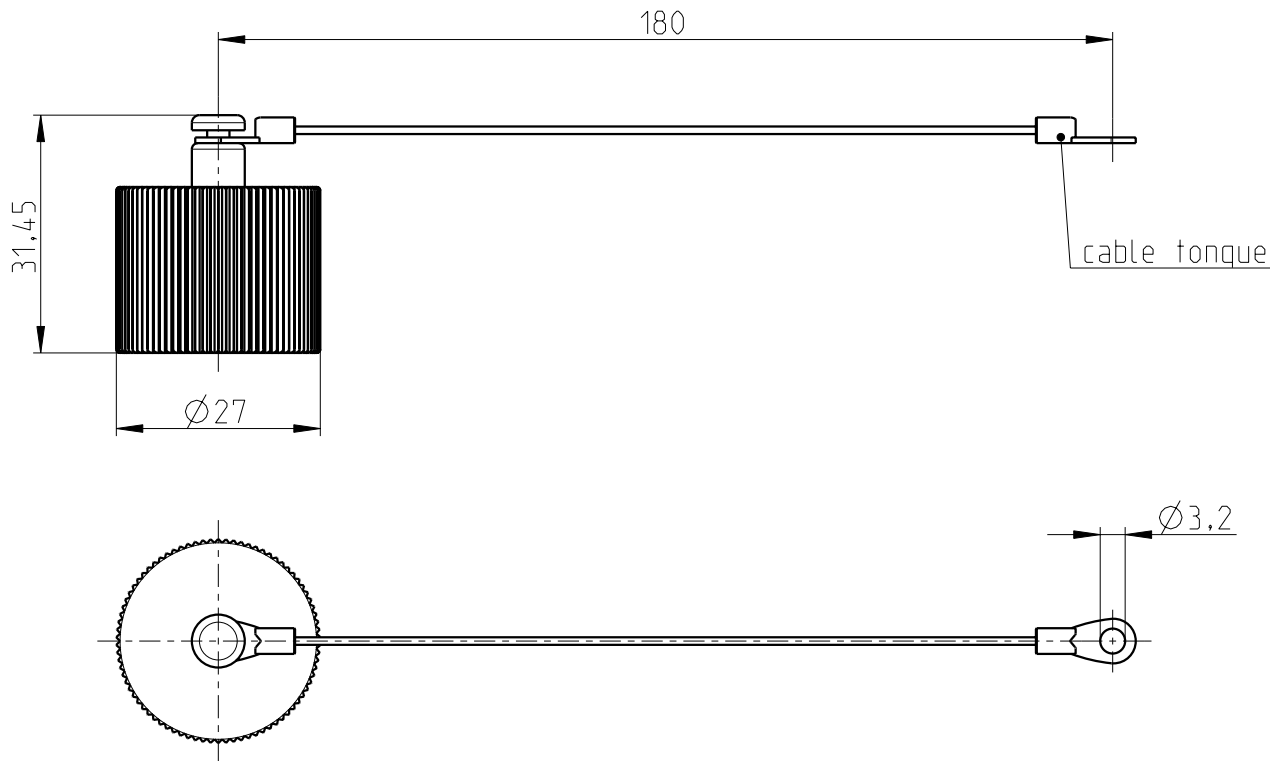

		Electrical Data															
		Rated current at max. cross section								Surge voltage category							
Mechanical Data										Installation height							
Number of pos./ Contact style		Rated voltage								Contact resistance							
Contact termination		Rated surge voltage								Degree of pollution							
Contact-Ø									technical changes reserved			scale: 1:1					
Temperature range		-40 °C / +125 °C								description: Series SH Metal protection cap with cord for receptacles							
Degree of protection		IP67															
Mechanical insertion/withdrawal cycles							design	2016-02-18	name	Kraut	drawing no.: SH-Z2302-PXC_0001						
							chk.										
Material										page: 2 of: 2							
Housing		CuZn / Ni				order-no.: 1627491											
Insulating body		see page 1															
Contacts		edition								changes			date			name	
Seal		FKM															