



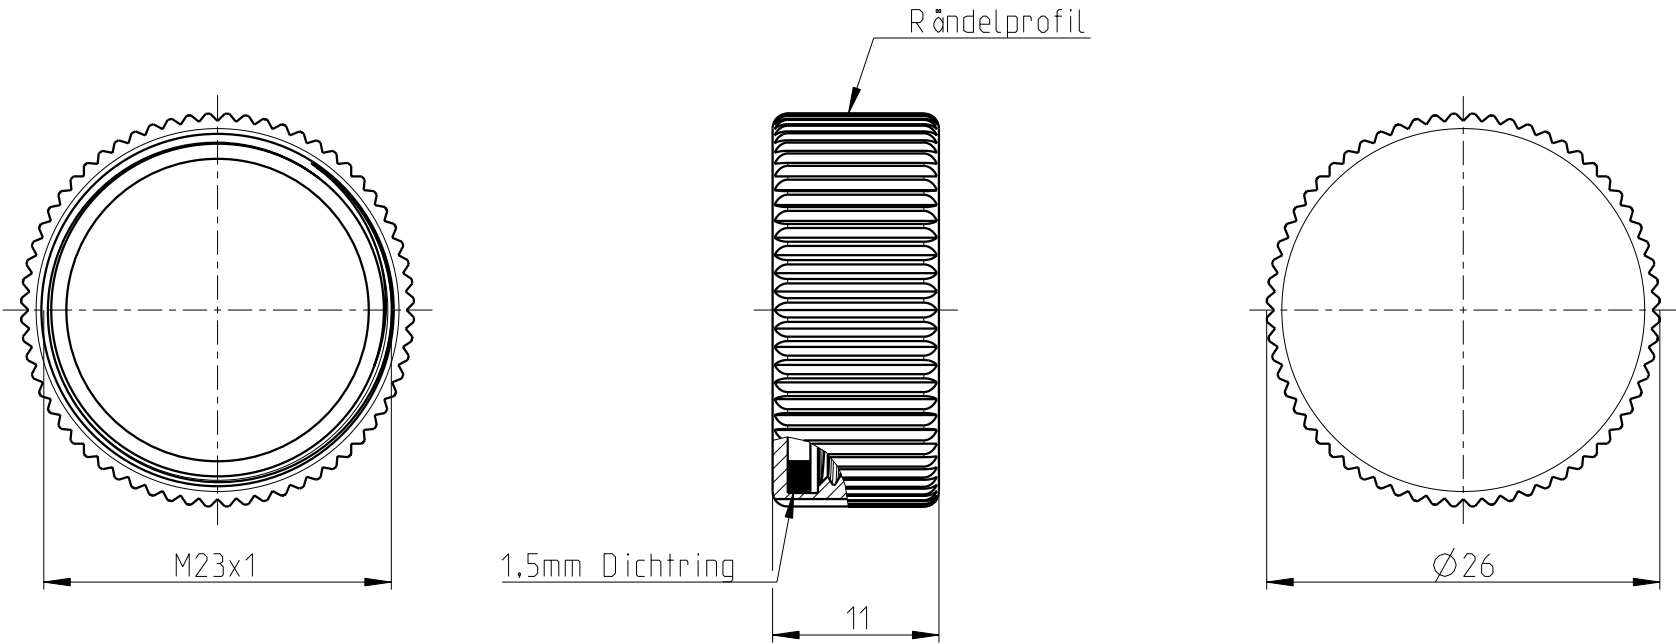

		Elektrische Daten									
		Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungskategorie			
		Bemessungsspannung						Aufstellhöhe			
Mechanische Daten		Bemessungsstoßspannung						Durchgangswiderstand			
Polzahl								Verschmutzungsgrad			
Kontaktanschlussart									Technische Änderung vorbehalten		Maßstab: 2:1
Kontakt-Ø											
Temperaturbereich		-40 °C / +110 °C							Benennung: Serie RC Metall-Staubschutzkappe für Geräte- und Kupplungssteckverbinder mit M23 Außengewinde		
Schutzart		IP 67, verriegelt									
Steckzyklen											
Material									Zeichnungsnummer: PP-Z2104		Blatt: 1 von: 2
Gehaeuse		CuZn / Ni									
Kontakttraeger/ISO											
Kontakte									Artikel-Nr.: 1665897		
Dichtungen		NBR									
		Ausgabe	Änderung	Datum	Name						

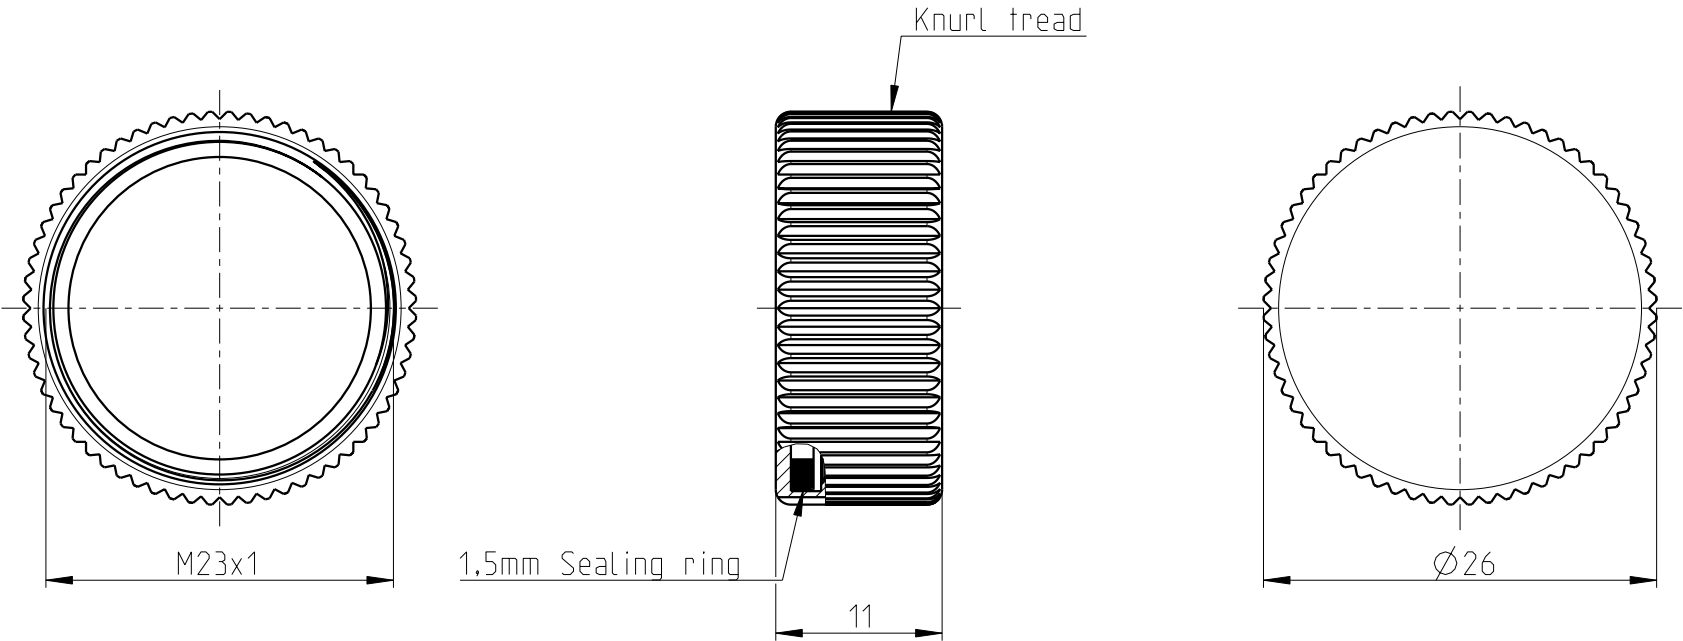

		Electrical Data															
Mechanical Data		Rated current at max. cross section								Surge voltage category							
										Installation height							
Number of pos./ Contact style		Rated voltage								Contact resistance							
Contact termination		Rated surge voltage								Degree of pollution							
Contact-Ø									technical changes reserved			scale: 2:1					
Temperature range		-40 °C / +110 °C															
Degree of protection		IP 67, when locked															
Mechanical insertion/withdrawal cycles						design	date	name	description: Series RC Metal protection cap for receptacles and cable connecting receptacles with M23 outside threading								
						chk.											
Material									drawing no.:			page: 2 of: 2					
Housing		CuZn / Ni							PP-Z2104								
Insulating body		see page 1															
Contacts		edition	changes	date	name				order-no.:								
Seal		NBR							1665897								