

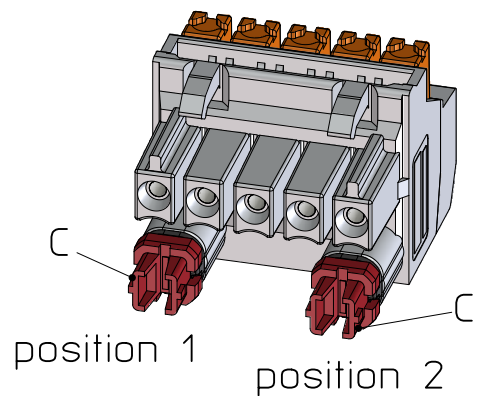





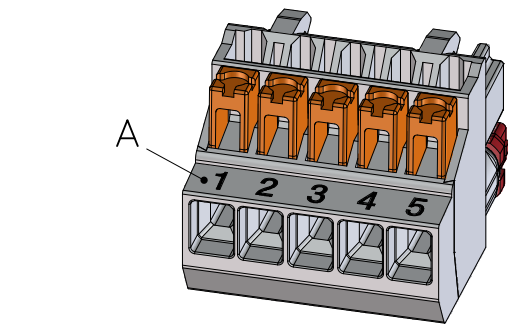


5:1

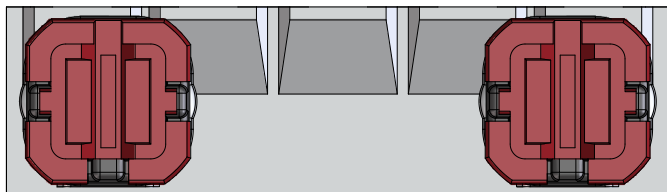


A
position 1

A
position 2

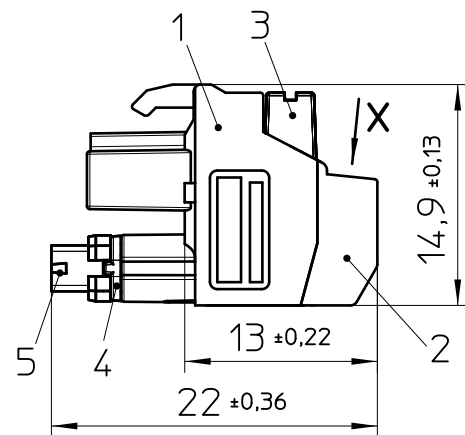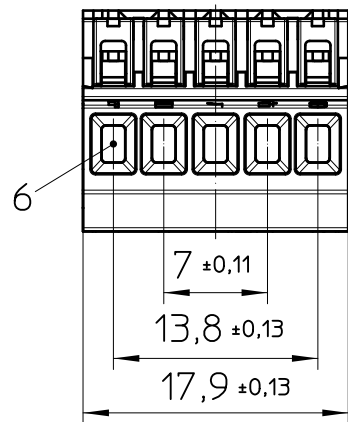

view X



Pos.	QTY	Description	Material
1	1	HOUSING	PA
2	1	COVER	PA
3	5	SPRING OPENER	PBT
4	2	CODING-PLUG	PA
5	2	CODING-HEADER	PA
6	5	PUSH-IN-CONTACT	Cu alloy, STL

General Information:


- Corresponding header ICC25-H/5L/R3,5
- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Web: www.phoenixcontact.com

Additional Information:


- A. Marking area
- Printing method: pad printing
 - Printing color: black similar RAL9005
- B. Contact type

schematic symbol	description	electrical symbol
	single contact	
	without contact	


C) Coding adjustment with screwdriver
e.g. 1205037 - SZS 0,4X2,5 VDE




A



B



C



D

Example: ICC25-PPC1,5/5-3,5- CB

position 1

position 2



DIN A3



page 1 of 1

document-no. / ri		article-no.		scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
01773597 / 01		1813773		2:1	
date	document-type				
17.02.2025	TECDOC 2D_Productdrawing				
description					
ICC25-PPC1,5/5-3,5-AA-7035 TP1-5					