


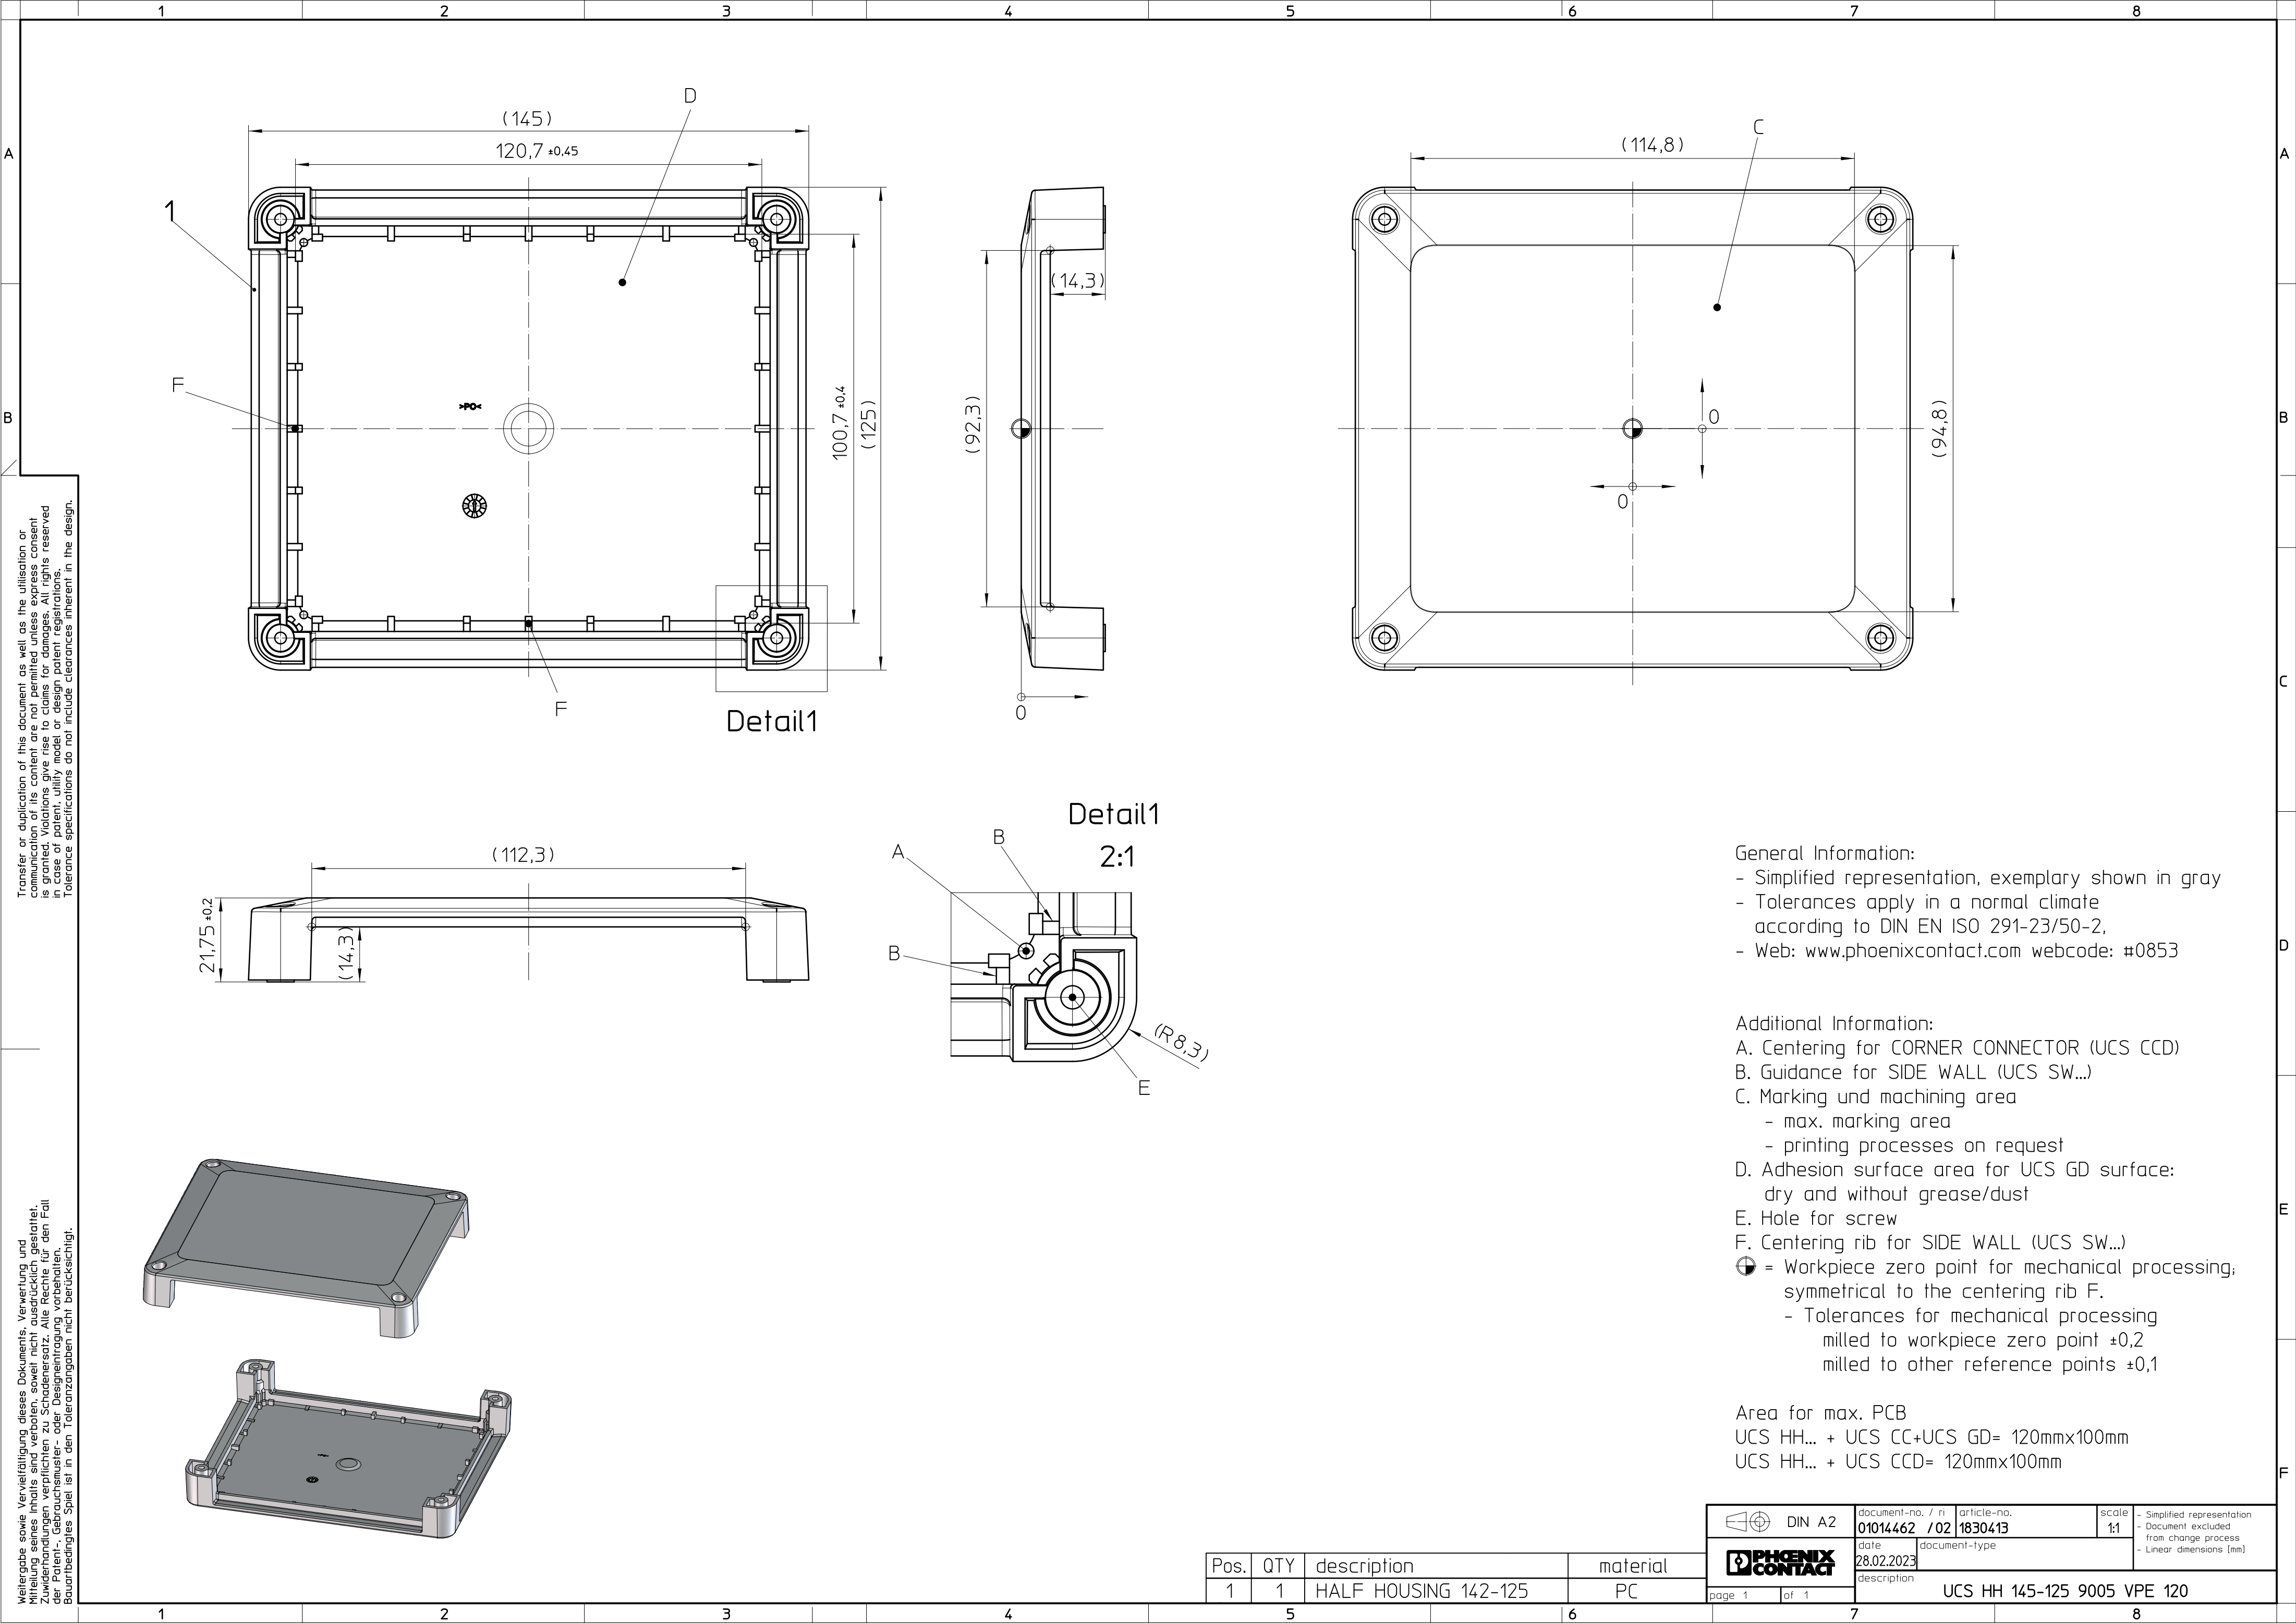

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

General Information:

- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2,
- Web: www.phoenixcontact.com webcode: #0853

Additional Information:

- A. Centering for CORNER CONNECTOR (UCS CCD)
- B. Guidance for SIDE WALL (UCS SW...)
- C. Marking und machining area
 - max. marking area
 - printing processes on request
- D. Adhesion surface area for UCS GD surface:
 - dry and without grease/dust
- E. Hole for screw
- F. Centering rib for SIDE WALL (UCS SW...)

☉ = Workpiece zero point for mechanical processing, symmetrical to the centering rib F.

- Tolerances for mechanical processing
 - milled to workpiece zero point ±0,2
 - milled to other reference points ±0,1

Area for max. PCB

UCS HH... + UCS CC+UCS GD= 120mmx100mm

UCS HH... + UCS CCD= 120mmx100mm

Pos.	QTY	description	material
1	1	HALF HOUSING 142-125	PC

document-no. / ri	article-no.	scale	- Simplified representation
01014462 / 02	1830413	1:1	- Document excluded from change process
date	document-type		- Linear dimensions [mm]
28.02.2023			
description	UCS HH 145-125 9005 VPE 120		

page 1	of 1
--------	------