

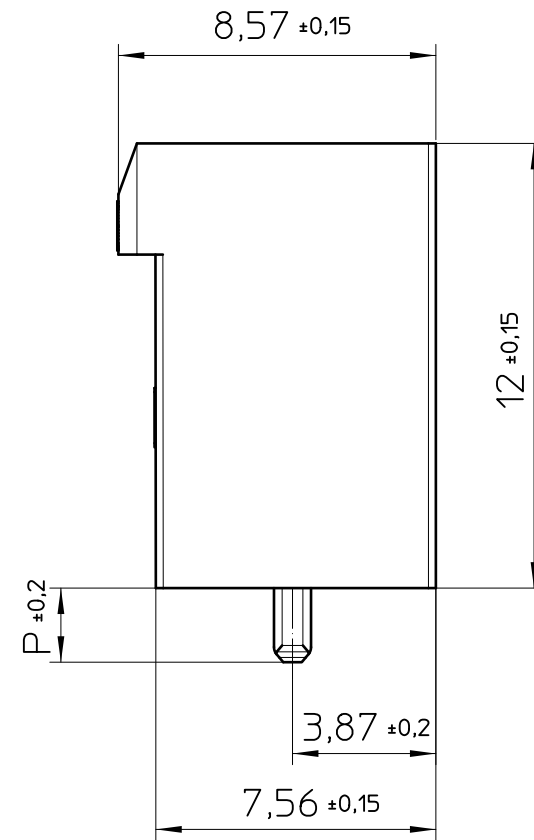


even number of pins


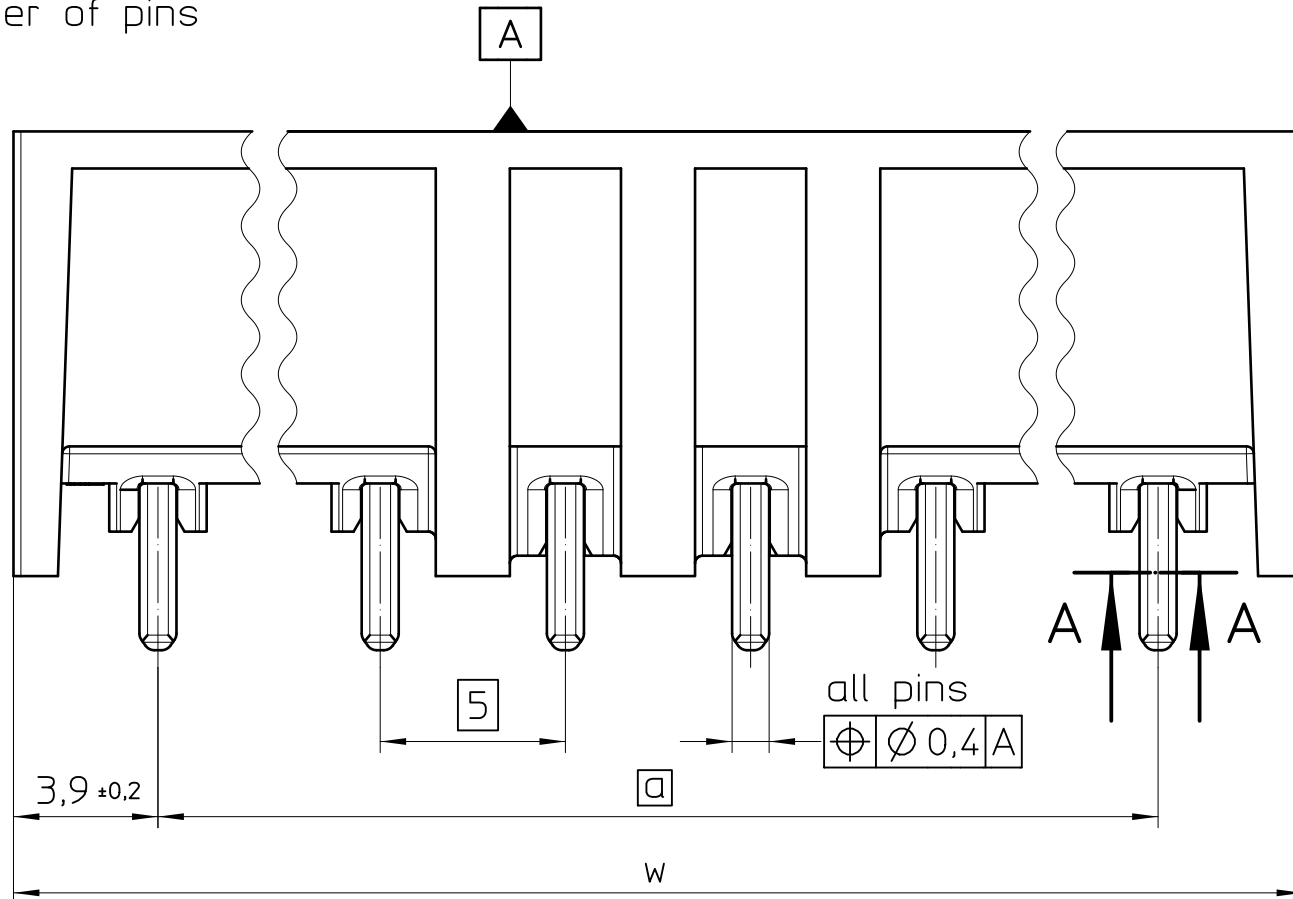


pos.	dim. a	dim. w
13	60,00	67,80 ±0,25
14	65,00	72,80 ±0,25
15	70,00	77,80 ±0,25
16	75,00	82,80 ±0,40
17	80,00	87,80 ±0,40
18	85,00	92,80 ±0,40
19	90,00	97,80 ±0,40
20	95,00	102,80 ±0,40
21	100,00	107,80 ±0,40
22	105,00	112,80 ±0,40
23	110,00	117,80 ±0,40
24	115,00	122,80 ±0,50


position 1

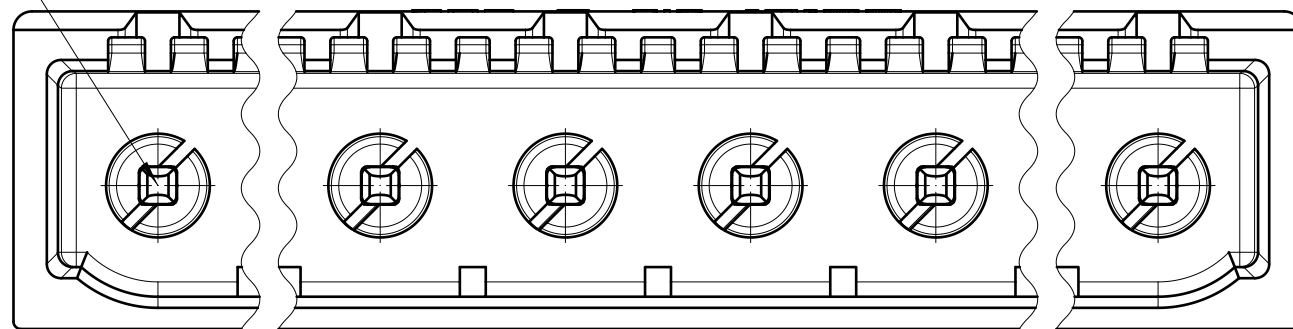

A-A
10:1

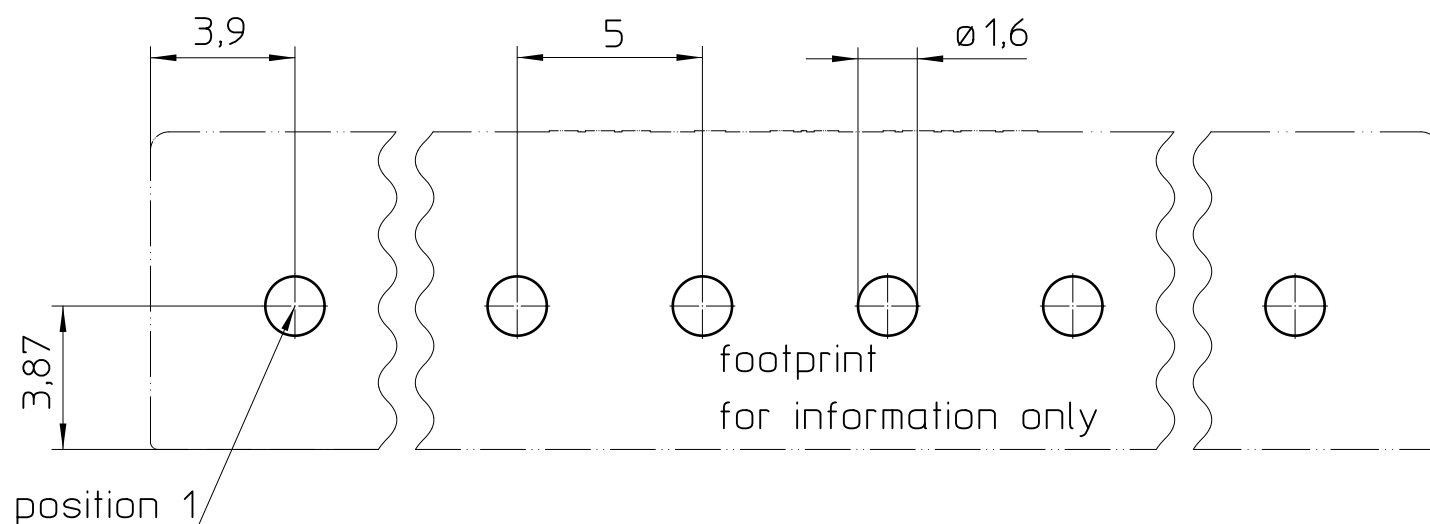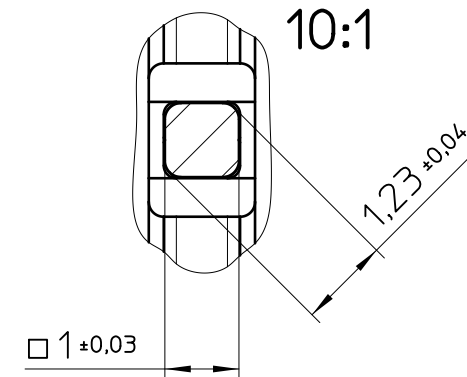

odd number of pins (2:1)

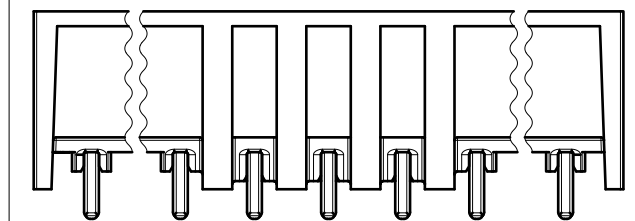

 DIN A3		document-No. / RI	date	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm] - EN ISO 291 23/50
		01024540 / 02	28.09.2017	5:1	
		document-type			
		TECDOC 2D_Productfamily			
		description			CCVA 2,5/13-24-G-5,0-THR
page 1	of 1				