
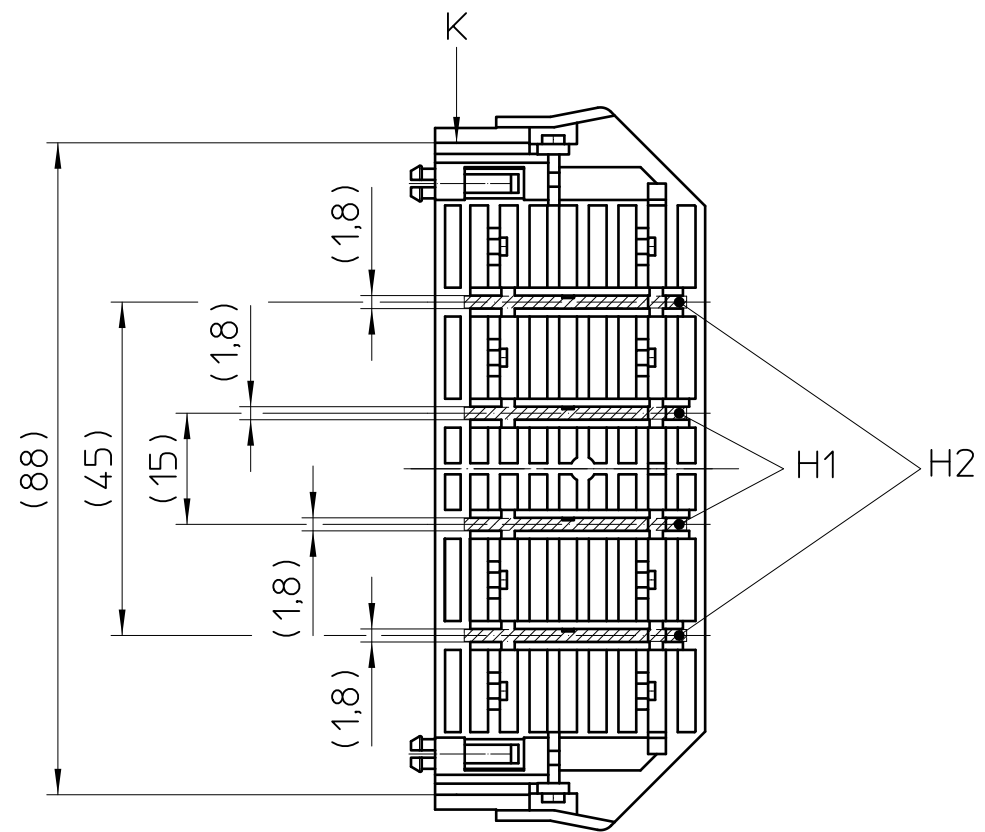
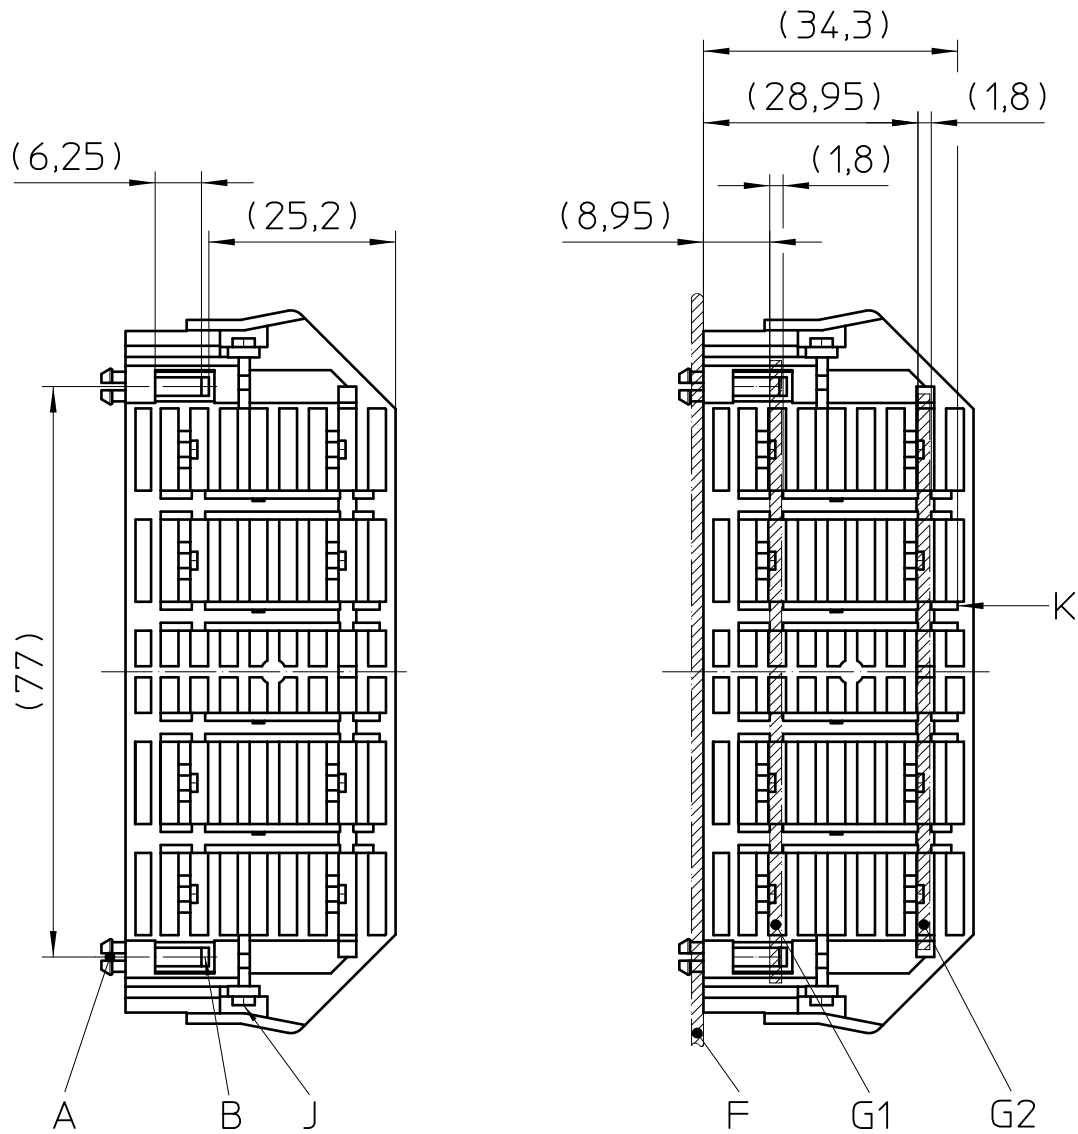


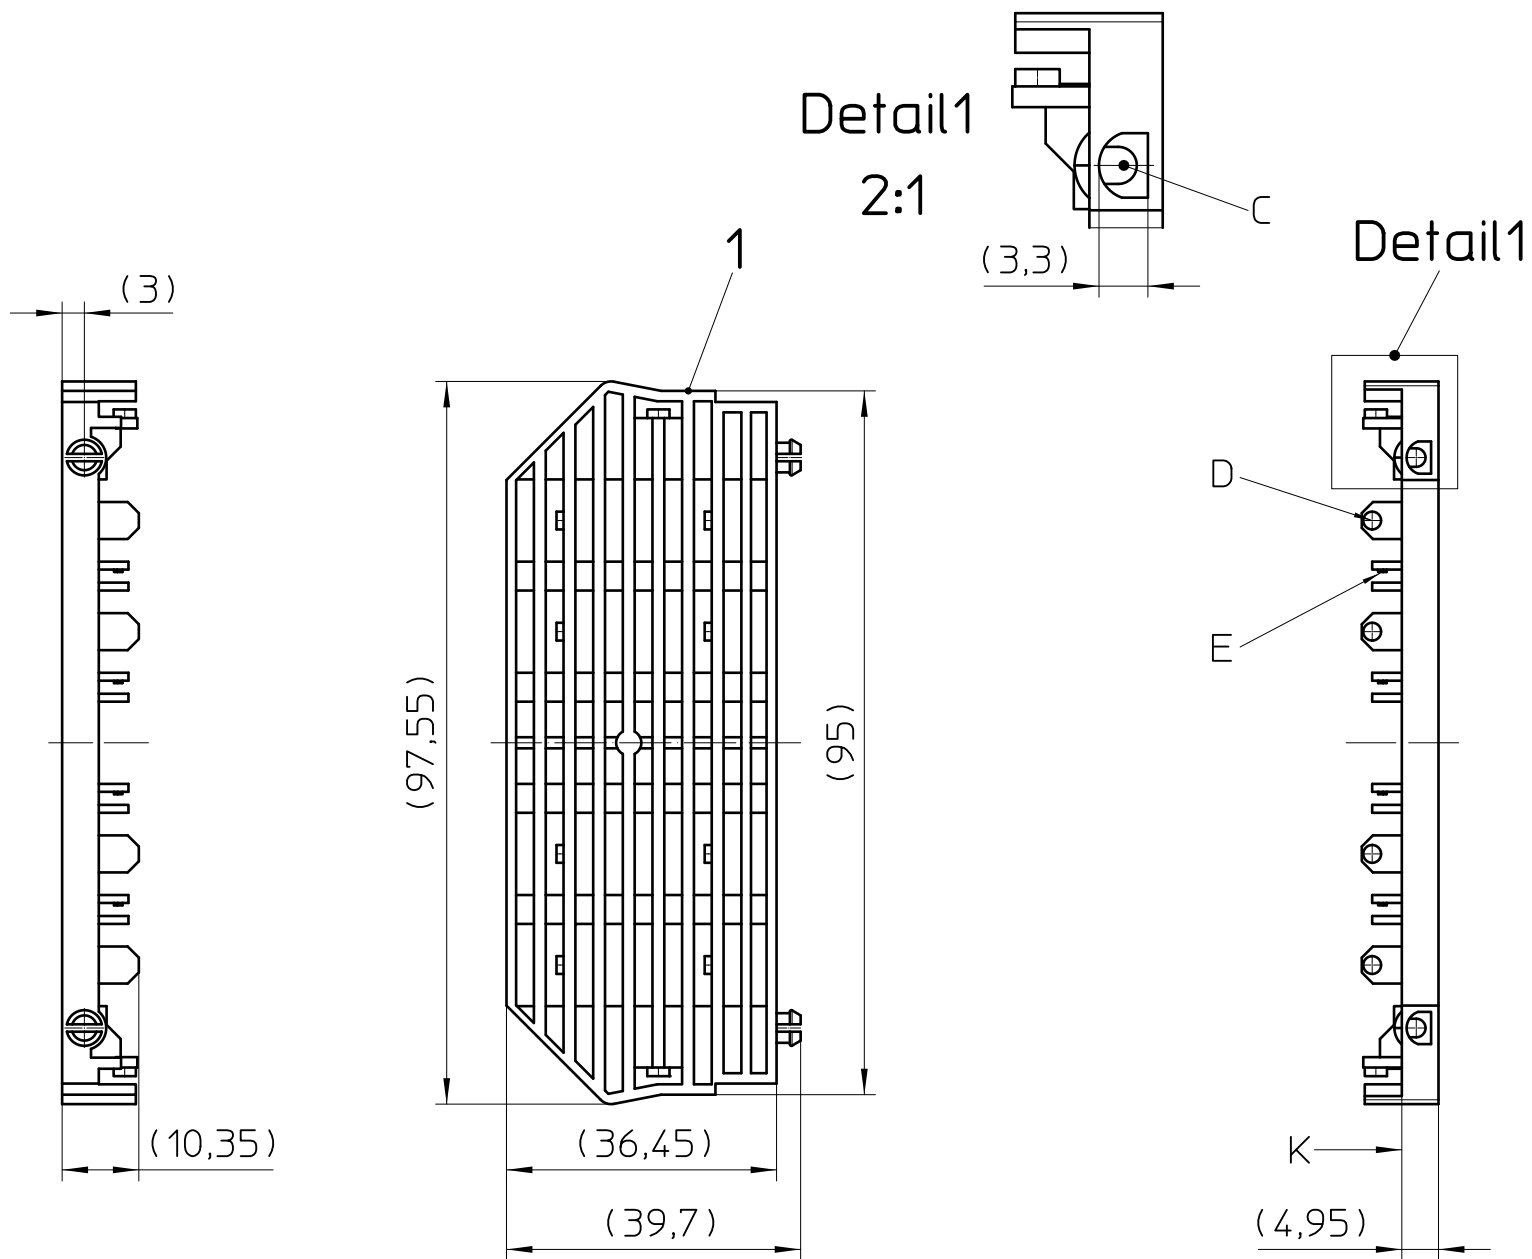

General Information

- Simplified representation
- Document excluded from change process
- Linear dimensions [mm]
- Tolerances, apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Web: www.phoenixcontact.com webcode: #0313 / #0314

Additional Information:

A. Fixing point for PCB LID-92
Recommended PCB hole: $\phi 4 \pm 0,05$

B. Locking element for A

C. Slot to actuate the locking element
Recommended tool: pin $\phi 3$

D. Fixing point for PCB LID 92 horizontal ...

E. Fixing point for PCB LID 92 vertical ...

F. PCB LID-92 ($t=1,6 \pm 0,2$)

G1. PCB LID-92 horizontal 1 ($t=1,6 \pm 0,2$)

G2. PCB LID-92 horizontal 2 ($t=1,6 \pm 0,2$)

H1. PCB LID-92 vertical 1 ($t=1,6 \pm 0,2$)

H2. PCB LID-92 vertical 2 ($t=1,6 \pm 0,2$)



I. UM-...A/U 92 (U-shaped profile cover)

J. Fixing point for UM-...A/U 92

K. Bearing surface for UM-... A/U 92

Recommended PCB-outline see further documentation

Assembly examples: Side element with Cover and PCBs

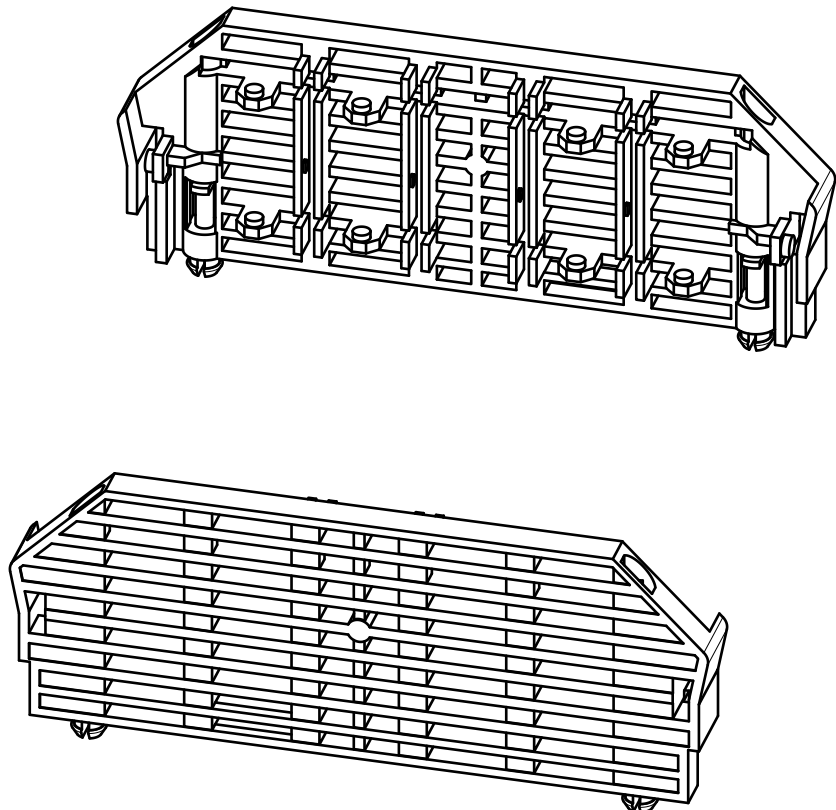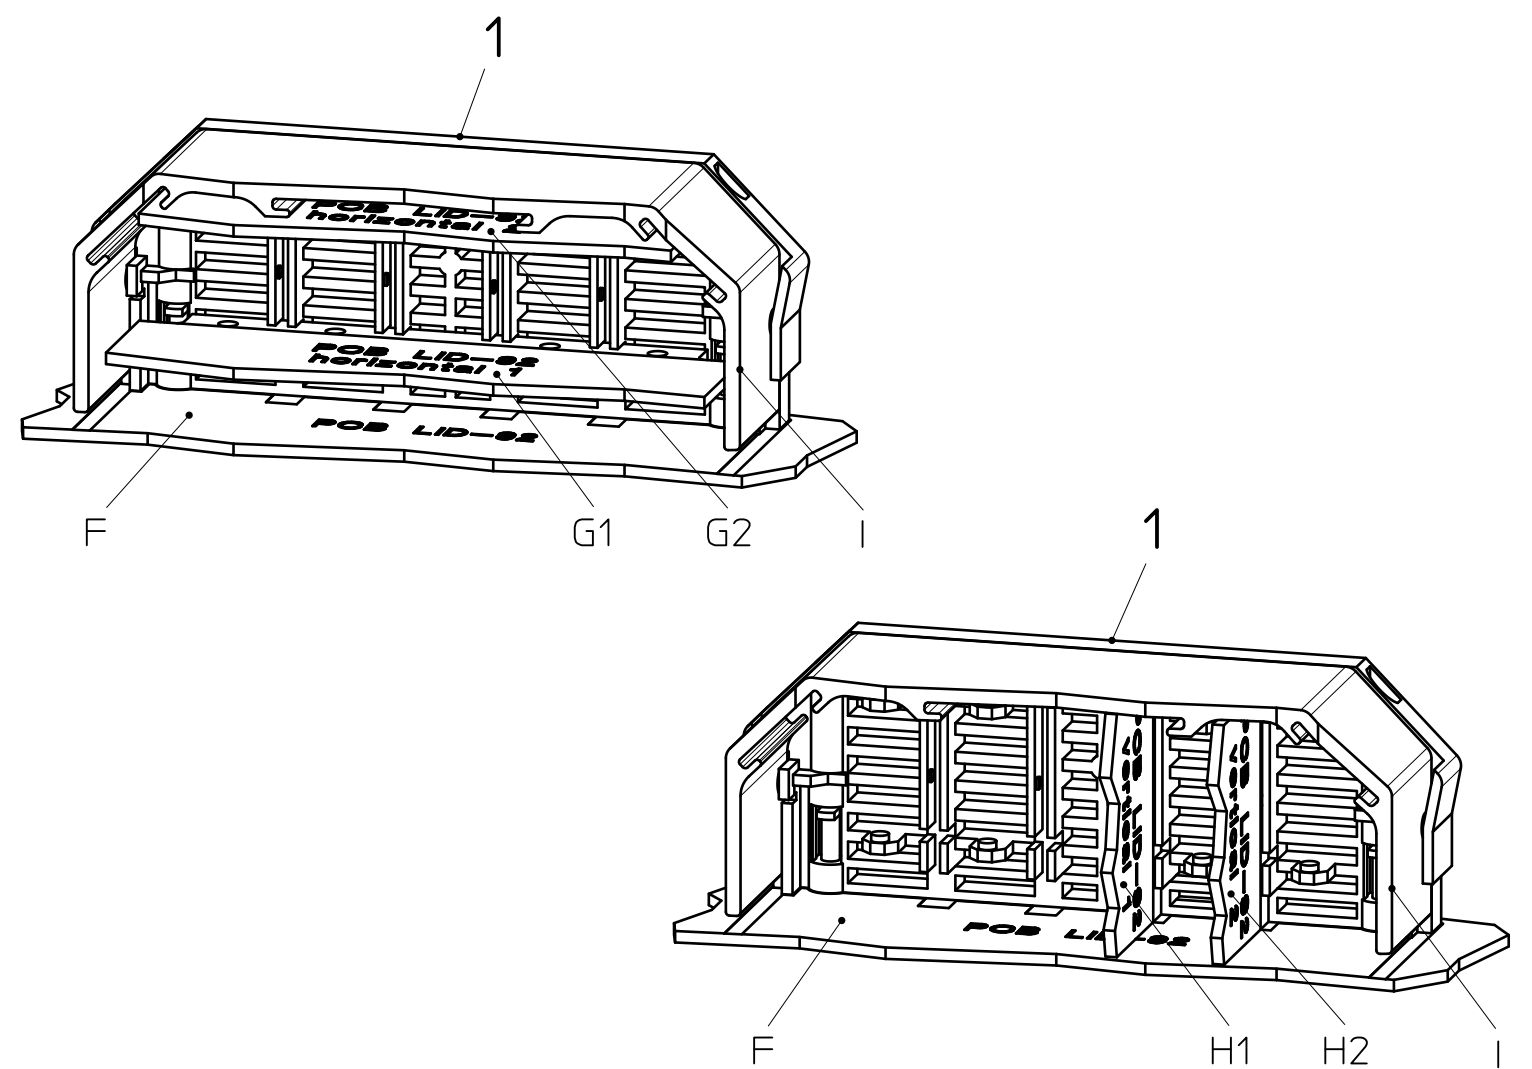

Pos.	QTY	description		material	
1	1	SIDE ELEMENT		PA	
		document-No. / RI 01094258 / 02		date 22.05.2025	scale 1:1
		ident.-No. 2200172	document-type TECDOC 2D_Productdrawing		
page 1		of 1		UM-PRO LID-92 BK	