


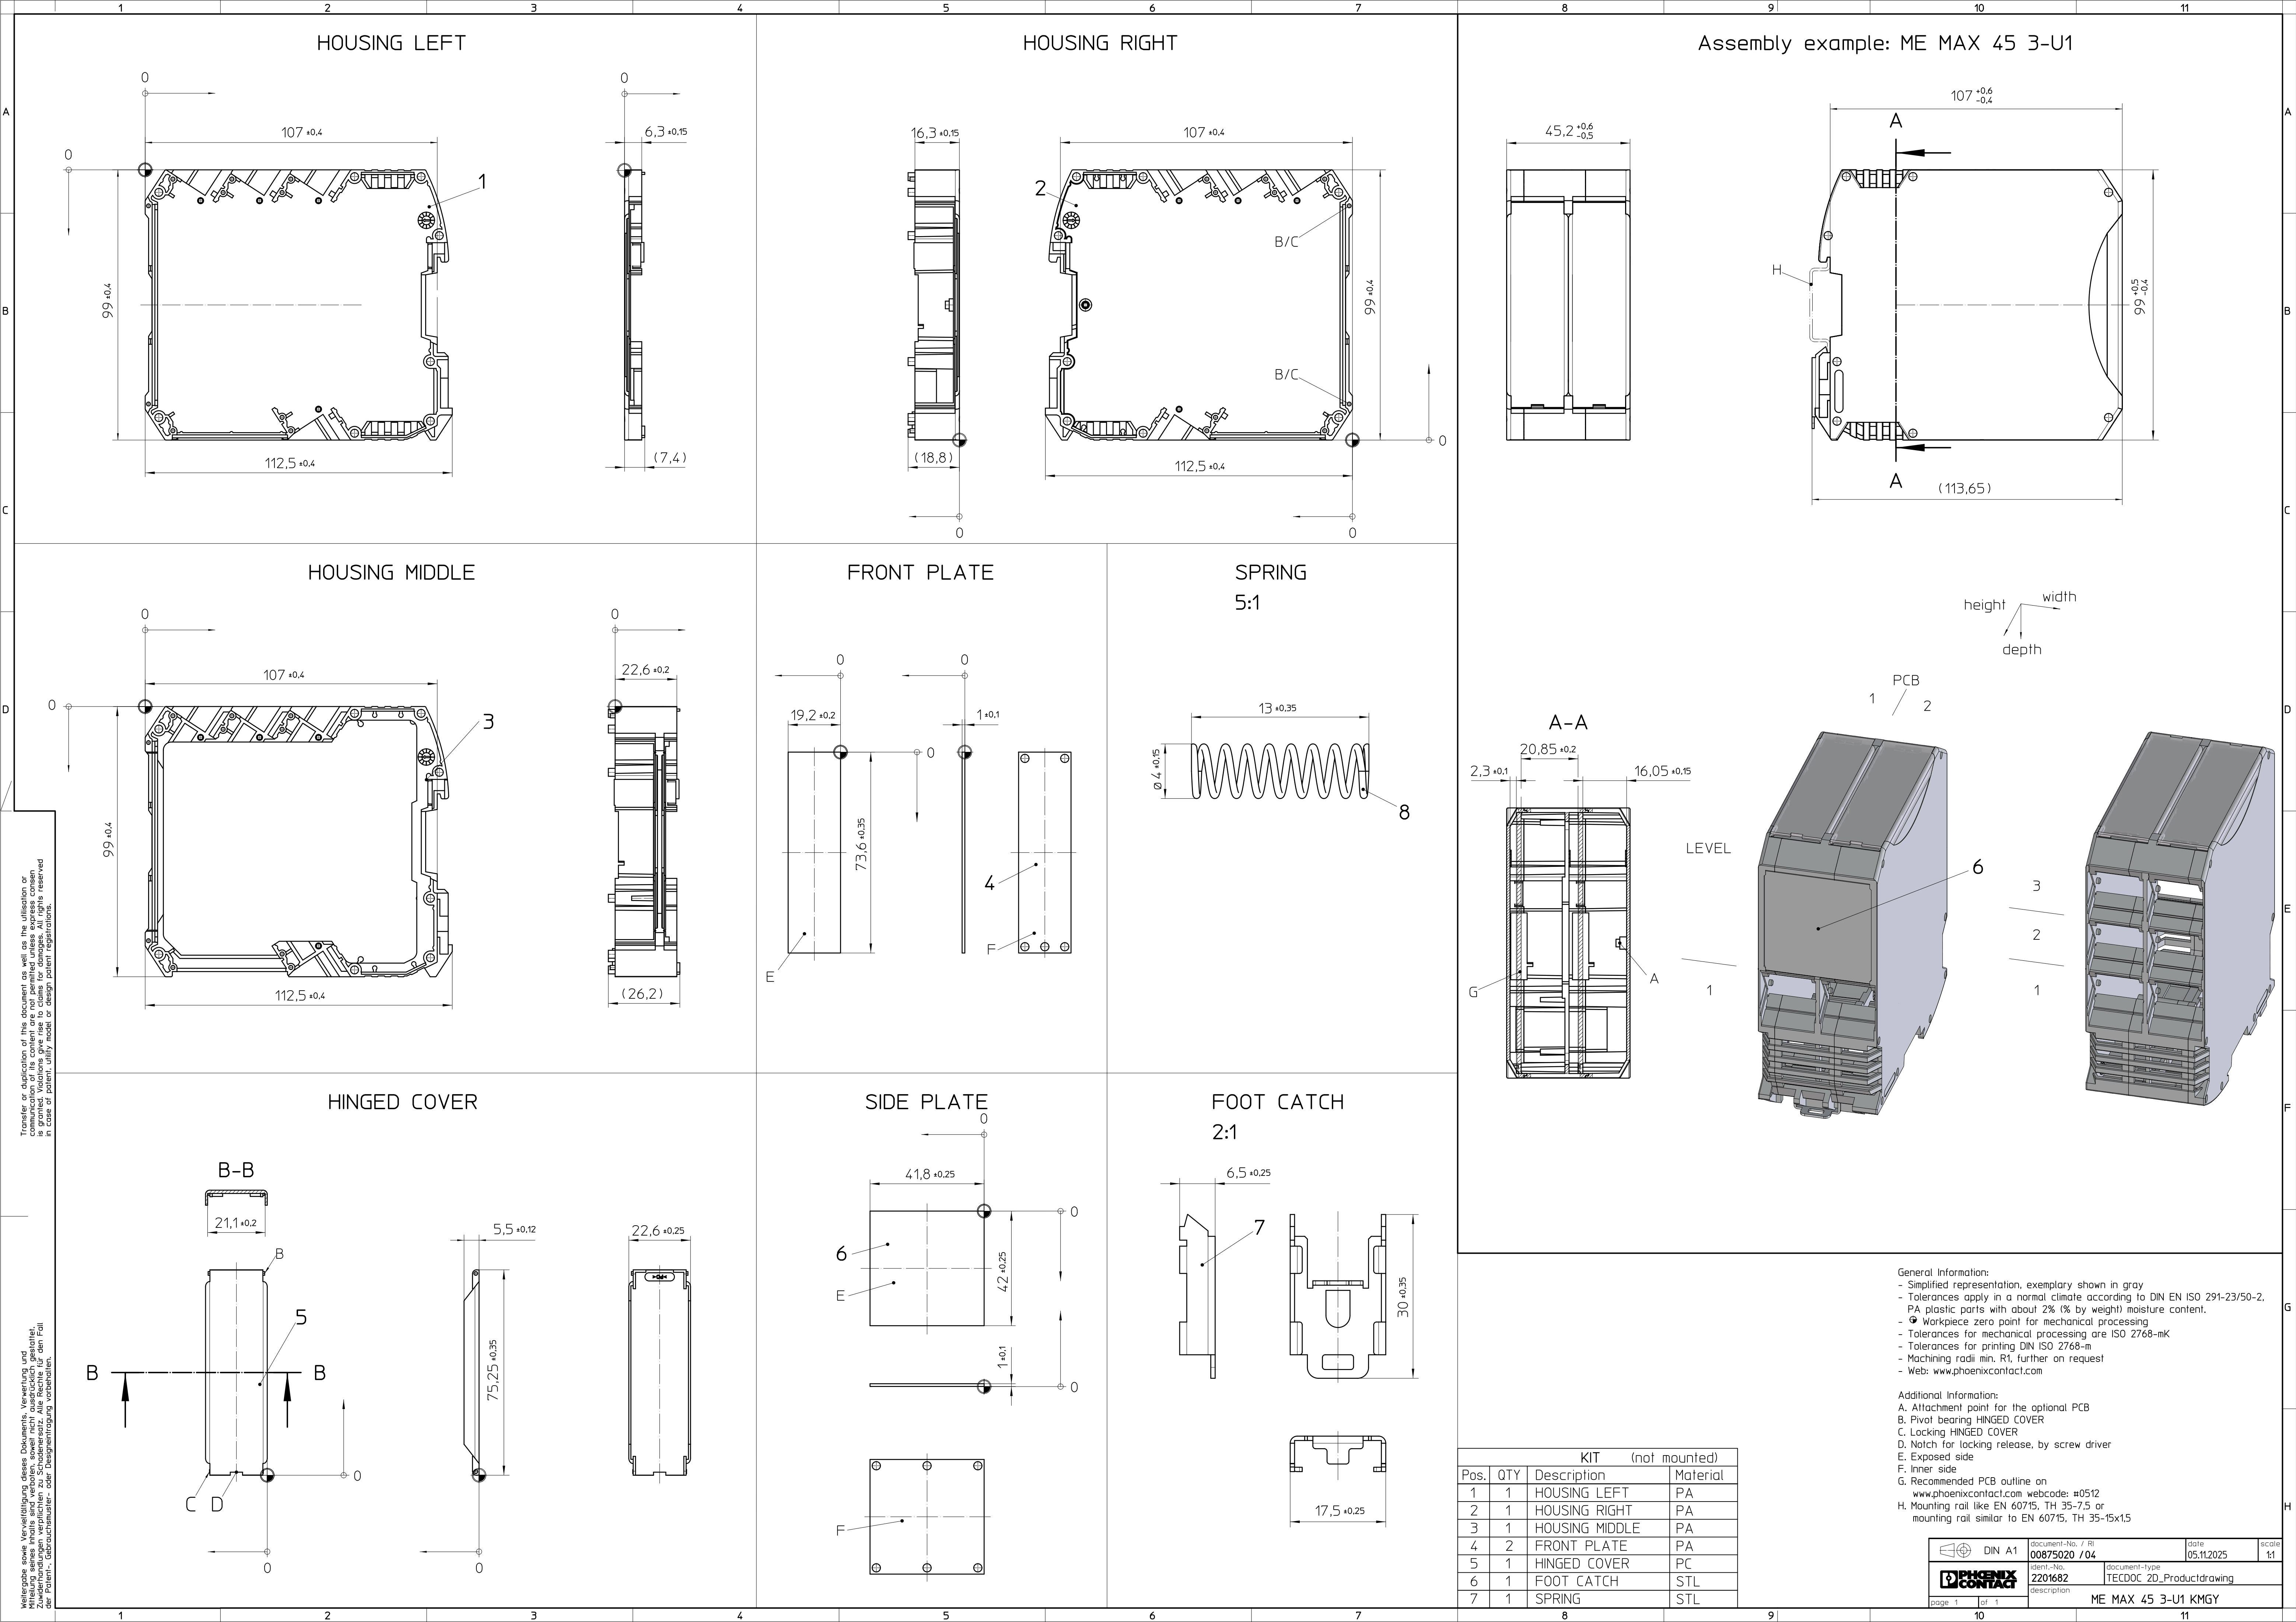

General Information:

- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2.
- PA plastic parts with about 2% (% by weight) moisture content.
- Workpiece zero point for mechanical processing
- Tolerances for mechanical processing are ISO 2768-mk
- Tolerances for printing DIN ISO 2768-m
- Machining radii min. R1, further on request
- Web: [www.phoenixcontact.com](http://www.phoenixcontact.com)

Additional Information:

A. Attachment point for the optional PCB

B. Pivot bearing HINGED COVER

C. Locking HINGED COVER

D. Notch for locking release, by screw driver

E. Exposed side

F. Inner side

G. Recommended PCB outline on [www.phoenixcontact.com](http://www.phoenixcontact.com) webcode: #0512

H. Mounting rail like EN 60715, TH 35-7.5 or mounting rail similar to EN 60715, TH 35-15x15

| KIT (not mounted) |     |                |          |
|-------------------|-----|----------------|----------|
| Pos.              | QTY | Description    | Material |
| 1                 | 1   | HOUSING LEFT   | PA       |
| 2                 | 1   | HOUSING RIGHT  | PA       |
| 3                 | 1   | HOUSING MIDDLE | PA       |
| 4                 | 2   | FRONT PLATE    | PA       |
| 5                 | 1   | HINGED COVER   | PC       |
| 6                 | 1   | FOOT CATCH     | STL      |
| 7                 | 1   | SPRING         | STL      |