
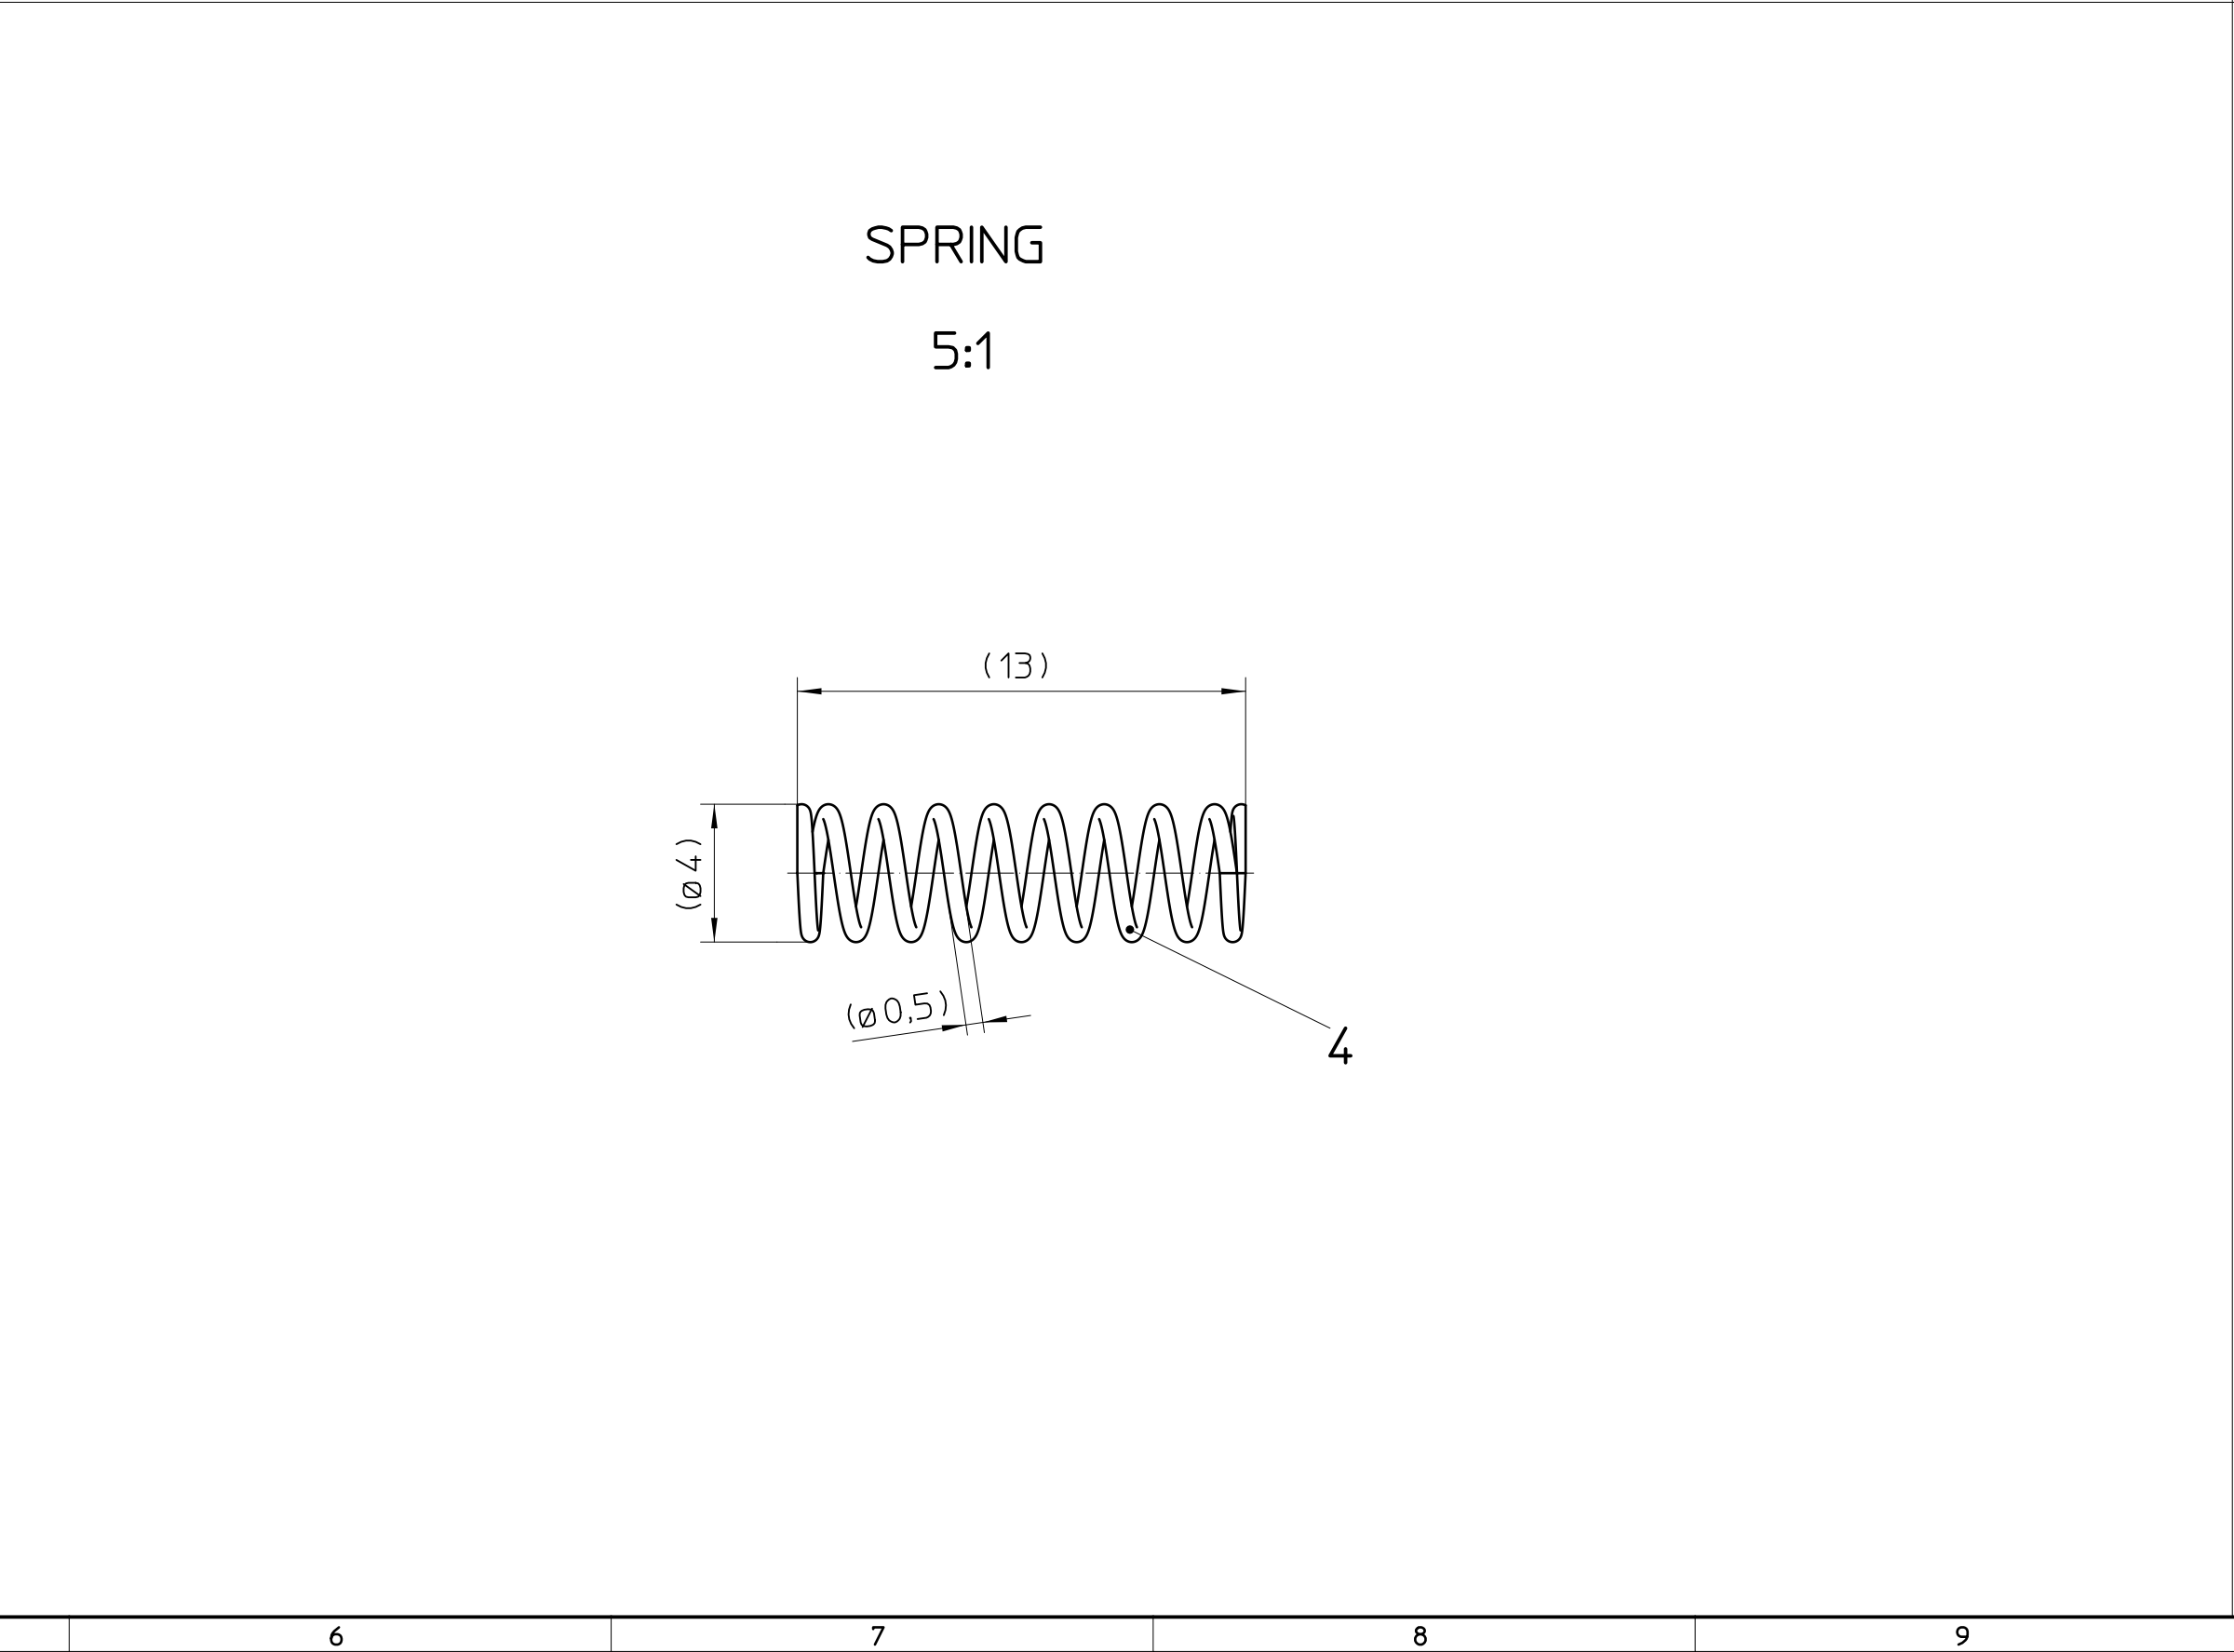
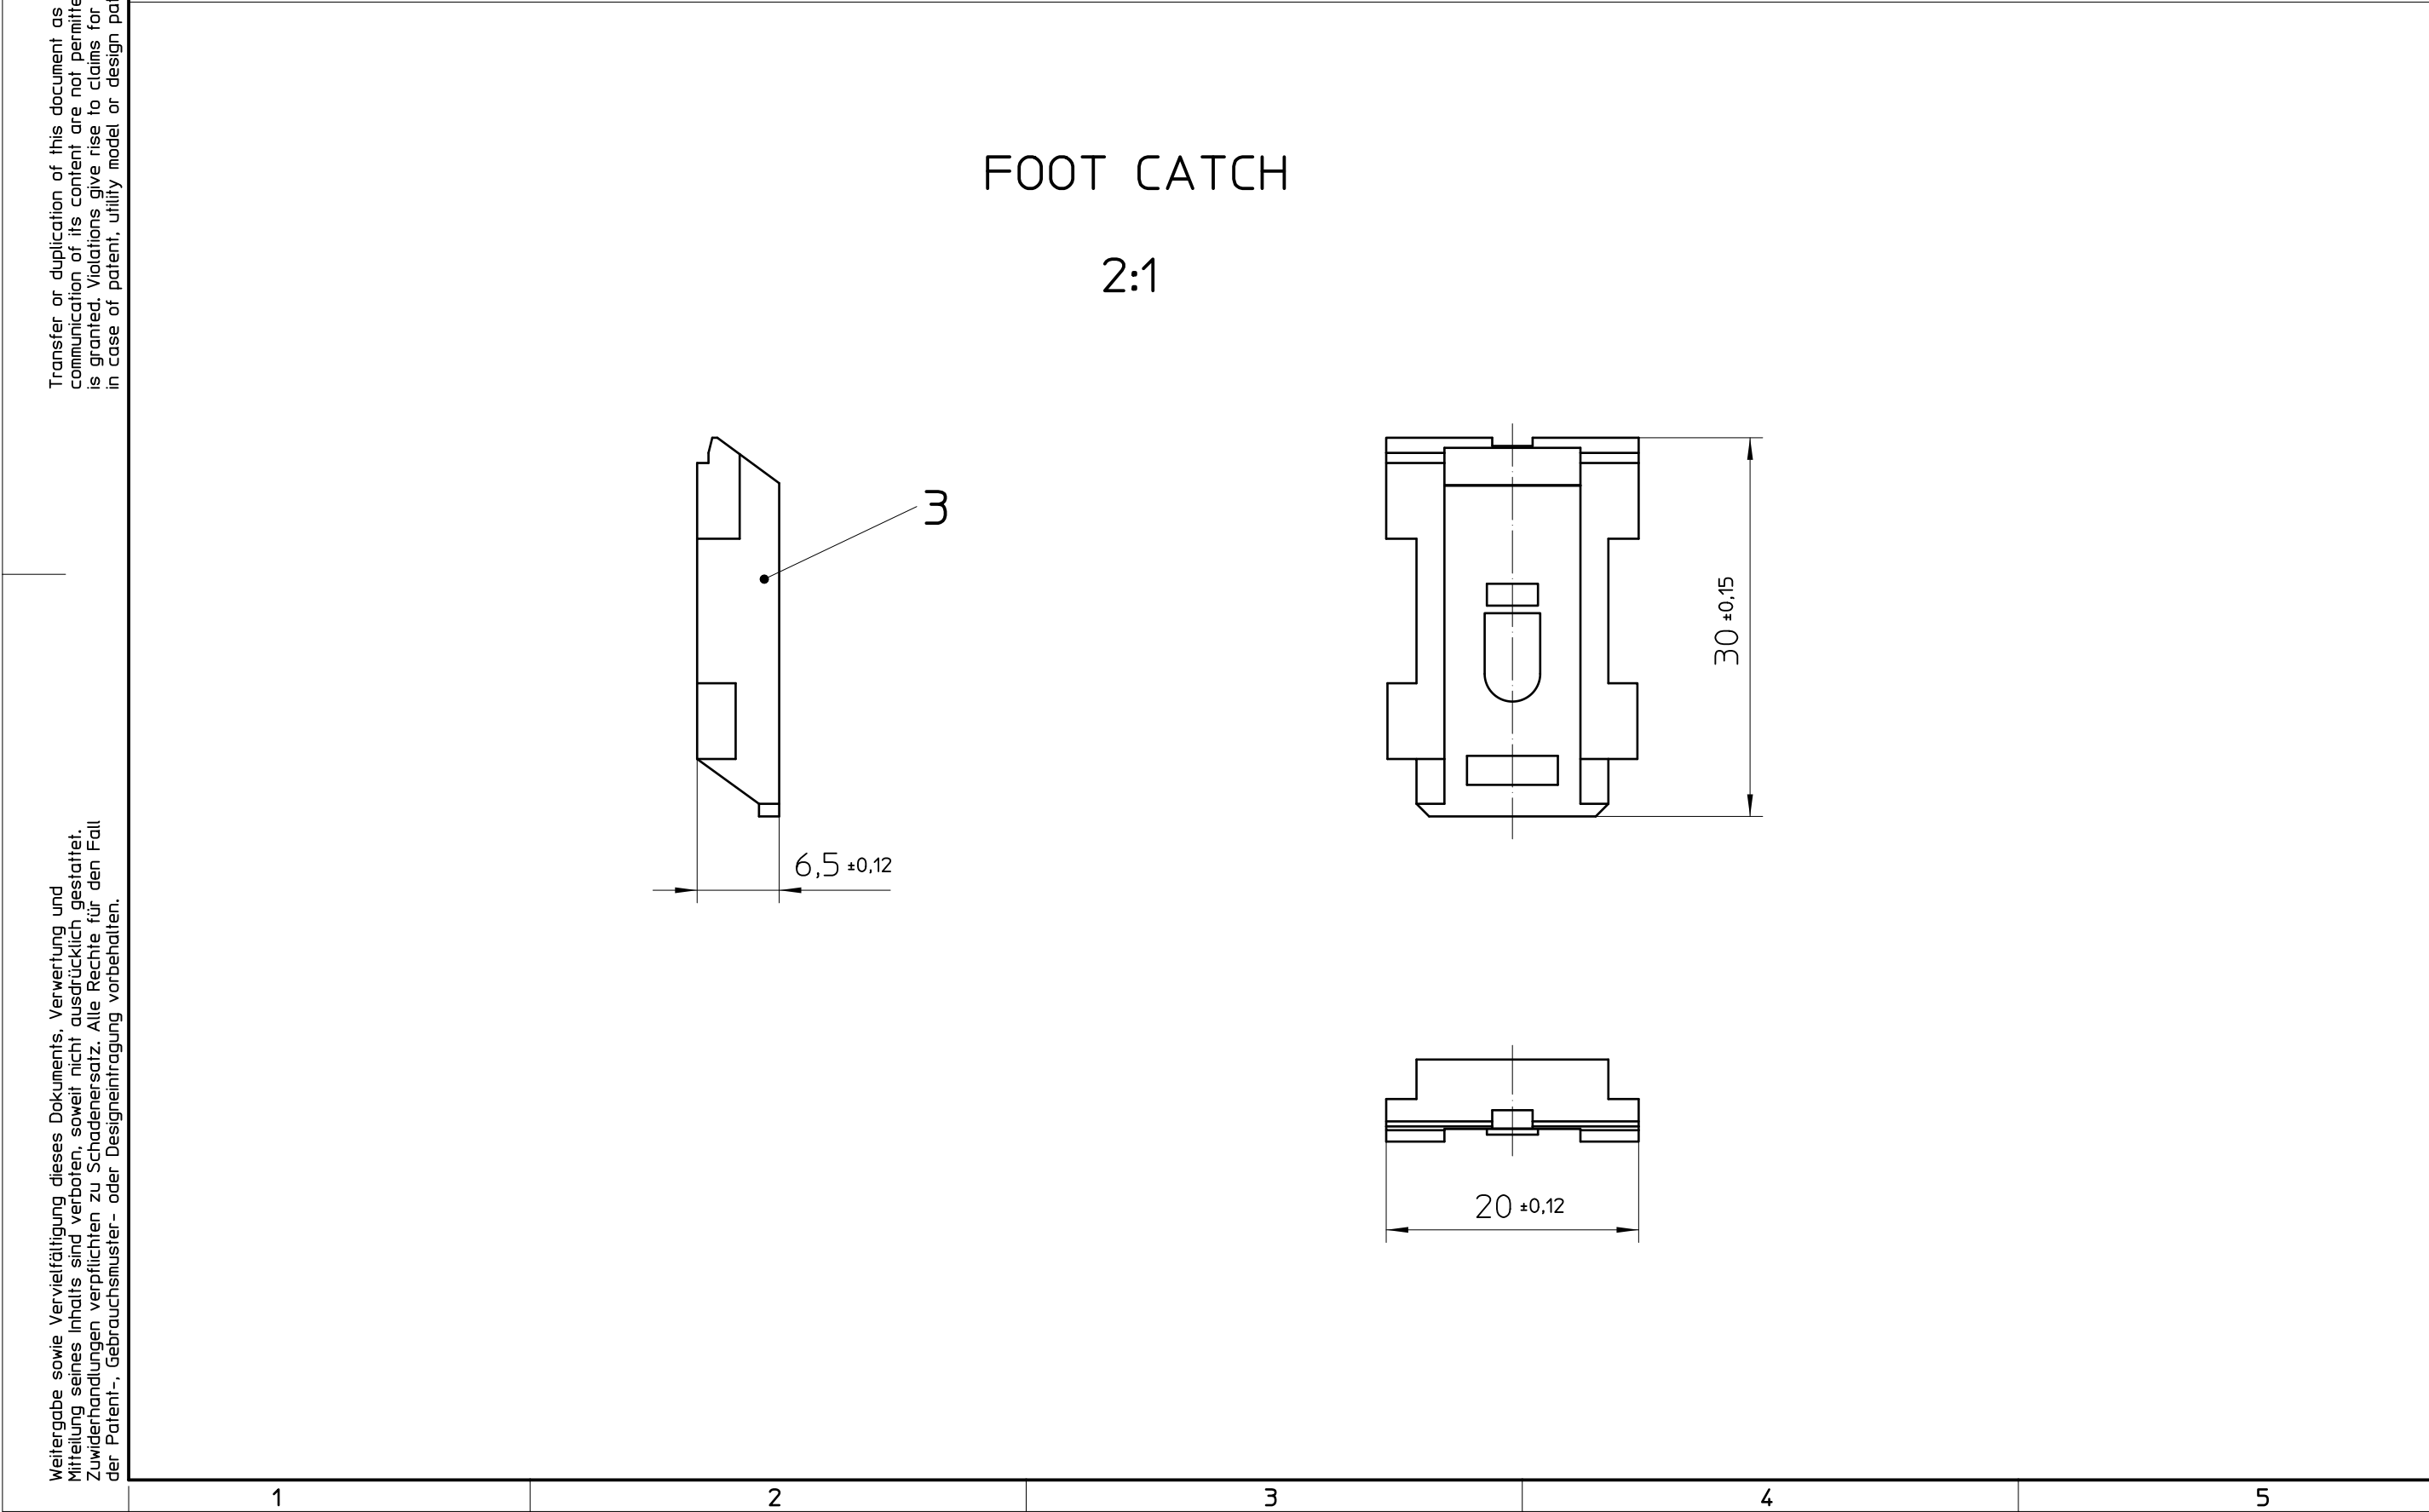
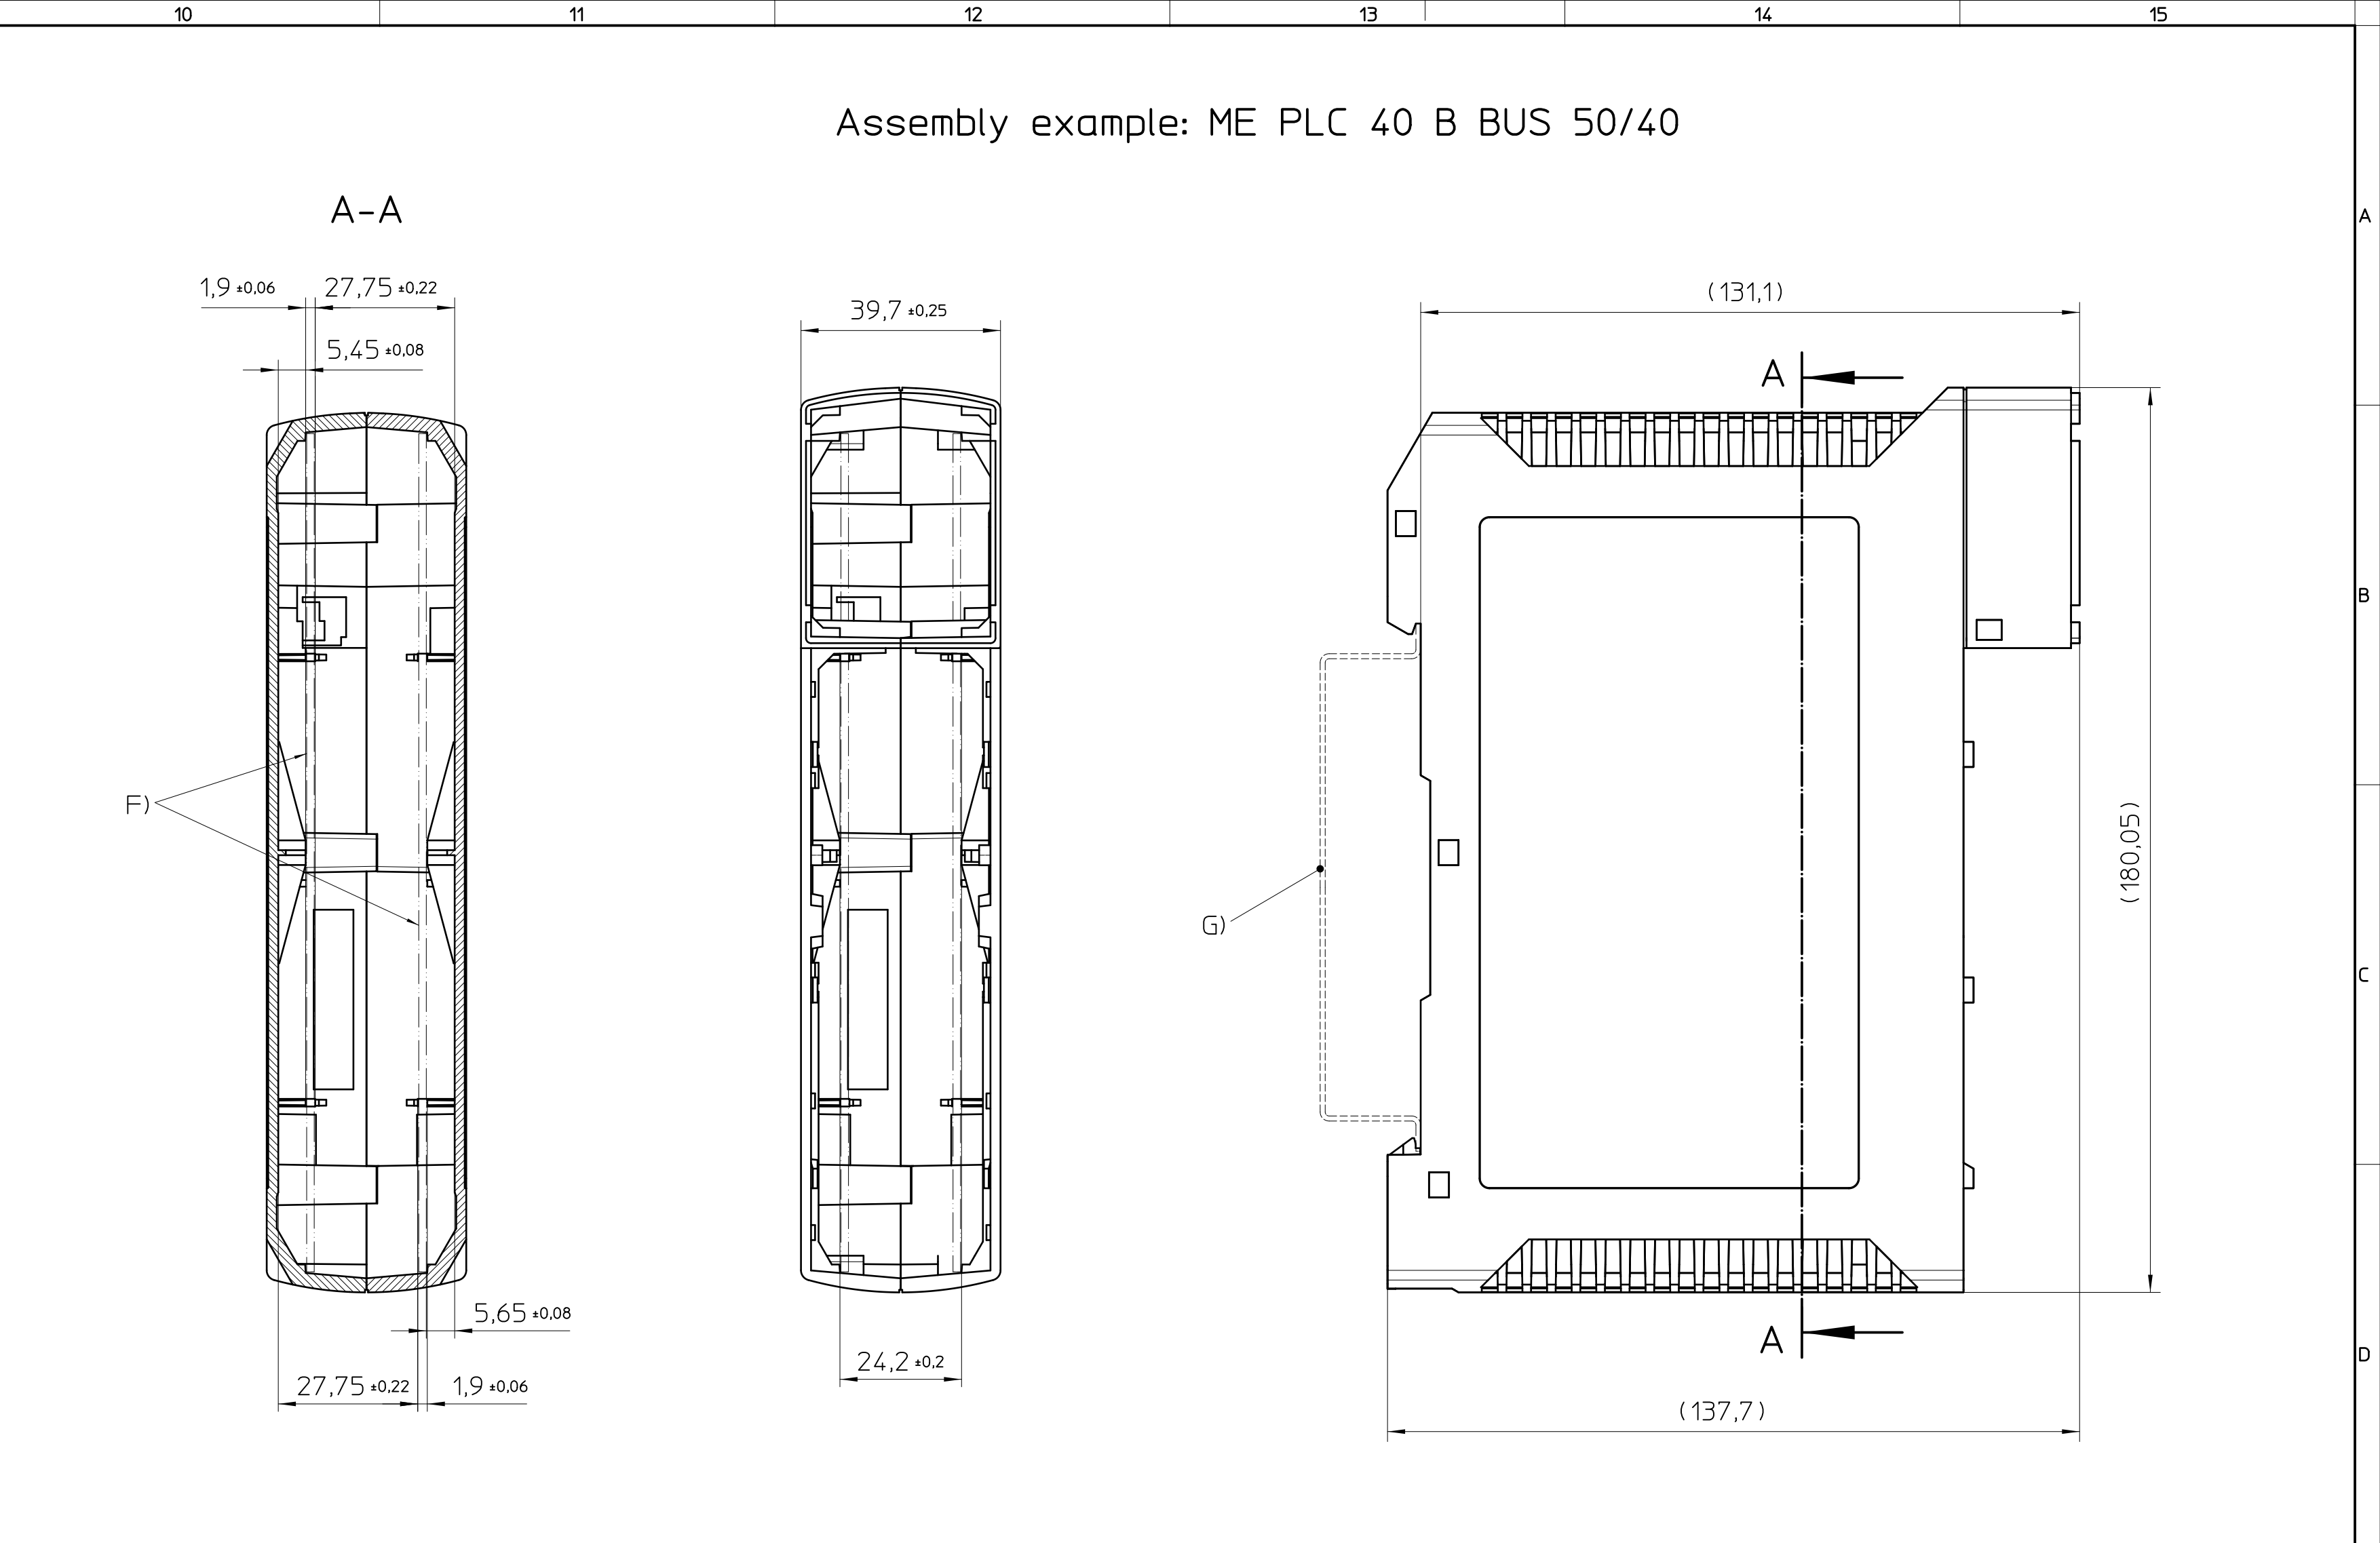
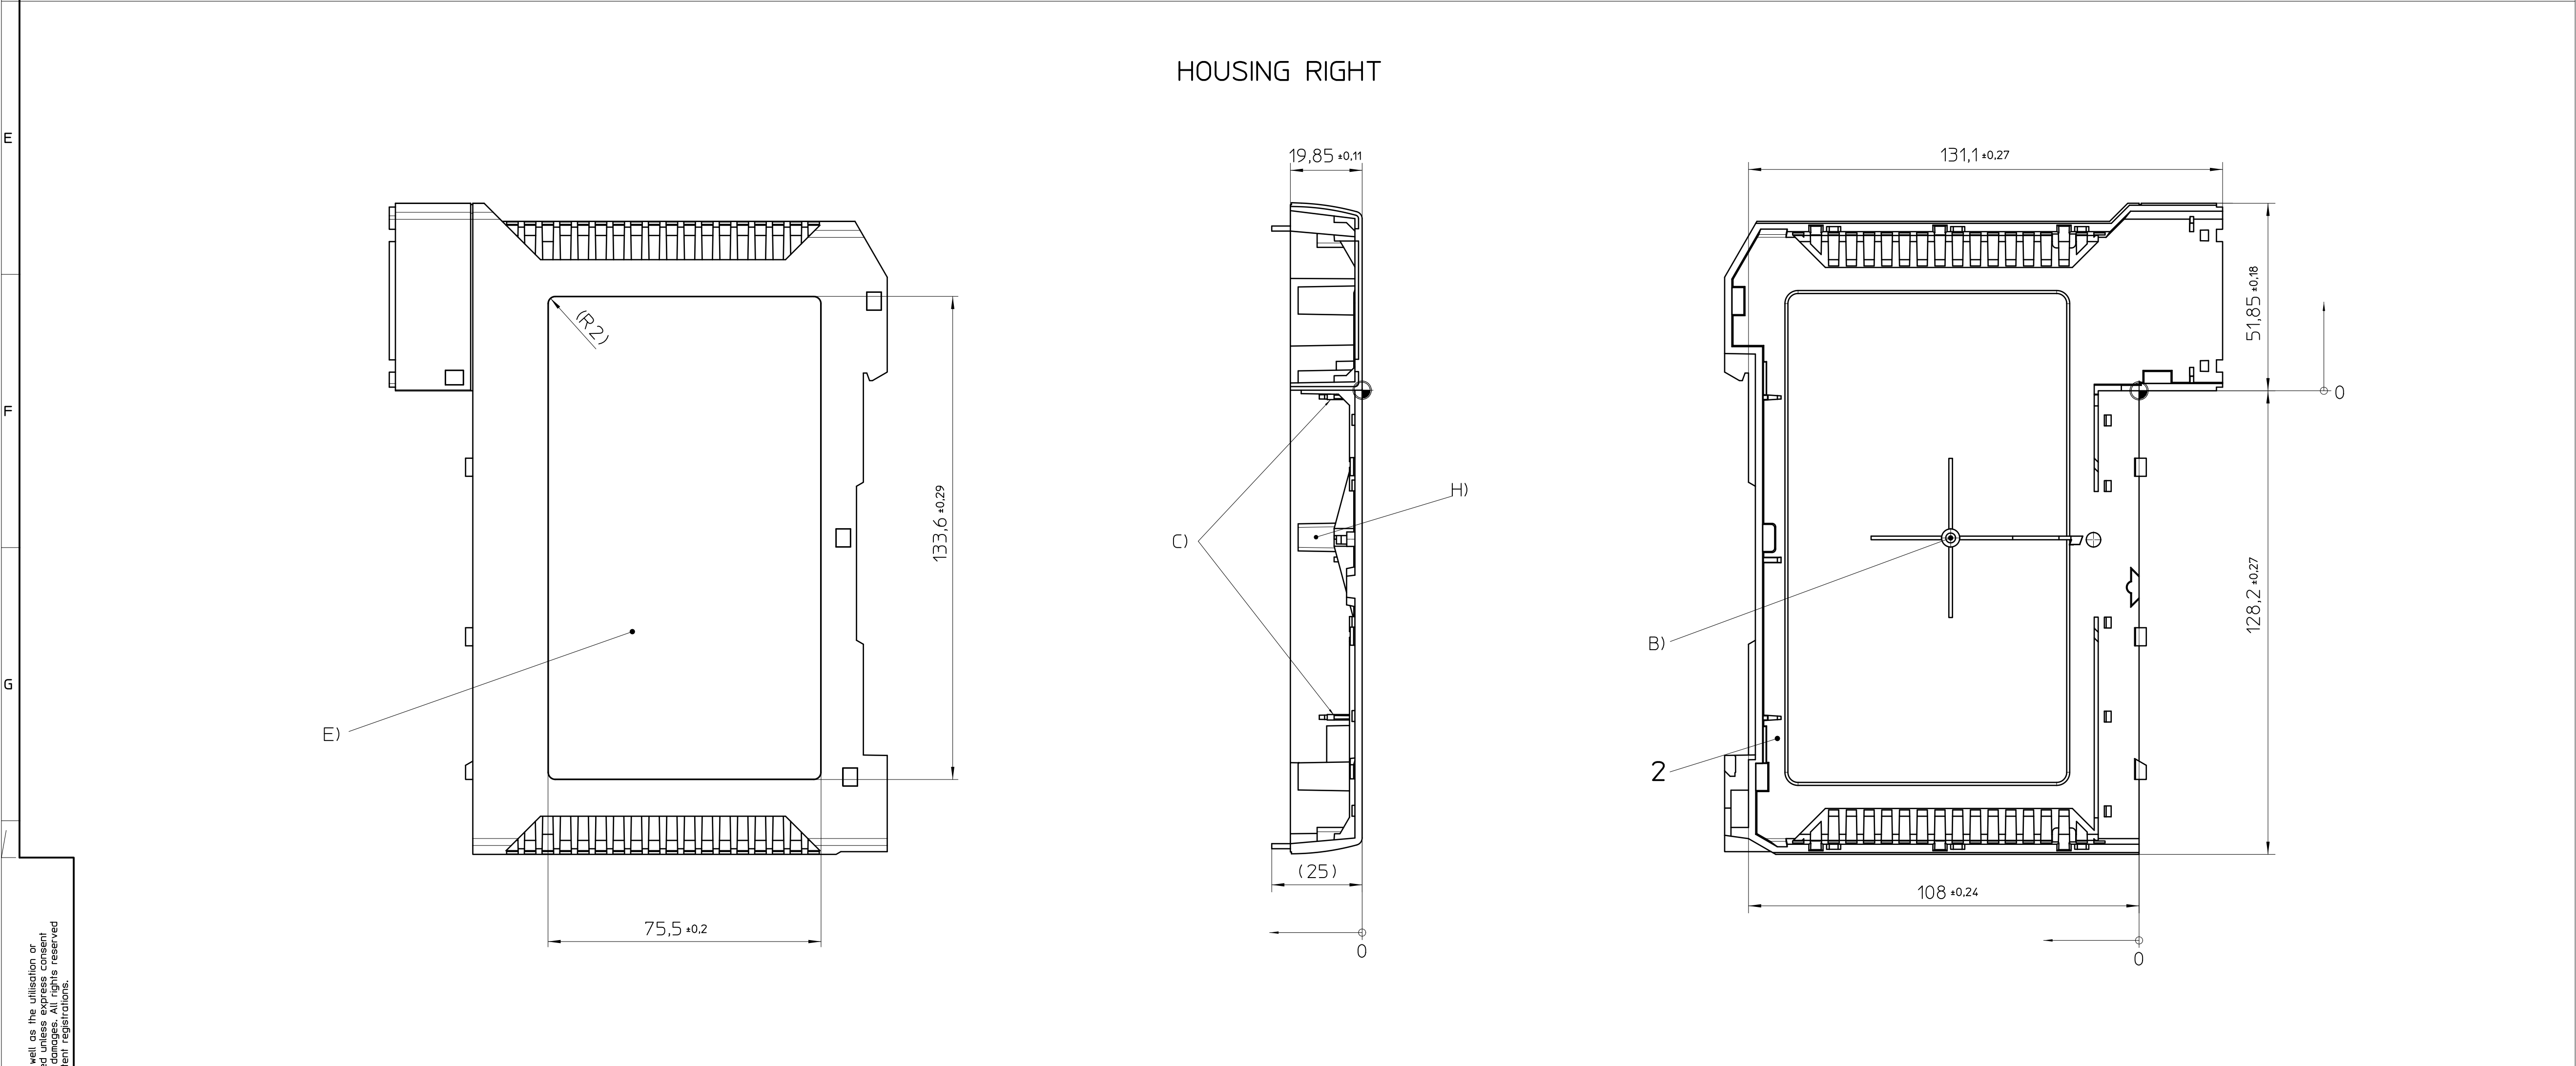


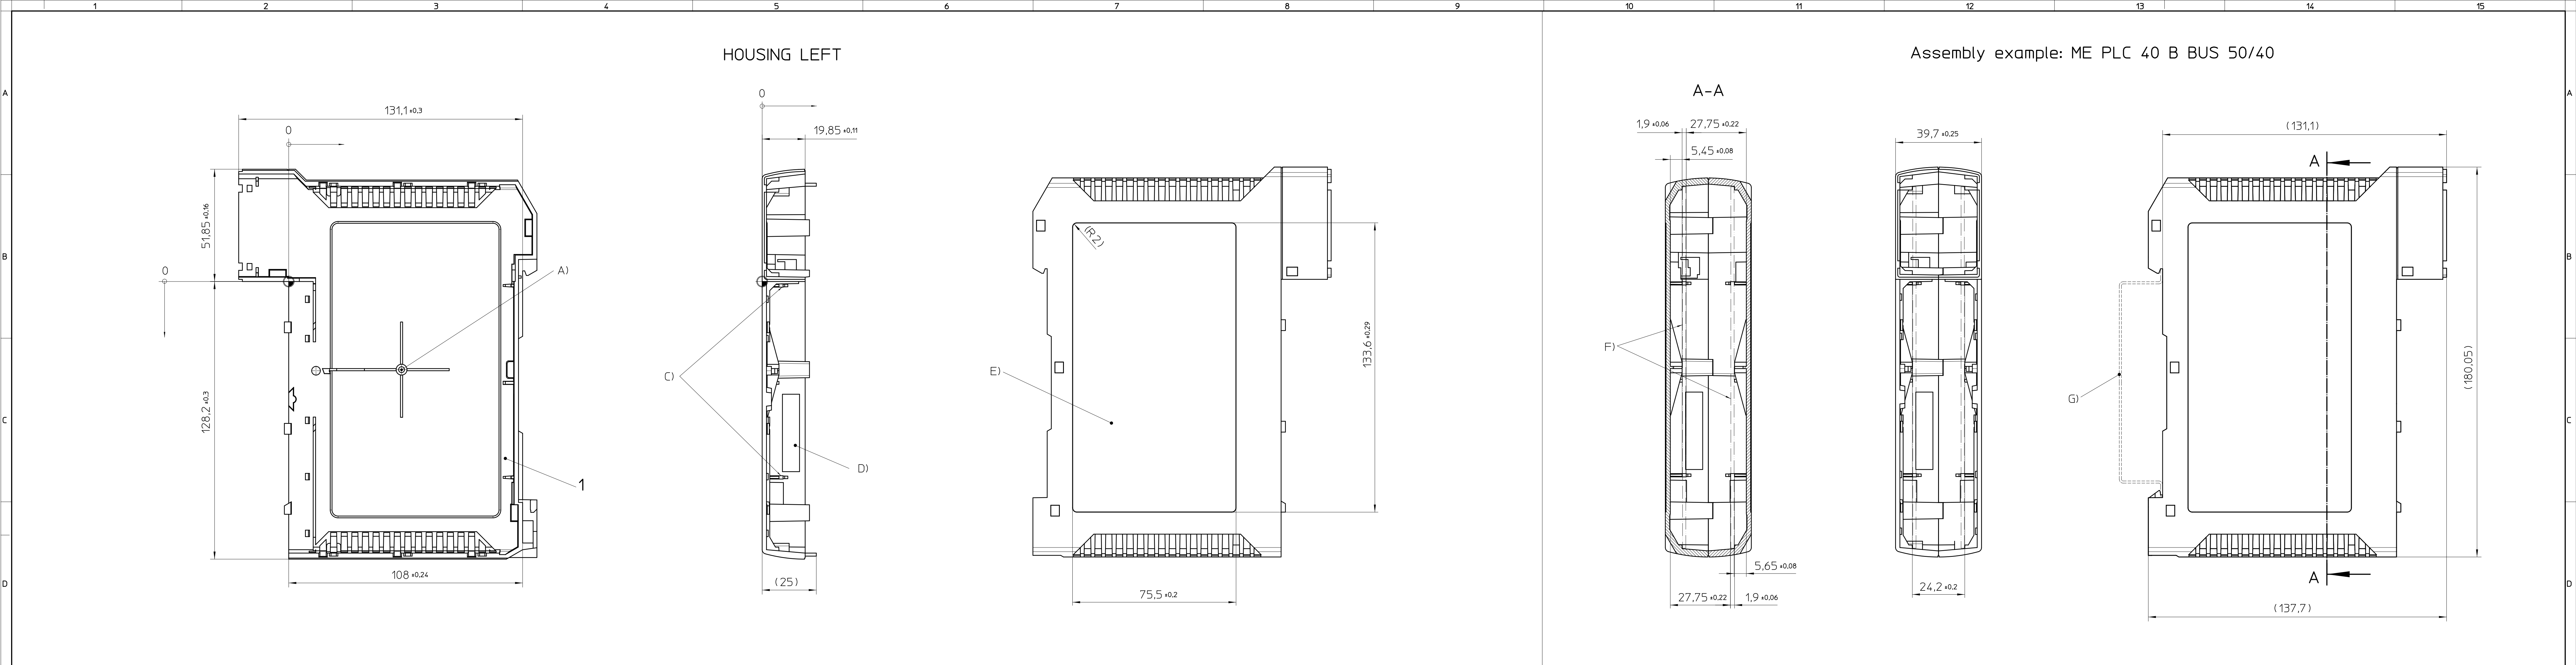

General Information

- Simplified representation
- Document excluded from change process
- Linear dimensions [mm]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Further information: www.phoenixcontact.com webcode: #0309
- = workpiece zero point for mechanical processing

A) Screw dome for fixing the left PCB
B) Screw dome for fixing the right PCB
C) PCB guidance
D) Breakthrough for ME-PLC 40 BUS 50/40
E) Labeling area
F) PCB (t=1,6±0.2)
G) Mounting rail: TH 105-20
H) Screwdome (ø2,7x5,95) deep

Pos.	QTY	Description	Material
1	1	HOUSING LEFT	PC
2	1	HOUSING RIGHT	PC
3	1	FOOT CATCH	STL
4	1	SPRING	STL

KIT (not mounted)	
Pos.	QTY
1	1
2	1
3	1
4	1

DIN A0	
document-no.	document-type
00914096 / 00	TECDOC 20_Productdrawing
2202057	
date	08.02.2018
author	11

ME PLC 40 B BUS 50/40 7035VPE1