
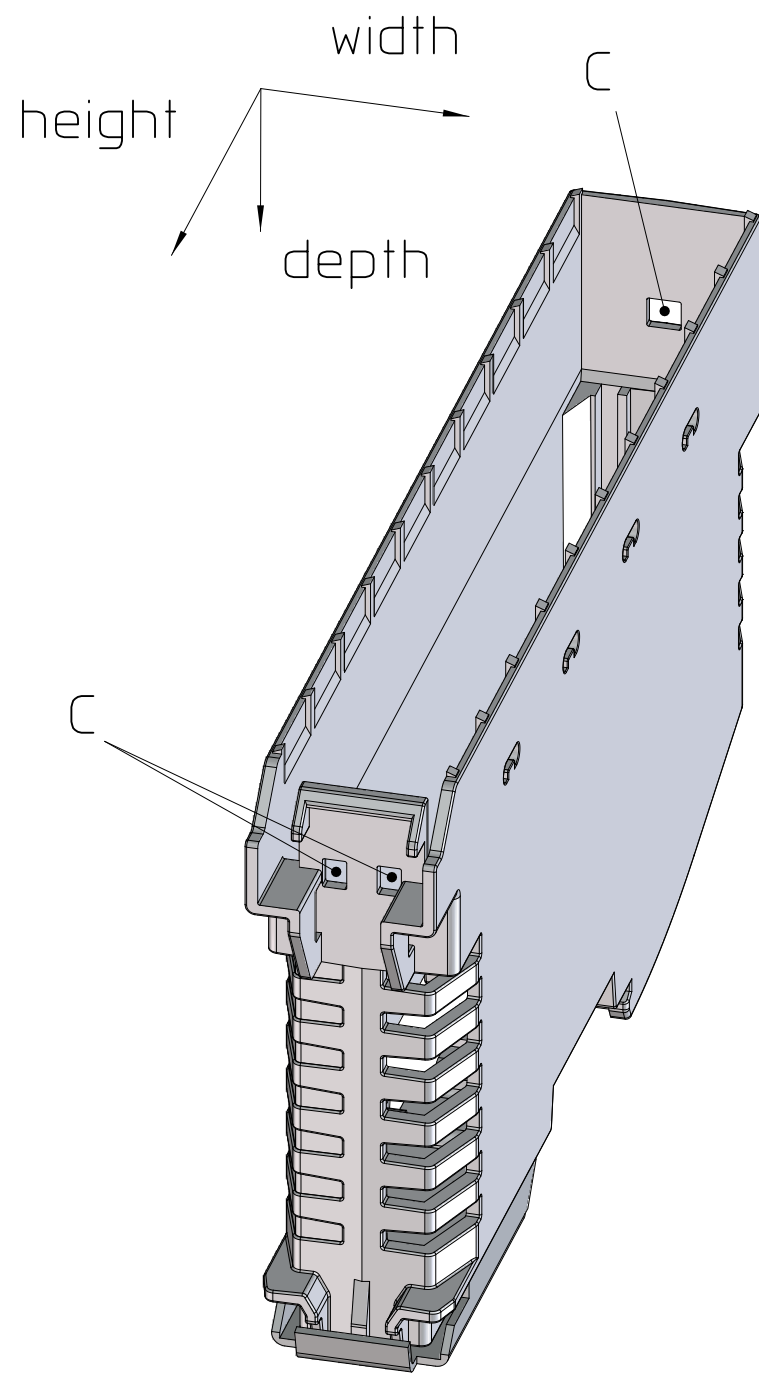
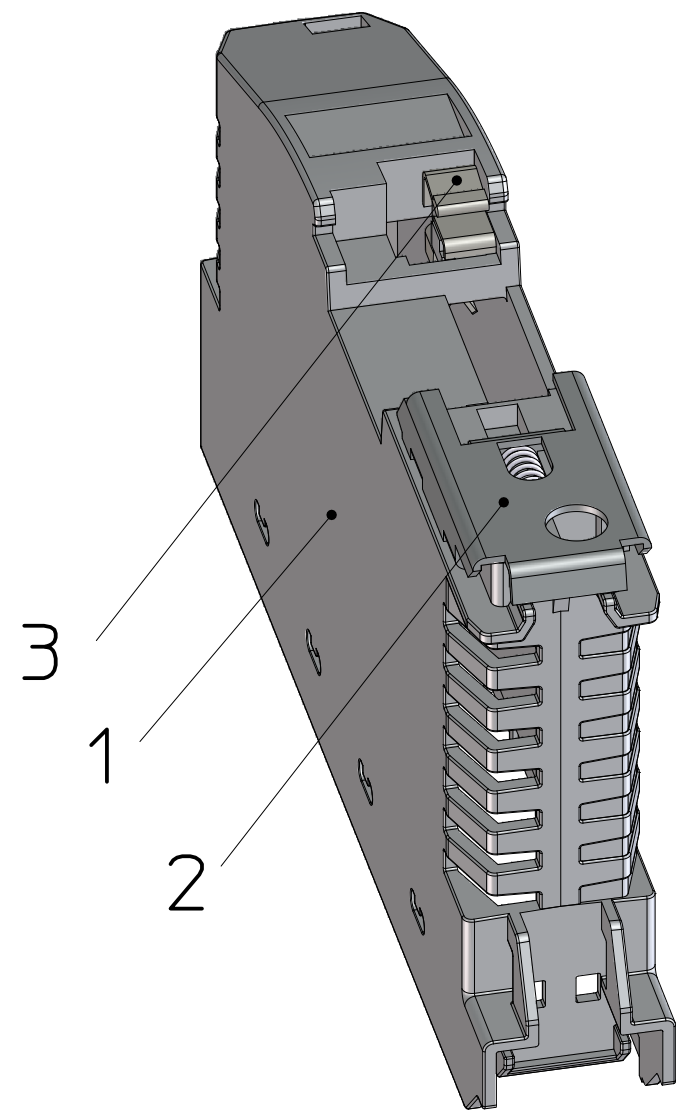


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

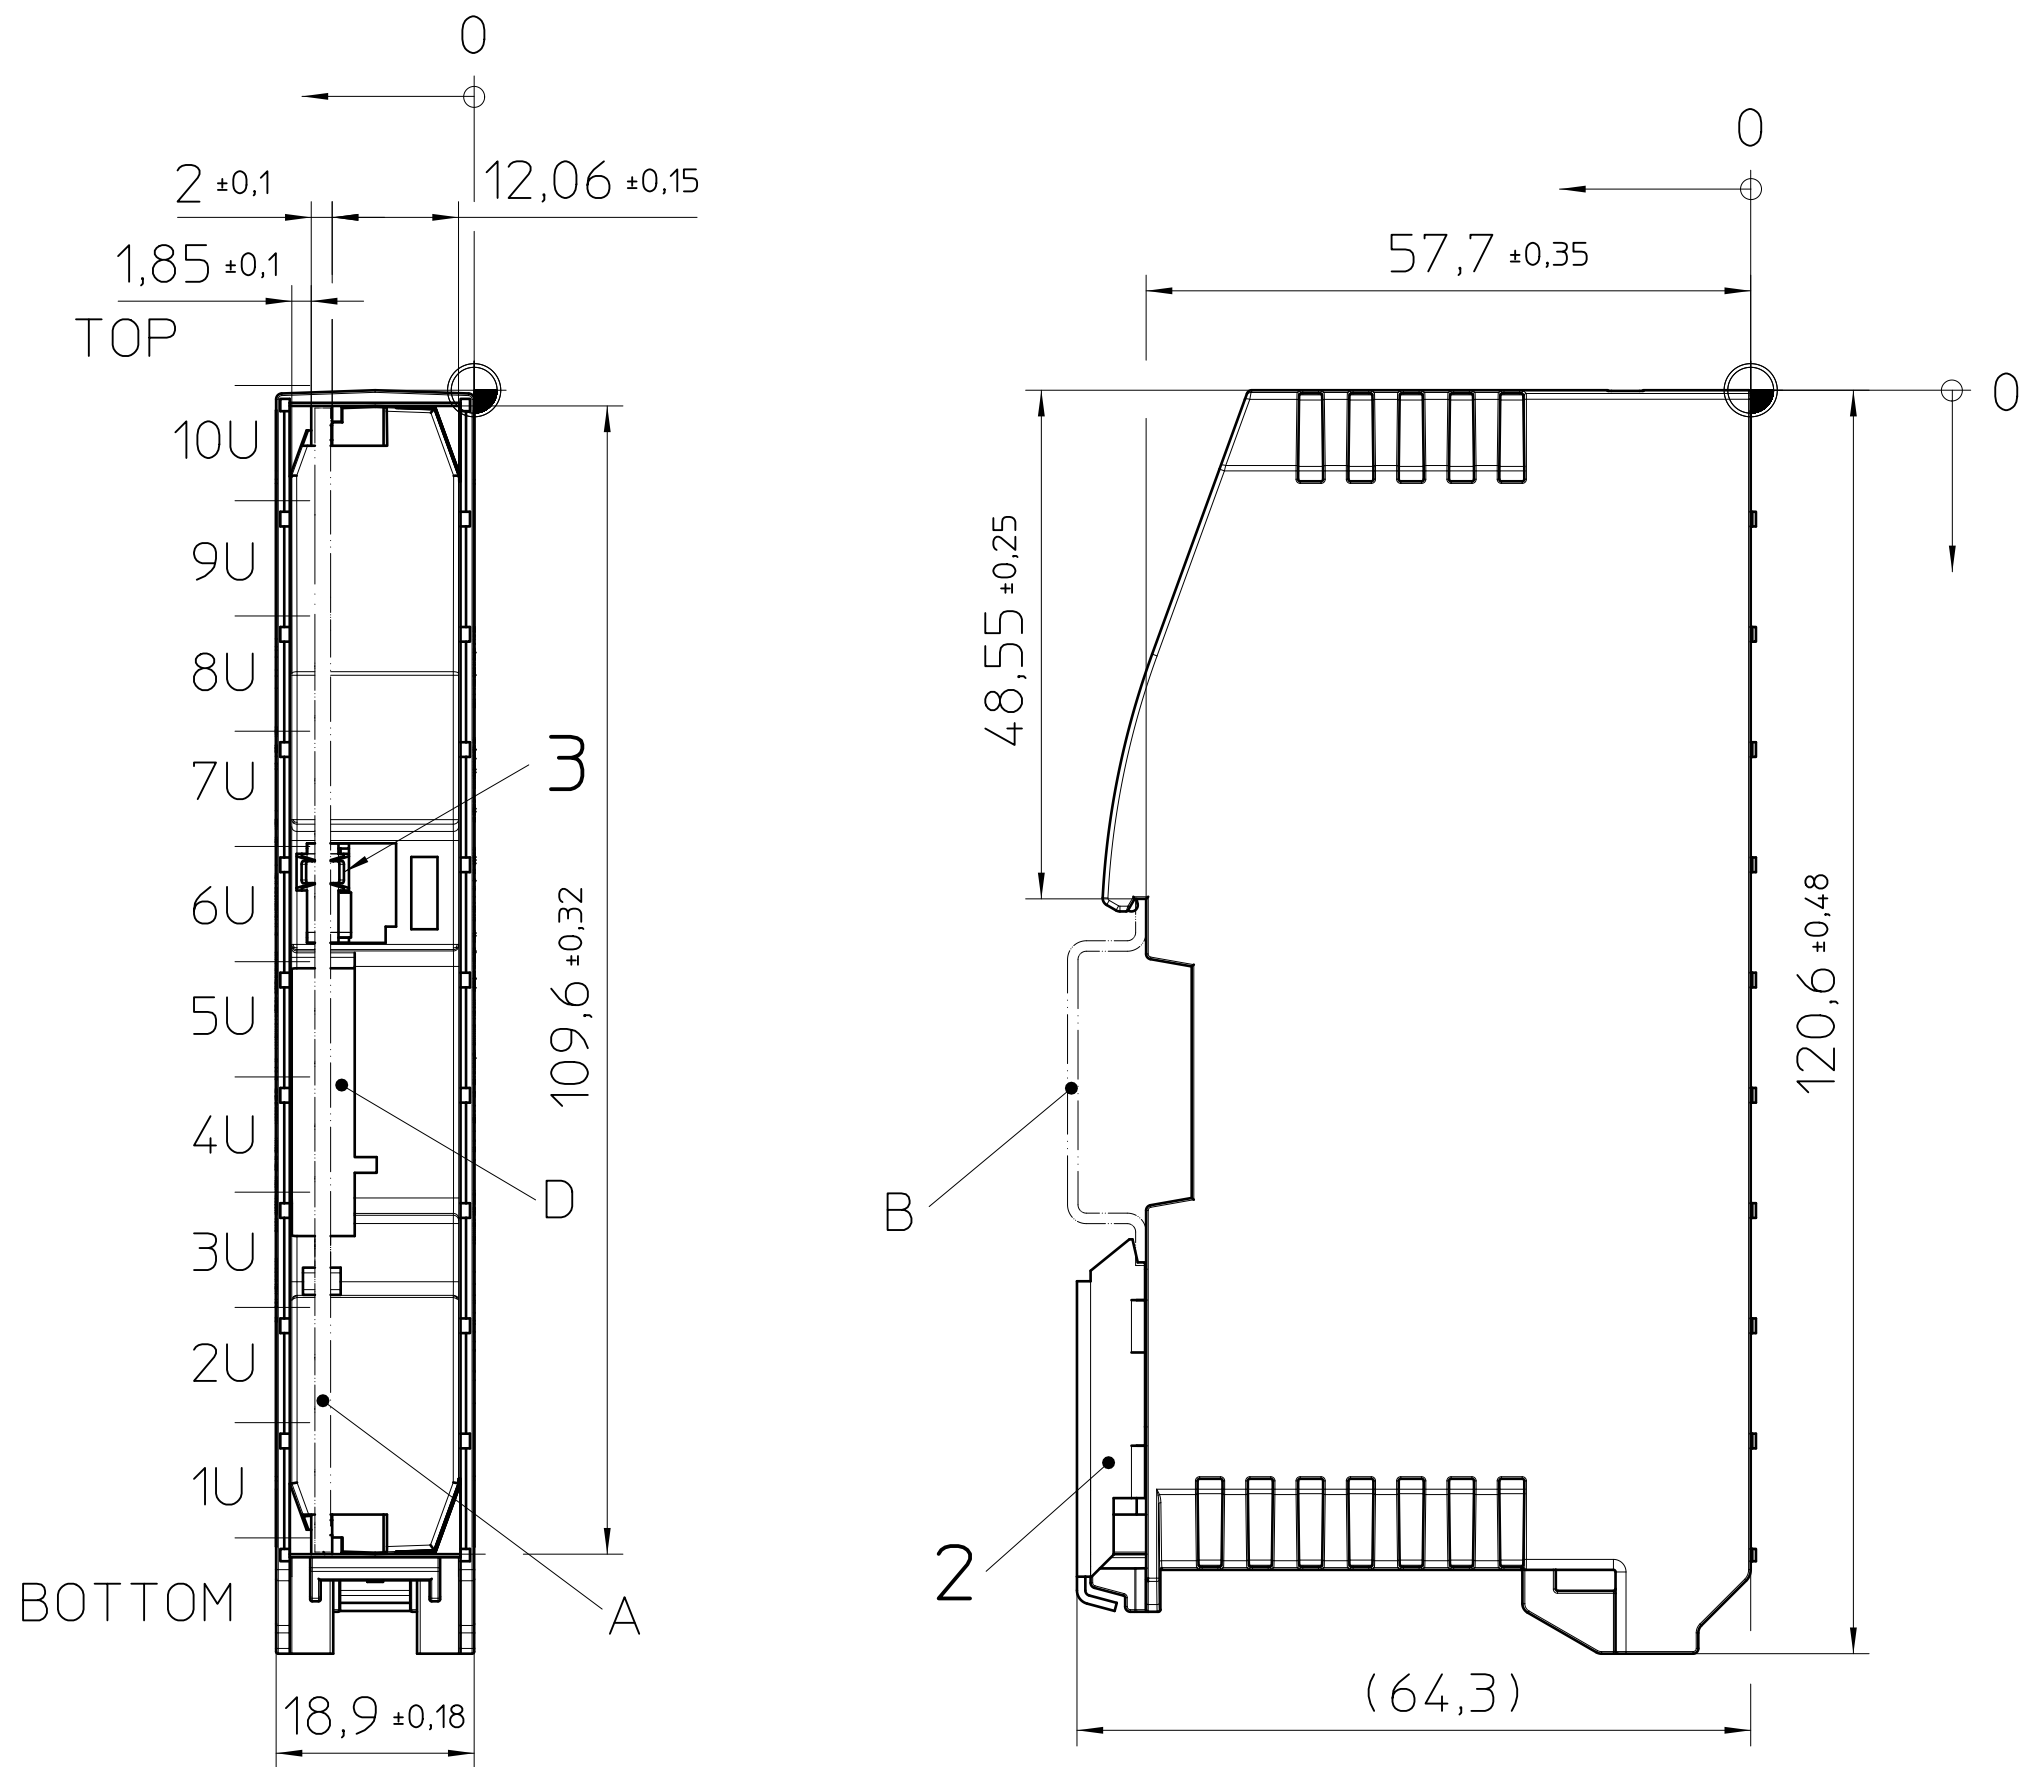

- General Information
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2 PA plastic parts with about 2% (% by weight) moisture content.
 - In case of distortion there is no functional impact of the single part in the application.
 - Web: www.phoenixcontact.com webcode: #0308

- General Information
- A. PCB $t=1,6\pm0,2$
 - B. Mounting rail like EN 60715: TH 35-7,5 or mounting rail TH 35-15x1,5 similar to EN 60715
 - C. Opening for fixing ME-IO Cover...
 - D. Guidance slot for TBUS..
 - E. PCB Fixing



 = Workpiece zero point for mechanical processing

Pos.	QTY	description	material	 DIN A3	document-no. / ri		article-no.	scale	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
1	1	HOUSING	PA		00907928 / 04		2202507	1:1	
2	1	FOOT CATCH with SPRING	St, X12CrNi			date	document-type		
3	1	FE CONTACT	Cu alloy			28.04.2025	TECDOC 2D_Productdrawing		
				page 1	of 2	description			
ME-IO 18,8 B/FE 10U TBUS 7035									

B

A



Marking area

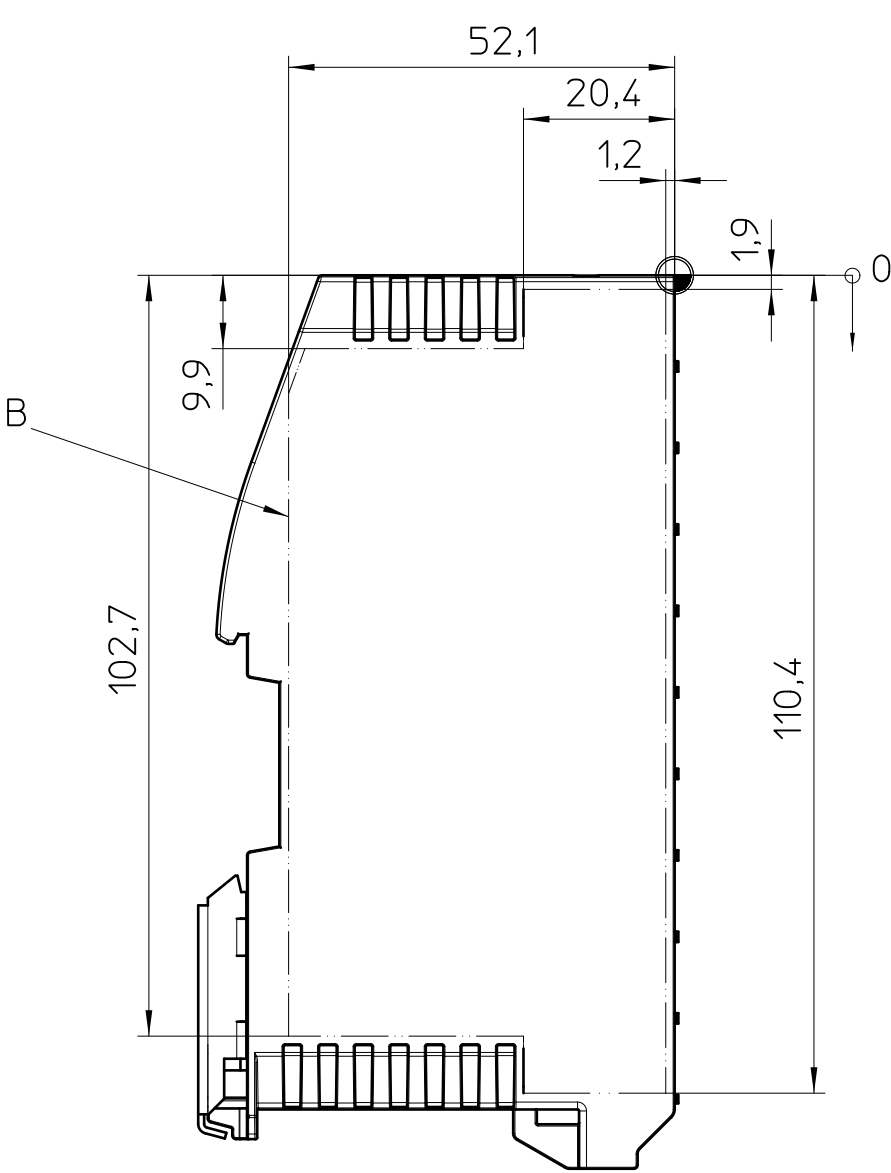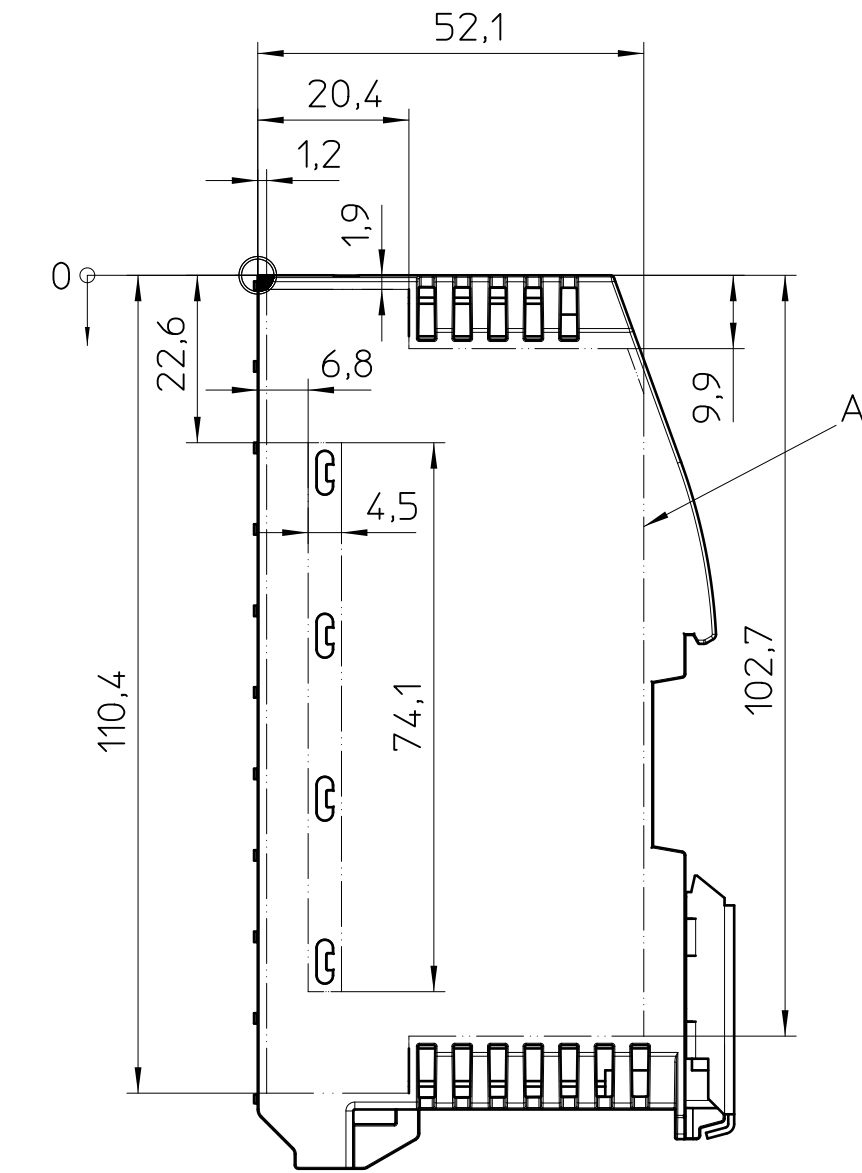

B

A

Machining area

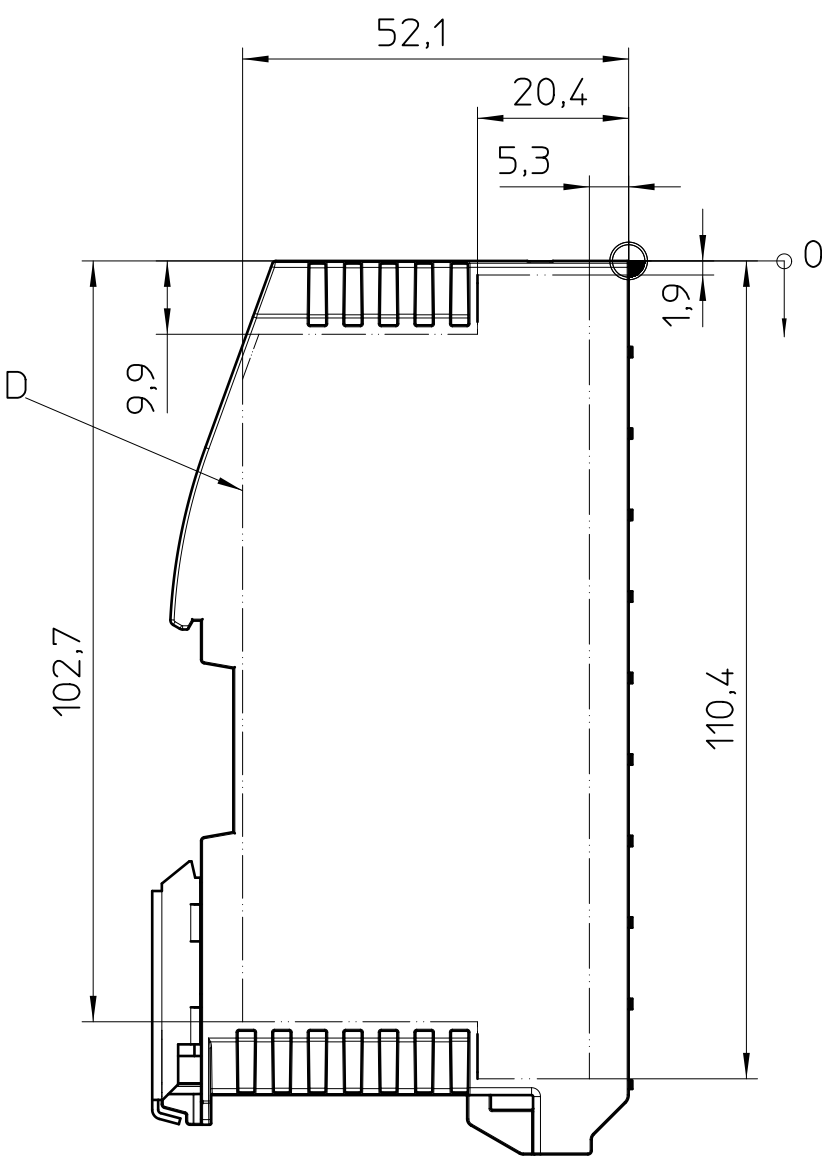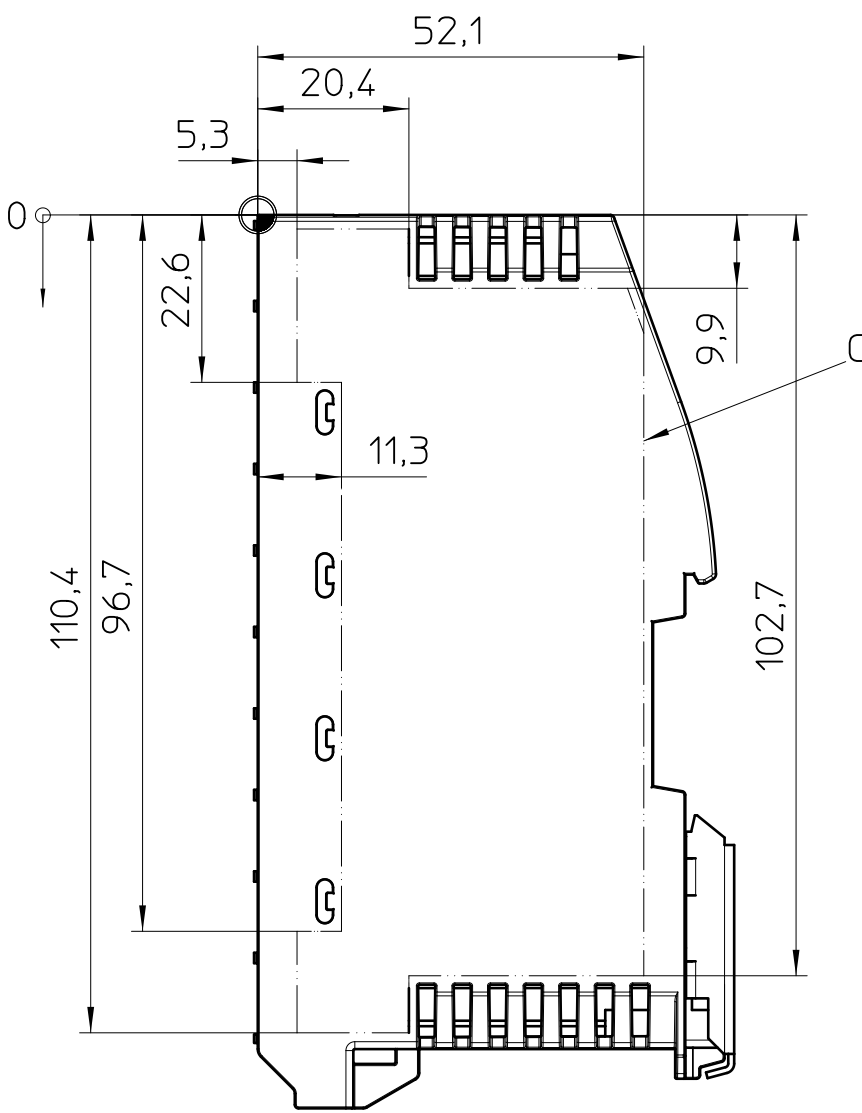

D

F

General Information:

- Simplified representation
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
-  Workpiece zero point for mechanical processing
- Tolerances for marking and machining DIN ISO 2768-m
- For milling > 50% of the machining area, the machinability should be verified.
- In case of distortion there is no functional impact of the single part in the application.
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:

A. Max. marking area right

B. Max. marking area left

C. Max. machining area right

D. Max. machining area left

 DIN A2	document-No. / RI	date	scale
	00907928 / 04	28.04.2025	1:1
	ident.-No.	document-type	
		TECDOC 2D_Productdrawing	
description		ME-IO 18,8 B/FE 10U TBUS 7035	
page 2	of 2		

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.