
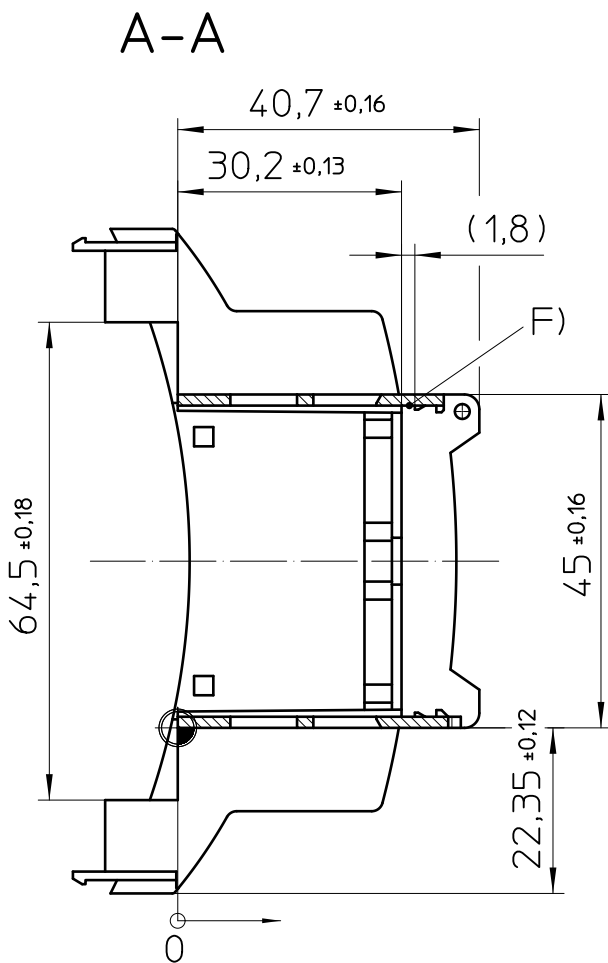
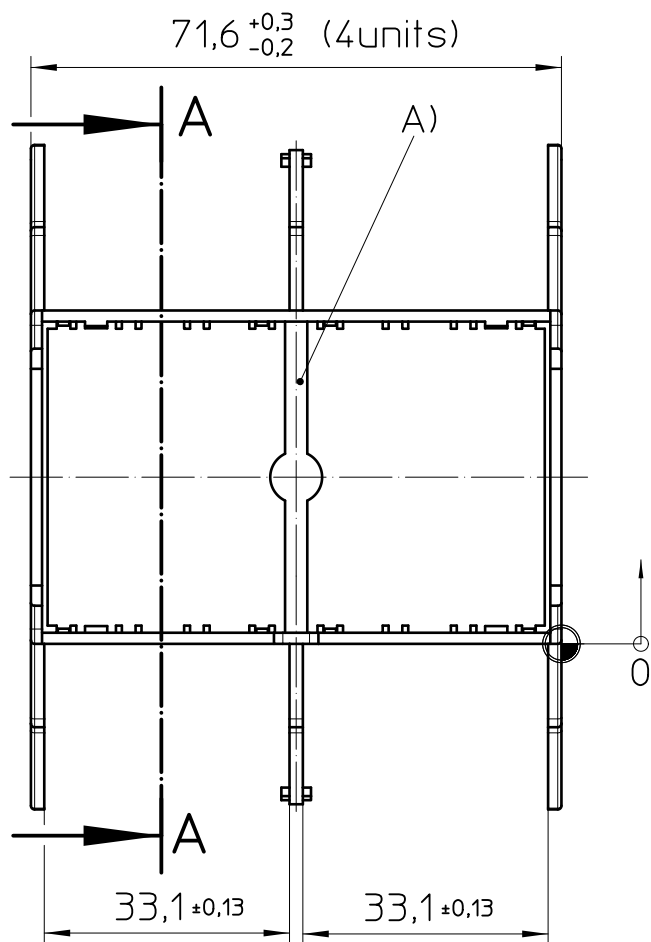
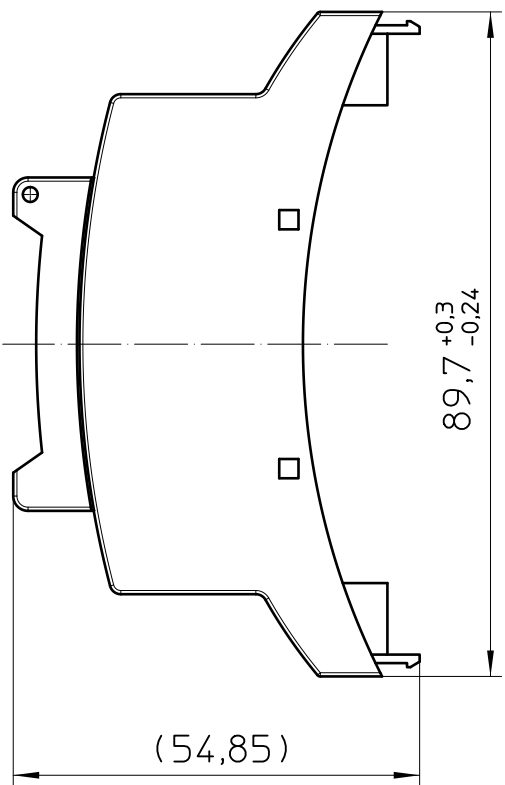
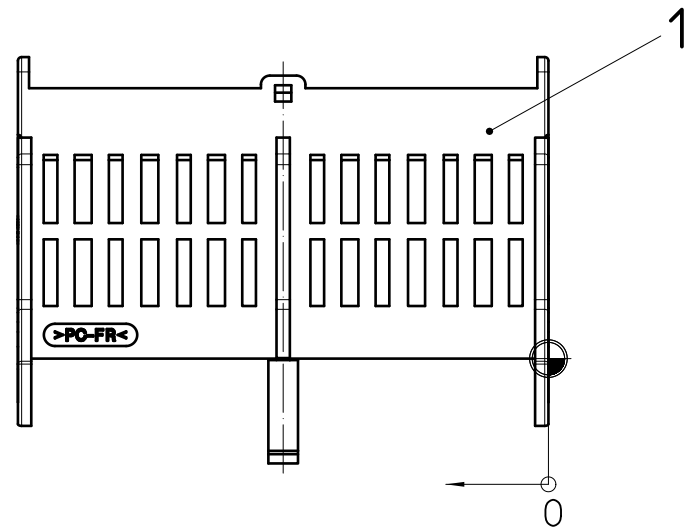
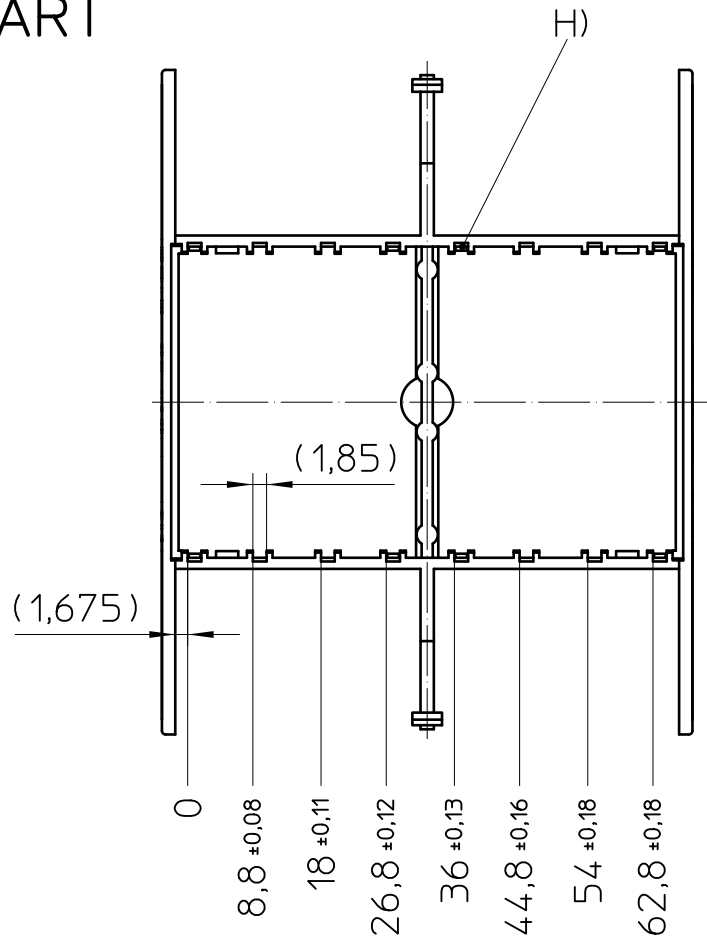






HOUSING UPPER PART

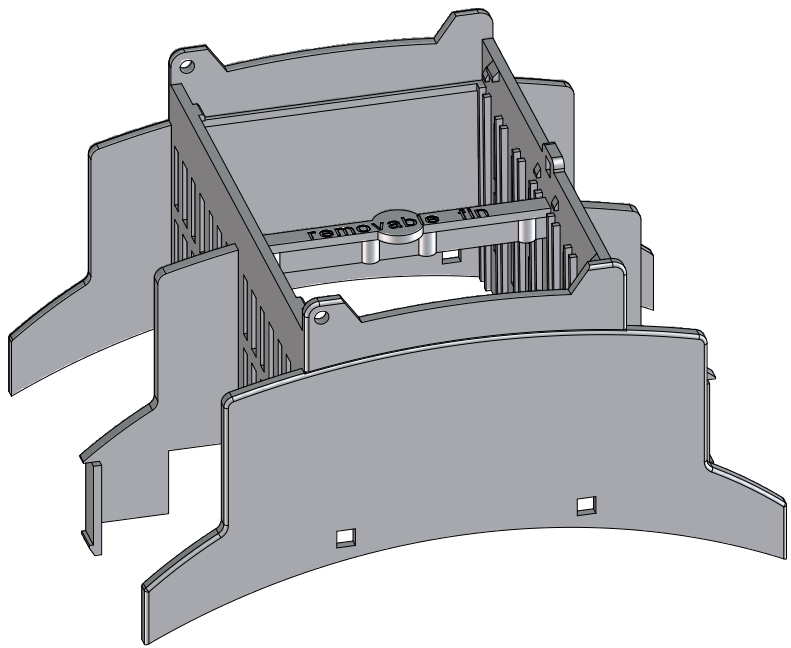

- General Information:
- Simplified representation, exemplary shown in gray
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing are ISO 2768-mK
 - Tolerances for printing DIN ISO 2768-m
 - Machining radii min. R1, further on request
 - Web: www.phoenixcontact.com


Assembly example

Overall dimensions compliant DIN 43880

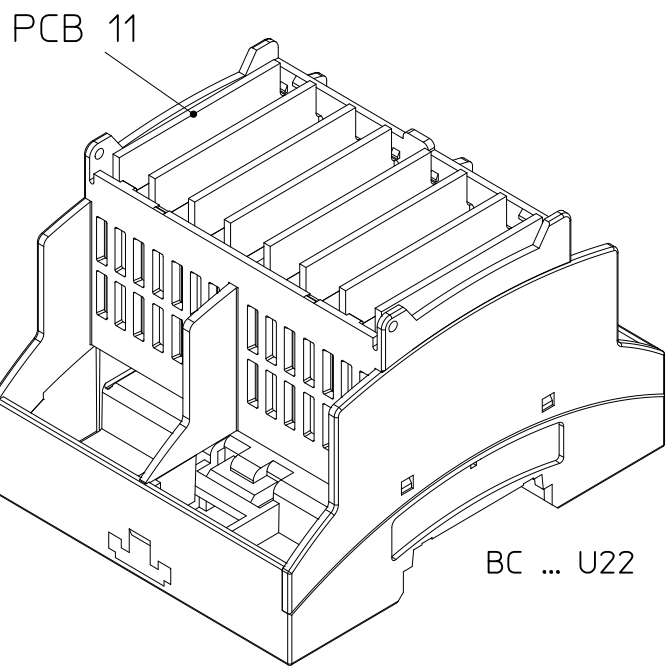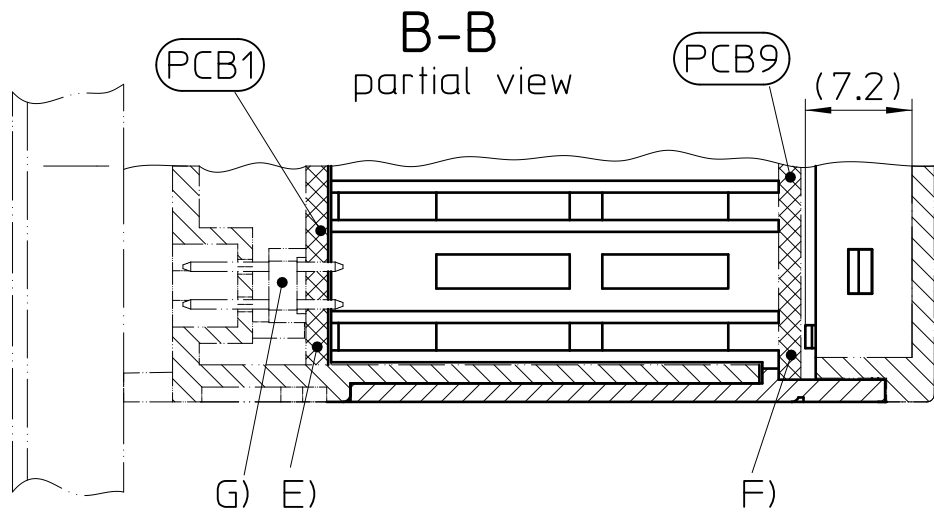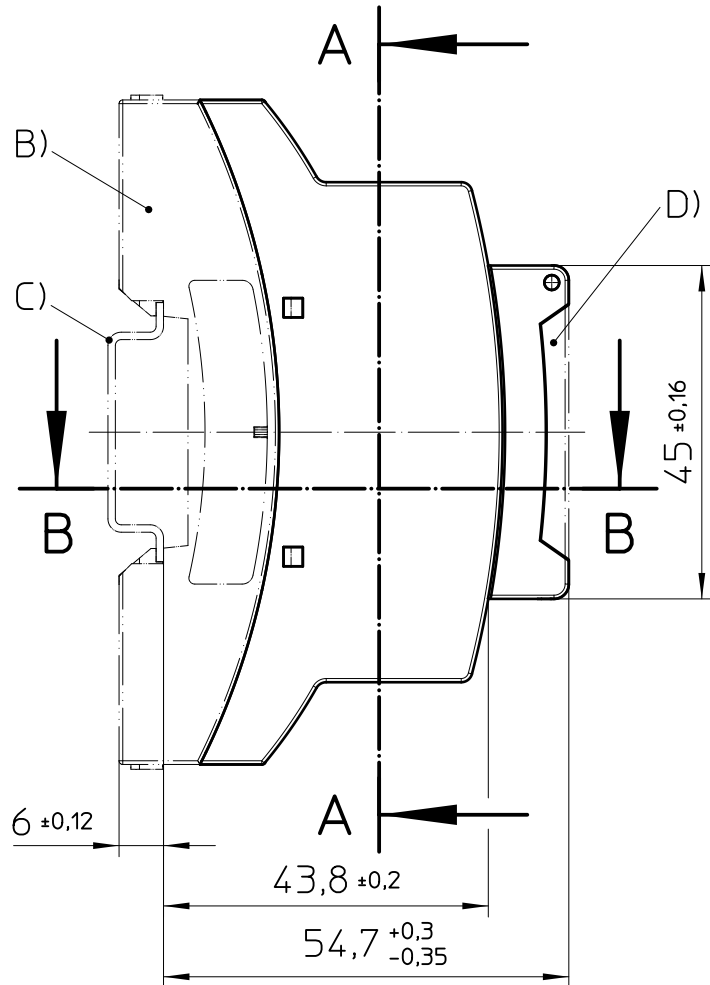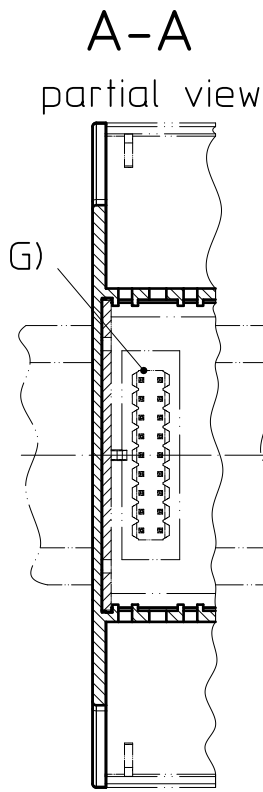

- A) If PCB 7+8 used, the fin has to be removed
B) Housing lower part
C) Mounting rail like EN 60715: TH 35-7,5 or mounting rail TH 35-15x1,5 similar to EN 60715
D) Cover
E) PCB 1 (main PCB)
F) Position PCB 9 or position plate
G) Header for HBUS (PSTD 0,65X0,65/9-2,54)
H) PCB guidance for vertical PCB 11

Pos.	QTY	Description	Material
1	1	HOUSING UPPER PART	PC
DIN A2		document-no. / article-no. 00907829 / 02 2202988	state 1:1
date 04.02.2025		document-type TECDOC 2D_Productdrawing	document excluded from change process
description BC 71,6 OT U22 BK		Linear dimensions [mm]	
page 1	of 2		

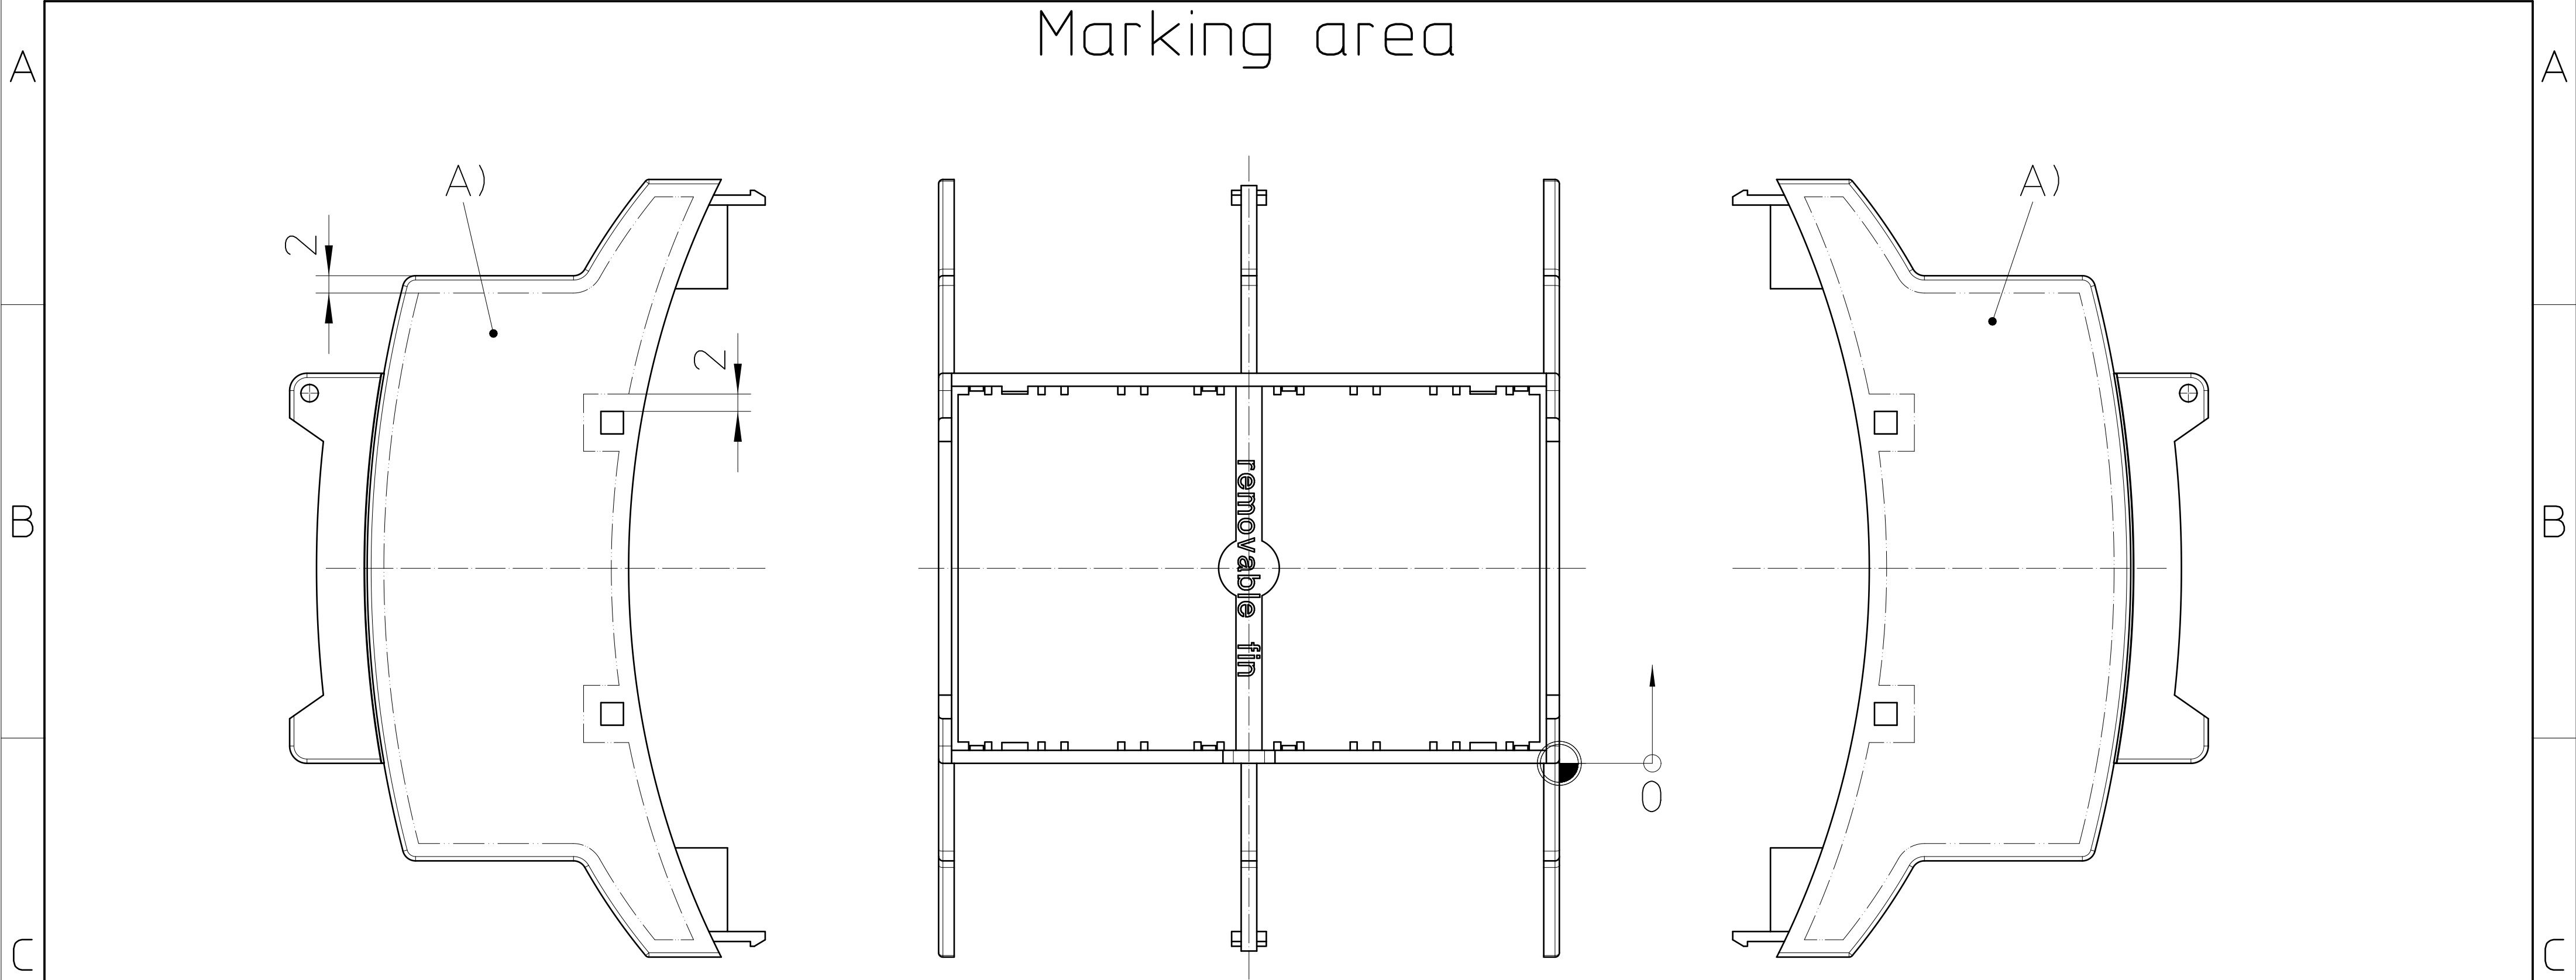


General Information:

- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
-  Workpiece zero point for mechanical processing
- Tolerances for mechanical processing are ISO 2768-mK
- Tolerances for printing DIN ISO 2768-m
- Machining radii min. R1, further on request
- Web: www.phoenixcontact.com

Additional information:

A) Max. marking area left and right for pad printing and laser printing

The marking area has 2mm distance from all contours of this face

 DIN A4		document-no. / ri 00907829 / 02		article-no. 2202988		scale 1:1		- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		date 04.02.2025		document-type TECDOC 2D_Productdrawing				
		description BC 71,6 OT U22 BK						
page 2		of 2						